

IP Telephony



VPA-100

SIP Public Announcement Adapter with PoE



1. Physical Introduction

The VPA-100 provides LAN2 for network expansion.

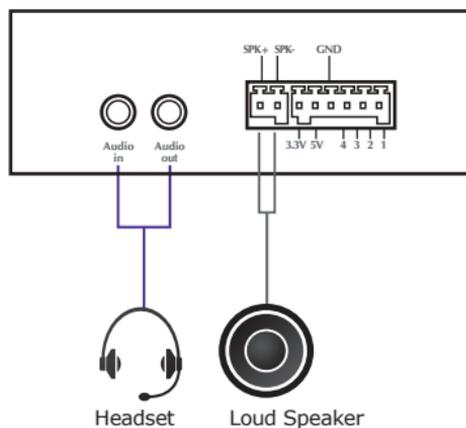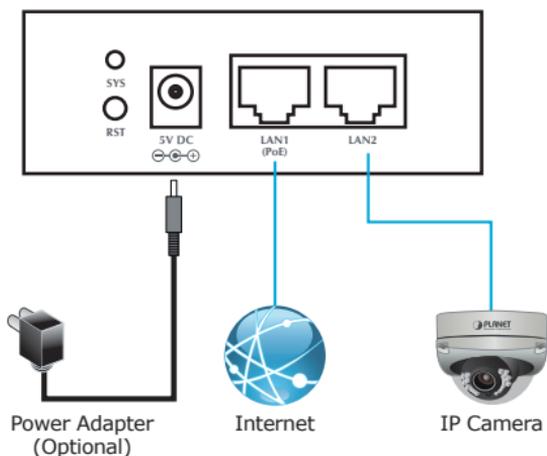


See below the descriptions of other interfaces

Interface		Description
1	SYS	This LED flashing when power on 40-50 seconds
2	RST	Press button 10 seconds continuously to reset default
3	5V DC	Power port
4	LAN1	Connects to internet and provides PoE function
5	LAN2	Connects other devices for network expansion
6	Audio in	Connects to microphone
7	Audio out	Connects to speaker
8	SPK+	Connects to "+" loud speaker
9	SPK-	Connects to "-" loud speaker
10	3.3V	Power supply for devices, max. 500mA
11	5V	Power supply for devices, max. 200mA
12	GND	Ground
13	1, 2, 3, 4	Output port, output current 8mA. When any IP phone is dialed to VPA-100, press 1* to enable/disable port1 output. For other ports, press 2* for port2, 3* for port3 and 4* for port4.

2. Hardware Installation

Step 1. Connecting Power via PoE Interface and Network


The VPA-100 can be configured without external power if connected to an IEEE 802.3af PSE device such as 802.3af PoE injector/hub or 802.3af PoE switch.

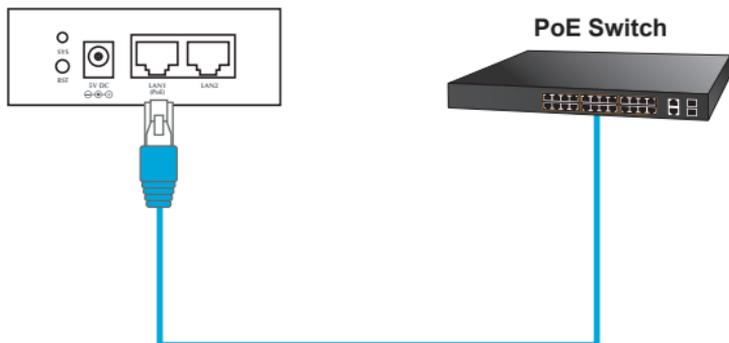

1. Use of any non-standard PoE injector could damage the device.
2. Be reminded to power either from AC adapter (optional) or PoE switch.

Step 2. Computer Network Setup

Set your computer's IP address to 172.16.0.x, where x is a number between 2 to 254 (except 1 which is being used for the camera by default). If you don't know how to do this, please ask your network administrator.

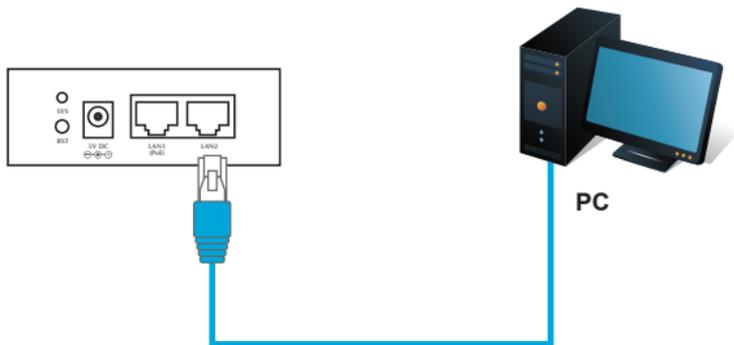

Step 3. Login Prompt

Use web browser (Internet Explorer 8.0 or above) to connect to 172.16.0.1 (type this address in the address bar of web browser). You'll be prompted to input user name and password: **admin** and **123**, respectively.



Further Information

For further configuration, please refer to the user's manual, which can be downloaded from the website.

<http://www.planet.com.tw/en/support/download.php?type1=372&model=48840&type=3>



If you have any other question, please contact the dealer where you purchased this product or you can contact PLANET directly at the following email address: support_voip@planet.com.tw

www.PLANET.com.tw