

**Industrial 10/100/1000Base-T to
2 100/1000Base-X SFP Media Converter**

IGT-1205AT

User's Manual

Trademarks

Copyright © PLANET Technology Corp. 2013.

Contents are subject to revision without prior notice.

PLANET is a registered trademark of PLANET Technology Corp. All other trademarks belong to their respective owners.

Disclaimer

PLANET Technology does not warrant that the hardware will work properly in all environments and applications, and makes no warranty and representation, either implied or expressed, with respect to the quality, performance, merchantability, or fitness for a particular purpose.

PLANET has made every effort to ensure that this User's Manual is accurate; PLANET disclaims liability for any inaccuracies or omissions that may have occurred.

Information in this User's Manual is subject to change without notice and does not represent a commitment on the part of PLANET. PLANET assumes no responsibility for any inaccuracies that may be contained in this User's Manual. PLANET makes no commitment to update or keep current the information in this User's Manual, and reserves the right to make improvements to this User's Manual and/or to the products described in this User's Manual, at any time without notice.

If you find information in this manual incorrect, misleading, or incomplete, we would appreciate your comments and suggestions.

FCC Warning

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the Instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

CE Mark Warning

This is a Class A product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

WEEE Warning



To avoid the potential effects on the environment and human health as a result of the presence of hazardous substances in electrical and electronic equipment, end users of electrical and electronic equipment should understand the meaning of the crossed-out wheeled bin symbol. Do not dispose of WEEE as unsorted municipal waste and have to collect such WEEE separately.

Revision

PLANET Industrial 10/100/1000Base-T to 2 100/1000Base-X SFP Media Converter User's Manual

For Model: IGT-1205AT

Revision: 1.0 (APRIL, 2013)

Part No: EM-IGT_1205AT_v1.0 (2350-AH1210-000)

Table of Contents

1. Introduction.....	5
1.1 Package Contents.....	5
1.2 How to Use This Manual.....	5
1.3 Product Features.....	6
1.4 Product Specifications.....	7
1.5 Physical Dimensions.....	9
2. Installation.....	10
2.1 Product Description.....	10
2.1.1 Converter Front Panel.....	12
2.1.2 LED Indicators.....	13
2.1.3 Converter Upper Panel.....	14
2.1.4 Wiring the Power Inputs.....	15
2.1.5 Wiring the Fault Alarm Contact.....	16
2.1.6 Cabling.....	16
2.1.7 Redundancy Overview.....	22
2.2 Mounting Installation.....	23
2.2.1 Install DIN-Rail Mounting.....	23
2.2.2 Wall Mount Plate Mounting.....	25
3. Applications.....	26
4. Troubleshooting.....	28
5. Cable Connection Parameters.....	29
APPENDIX A: Networking Connection.....	30
A.1 Converter's RJ-45 Pin Assignments.....	30
A.2 RJ-45 Cable Pin Assignments.....	31

1. Introduction

1.1 Package Contents

Check the contents of your package for the following parts:

- Industrial Gigabit Media Converter x 1
- User's Manual x 1
- DIN Rail Kit x 1
- Wall Mount Kit x 1

If any of these are missing or damaged, please contact your dealer immediately; if possible, retain the carton including the original packing material, and use them against to repack the product in case there is a need to return it to us for repair.

The term "**Industrial Gigabit Media Converter**" mentioned in this user's manual also means the IGT-1205AT.

1.2 How to Use This Manual

This Industrial Gigabit Media Converter User Manual is structured as follows:

Chapter 2 Installation

The chapter explains the feature, functionality and the physical installation of the Industrial Gigabit Media Converter.

Chapter 3 Application

The chapter explains the Industrial Gigabit Media Converter application.

Chapter 4 Troubleshooting

The chapter explains the troubleshooting of the Industrial Gigabit Media Converter.

Chapter 5 Cable Connection Parameters

The chapter contains the cable connection parameters of the Industrial Gigabit Media Converter.

Appendix A

This chapter contains cable information of the Industrial Gigabit Media Converter.

1.3 Product Features

Physical Port

- 1-port 10/100/1000Base-T RJ-45 with auto MDI / MDI-X function
- 2 SFP interfaces, 100/1000Base-X dual mode (DIP switch control)

Layer 2 Features

- IEEE 802.3 / 802.3u / 802.3ab / 802.3z Ethernet Standard Compliant
- Supports Auto-negotiation and 10/100Mbps half / full duplex and 1000Mbps full duplex mode
- Prevents packet loss with back pressure (Half-Duplex) and IEEE 802.3x PAUSE frame flow control (Full-Duplex)
- 9K Jumbo Frame Size support
- Automatic address learning and address aging

Industrial Case / Installation

- Slim type IP30 metal case / protection
- DIN Rail and Wall Mount Design
- Redundant Power Design
 - 12 to 48V DC, redundant power with polarity reverse protect function
 - AC 24V power adapter acceptable
- Supports EFT protection for 6000 VDC for power line
- Supports 6000 VDC Ethernet ESD protection
- -40 to 75 degrees C operating temperature

Fiber Port Redundancy

- Link status auto-detect and redundant on Dual ports with same connector type
- Only when Primary-Port is active, the Backup-Port is blocked

- When Primary-Port link fails, the traffic will swap to Backup-Port automatically
- Once the Primary-Port status is back to link up, the traffic will swap from Backup-Port to Primary-Port


1.4 Product Specifications

Model	IGT-1205AT
Hardware Specification	
10/100/1000Base-T Ports	1
SFP Interfaces	2 1000Base-SX/LX/BX SFP interfaces (Port-1 and Port-2) Compatible with 100Base-FX SFP
Dimensions (W x D x H)	135 x 87 x 32mm
Weight	505g
Power Requirements	DC 12~48V, Redundant power with polarity reverse protection function. AC 24V Power Adapter
Power Consumption / Dissipation	4.8 watts/16BTU
Installation	DIN Rail Kit and Wall Mount Ear
Converter Specification	
Processing Scheme	Store-and-Forward
Flow Control	Back pressure for half duplex IEEE 802.3x Pause Frame for full duplex
Fabric	6Gbps
Throughput (packet per second)	4.46Mpps
Maximum Transmission Unit	9216bytes

Network Cables	<p>10/100/1000Base-T : Cat. 3, 4, 5, 5e, 6 UTP cable (100meters, max.) EIA/TIA-568 100-ohm STP (100meters, max.)</p> <p>1000Base-SX : 50/125µm or 62.5/125µm multi-mode fiber optic cable, up to 550m (vary on SFP module)</p> <p>1000Base-LX : 9/125µm single-mode fiber optic cable, up to 10/20/30/40/50/70/120 kilometers (vary on SFP module)</p> <p>100Base-FX : 50/125µm or 62.5/125µm multi-mode fiber optic cable, up to 2 kilometers (vary on SFP module) 9/125µm single-mode fiber optic cable, up to 20/40/60 kilometers (vary on SFP module)</p>
Standards Conformance	
Standards Compliance	<p>IEEE 802.3 Ethernet IEEE 802.3u Fast Ethernet IEEE 802.3ab Gigabit Ethernet IEEE 802.3z Gigabit Ethernet IEEE 802.3x Full-Duplex Flow Control</p>
Regulation Compliance	FCC Part 15 Class A, CE
Stability Testing	<p>IEC60068-2-32 (Free fall) IEC60068-2-27 (Shock) IEC60068-2-6 (Vibration)</p>
Environment	
Temperature	<p>Operating: -40~75 degrees C Storage: -40~75 degrees C</p>
Humidity	<p>Operating: 5~95% (Non-condensing) Storage: 5~95% (Non-condensing)</p>

1.5 Physical Dimensions

IGT-1205AT Industrial Gigabit Media Converter dimensions (W x D x H): 135 x 87 x 32mm

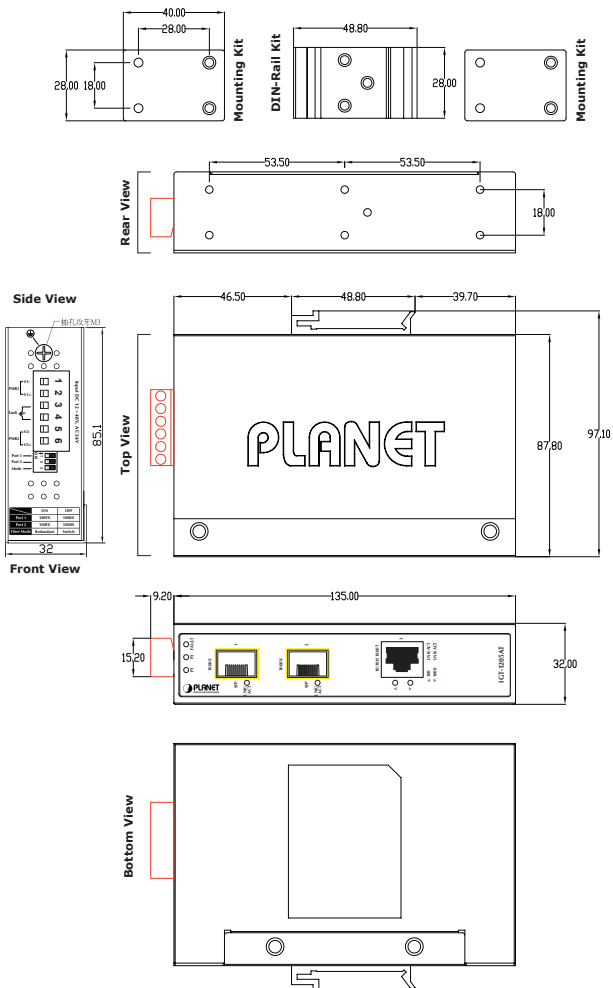

2. Installation

This section describes the functionalities of the Industrial Gigabit Media Converter's components and guides how to install it on the desktop. Basic knowledge of networking is assumed. Please read this chapter completely before continuing.

2.1 Product Description

Flexibility and Network Distance Extension Solution

The IGT-1205AT Industrial Gigabit Media Converter is equipped with one 10/100/1000Base-T auto-negotiation port and two 100/1000X SFP slots. The two SFP slots are compatible with 1000Base-SX / LX or 100Base-FX through SFP (Small Form Factor Pluggable) fiber-optic transceiver; the two SFP slots allow changing the operation speed mode with its built-in DIP switch. The fiber optical uplink capability guarantees the throughput to all nodes hooked into the network and the Gigabit Ethernet distance can be extended from 550 meters (Multi-Mode fiber cable) up to 10/20/30/40/50/70/120 kilometers (Single-Mode fiber cable), also the Fast Ethernet distance can be extended from 2km (Multi-Mode fiber cable) up to 20/40/60 kilometers (Single-Mode fiber cable). They are well suited for applications within the factory data centers and distributions.

Adjustable 3-Port Switch Mode or 2 Fiber Port Redundant Mode

Via the built-in DIP-switch, the two SFP fiber interfaces of IGT-1205AT can be configured as Ethernet switch mode or Fiber Redundant mode. With the Ethernet switch mode, it can operate Store-and-Forward mechanism with high performance; with the 2-Port Fiber Redundant mode, it provides redundancy of link for highly critical Ethernet applications. The redundant mode supports auto-recover function. If the destination port of a packet is link down, it forwards the packet to the other port of the backup pair.

Environmentally Hardened Design

With IP30 metal industrial case protection, the IGT-1205AT provides a high level of immunity against electromagnetic interference and heavy electrical surges which are usually found on plant floors or in curb side

traffic control cabinets. It also possesses an integrated power supply source with wide range of voltages (12 to 48V DC or 24V AC) for worldwide high availability applications requiring dual or backup power inputs. Being able to operate under the temperature range from -40 to 75 degrees C, the IGT-1205AT can be placed in almost any difficult environment. The compact IP30 standard metal case of IGT-1205AT allows either DIN rail or wall mounting for efficient use of cabinet space.

Robust Gigabit Media Converter Performance

The IGT-1205AT offers wire-speed packets transfer performance without risk of packet loss. The high data throughput of the device makes it ideal for most Gigabit environments. With a 6Gbps internal fabric and featuring auto negotiation support in its Gigabit port, the IGT-1205AT Industrial Gigabit Media Converter can handle large amounts of data in a secure topology linking to a backbone or high capacity servers.

The flow control function enables the IGT-1205AT to provide fast and reliable data transfer. The RJ-45 copper interface in the IGT-1205AT supports 10/100/1000Mbps Auto-Negotiation for optimal speed detection through RJ-45 Category 6, 5 or 5e cables. The standard Auto-MDI/MDI-X support can detect the type of connection to any Ethernet device without requiring special straight or crossover cables.

2.1.1 Converter Front Panel

Figure 2-1 shows the front panel of Industrial Gigabit Media Converter.

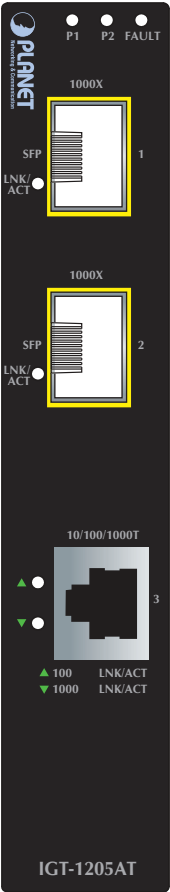


Figure 2-1: IGT-1205AT Front Panel

2.1.2 LED Indicators

System

LED	Color	Function
P1	Green	Lit: indicate power 1 has power.
P2	Green	Lit: indicate power 2 has power.
FAULT	Green	Lit: indicate either power 1 or power 2 has no power.

Per 10/100/1000T Port

LED	Color	Function
100 LNK/ACT	Orange	Lit: indicate the link through that port is successfully established at 100Mbps or 10Mbps. Blink: indicate that the Switch is actively sending or receiving data over that port. Off: indicate the link through that port is successfully established at 1000Mbps.
1000 LNK/ACT	Green	Lit: indicate the link through that port is successfully established at 1000Mbps or 10Mbps. Blink: indicate that the Switch is actively sending or receiving data over that port. Off: indicate the link through that port is successfully established at 100Mbps.

Per 100 / 1000X SFP Slots

LED	Color	Function
LNK/ACT	Green	Lit: indicate the link through that port is successfully established at 100Mbps or 1000Mbps. Blink: indicate that the Converter is actively sending or receiving data over that port or the port operate.

2.1.3 Converter Upper Panel

The upper panel of the Industrial Gigabit Media Converter consists of one terminal block connector within two DC power inputs, and also provides 3 DIP Switches for 100/1000X fiber support on two SFP slots and fiber redundant function. Figure 2-2 shows the upper panel of the Industrial Gigabit Media Converter.

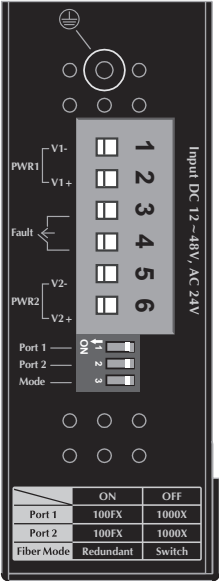


Figure 2-2: Industrial Gigabit Media Converter Upper Panel

The 3 DIP switch settings and descriptions:




	ON	OFF (Default)
Port 1 (DIP 1)	100FX	1000X
Port 2 (DIP 2)	100FX	1000X
Fiber Mode (DIP 3)	Fiber Redundant	Switch

The fiber redundancy function explains in chapter 2.1.7 Redundancy Overview.

2.1.4 Wiring the Power Inputs

The 6-contact terminal block connector on the top panel of Industrial Gigabit Media Converter is used for two DC redundant power inputs. Please follow the steps below to insert the power wire.


Insert positive / negative DC power wires into contacts 1 and 2 for POWER 1, or 5 and 6 for POWER 2.

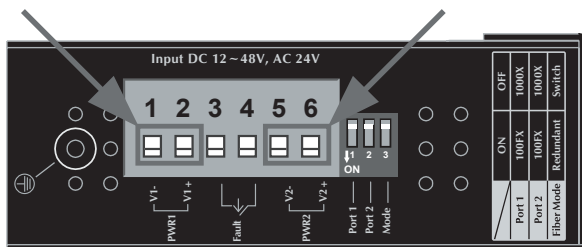

V1- V1+

V2- V2+

Tighten the wire-clamp screws for preventing the wires from loosening.

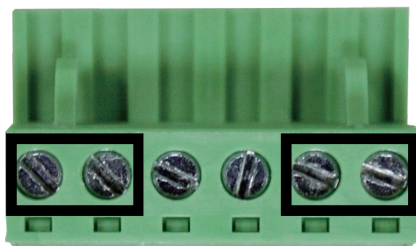

1 2 3 4 5 6
Power 1 Fault Power 2
- + - +




Note

The wire gauge for the terminal block should be in the range between 12 and 24 AWG.

2.1.5 Wiring the Fault Alarm Contact

The fault alarm contacts are in the middle of the terminal block connector as the picture shows below. Inserting the wires, the Industrial Gigabit Media Converter will detect the fault status of the power failure and then forms an open circuit. The following illustration shows an application example for wiring the fault alarm contacts.

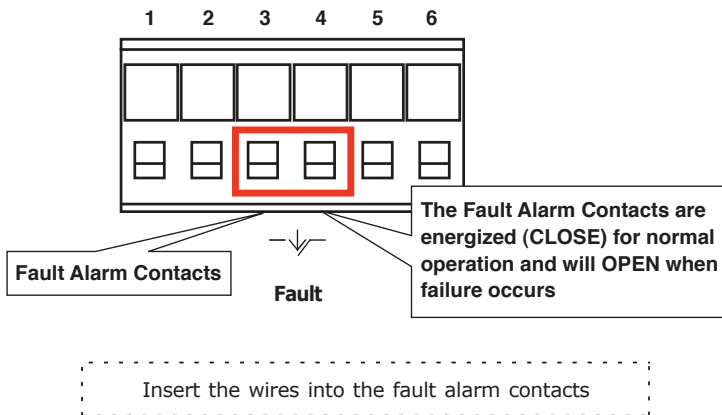

Note

The wire gauge for the terminal block should be in the range between 12 and 24 AWG.

2.1.6 Cabling

10/100/1000Base-T and 100Base-FX / 1000Base-SX/LX

The 10/100/1000Base-T port comes with Auto-Negotiation capability. It automatically supports 1000Base-T, 100Base-TX and 10Base-T networks. Users only need to plug a working network device into the 10/100/1000Base-T port, and then turn on the Industrial Gigabit Media Converter. The port will automatically runs in 10Mbps, 20Mbps, 100Mbps or 200Mbps and 1000Mbps or 2000Mbps after the negotiation with the connected device.

The Industrial Gigabit Media Converter has two SFP interfaces that supports 100/1000 dual speed mode (Optional Multi-mode / Single-mode 100Base-FX / 1000Base-SX/LX SFP module) through DIP switch setting.

Cabling

The 10/100/1000Base-T port uses RJ-45 socket -- similar to phone jack -- for connection of unshielded twisted-pair cable (UTP). The IEEE 802.3 / 802.3u / 802.3ab Fast / Gigabit Ethernet standard requires Category 5 UTP for 100Mbps 100Base-TX. 10Base-T networks can use Cat.3, 4, 5 or 1000Base-T uses 5/5e/6 UTP (see table below). Maximum distance is 100 meters (328 feet). The 100Base-FX / 1000Base-SX/LX SFP slot is used as LC connector with optional SFP module. Please see table below and know more about the cable specifications.

Port Type	Cable Type	Connector
10Base-T	Cat 3, 4, 5, 2-pair	RJ-45
100Base-TX	Cat.5 UTP, 2-pair	RJ-45
1000Base-T	Cat.5/5e/6 UTP, 4-pair	RJ-45
100Base-FX	50 / 125µm or 62.5 / 125µm multi-mode 9 / 125µm single-mode	LC (Multi / Single mode)
1000Base-SX/LX	50 / 125µm or 62.5 / 125µm multi-mode 9 / 125µm single-mode	LC (Multi / Single mode)

Any Ethernet devices like hubs/ PCs can be connected to the Industrial Gigabit Media Converter by using straight-through wires. The 10/100/1000Mbps port is auto-MDI/MDI-X and can be used on straight-through or crossover cable.

2.1.6.1 Installing the SFP Transceiver

The sections describe how to insert an SFP transceiver into an SFP slot.

The SFP transceivers are hot-pluggable and hot-swappable. You can plug in and out the transceiver to/from any SFP port without having to power down the Industrial Gigabit Media Converter as Figure 2-3 shows.

MGB / MFB Series
Transceiver



Figure 2-3: Plug in the SFP Transceiver

Approved PLANET SFP Transceivers

PLANET Industrial Gigabit Media Converter supports 100/1000 dual mode with both Single mode and Multi-mode SFP transceivers. The following list of approved PLANET SFP transceivers is correct at the time of publication:

Gigabit SFP Transceiver Modules

MGB-GT	SFP-Port 1000Base-T Module - 100m
MGB-SX	SFP-Port 1000Base-SX mini-GBIC module - 550m
MGB-LX	SFP-Port 1000Base-LX mini-GBIC module - 10km
MGB-L30	SFP-Port 1000Base-LX mini-GBIC module - 30km
MGB-L50	SFP-Port 1000Base-LX mini-GBIC module - 50km
MGB-L70	SFP-Port 1000Base-LX mini-GBIC module - 70km
MGB-L120	SFP-Port 1000Base-LX mini-GBIC module - 120km
MGB-LA10	SFP-Port 1000Base-LX (WDM, TX:1310nm) mini-GBIC module - 10km
MGB-LB10	SFP-Port 1000Base-LX (WDM, TX:1550nm) mini-GBIC module - 10km
MGB-LA20	SFP-Port 1000Base-LX (WDM, TX:1310nm) mini-GBIC module - 20km
MGB-LB20	SFP-Port 1000Base-LX (WDM, TX:1550nm) mini-GBIC module - 20km
MGB-LA40	SFP-Port 1000Base-LX (WDM, TX:1310nm) mini-GBIC module - 40km

MGB-LB40	SFP-Port 1000Base-LX (WDM, TX:1550nm) mini-GBIC module-40km
MGB-TSX	SFP-Port 1000Base-SX mini-GBIC module - 550m (-40~75°C)
MGB-TLX	SFP-Port 1000Base-LX mini-GBIC module - 10km (-40~75°C)
MGB-TL30	SFP-Port 1000Base-LX mini-GBIC module - 30km (-40~75°C)
MGB-TL70	SFP-Port 1000Base-LX mini-GBIC module - 70km (-40~75°C)

Fast Ethernet SFP Transceiver Modules

MFB-FX	SFP-Port 100Base-FX Transceiver (1310nm) - 2km
MFB-F20	SFP-Port 100Base-FX Transceiver (1310nm) - 20km
MFB-F40	SFP-Port 100Base-FX Transceiver (1310nm) - 40km
MFB-F60	SFP-Port 100Base-FX Transceiver (1310nm) - 60km
MFB-FA20	SFP-Port 100Base-BX Transceiver (WDM, TX:1310nm) - 20km
MFB-FB20	SFP-Port 100Base-BX Transceiver (WDM, TX:1550nm) - 20km
MFB-TFX	SFP-Port 100Base-FX Transceiver (1310nm) - 2km (-40~75°C)
MFB-TF20	SFP-Port 100Base-FX Transceiver (1310nm) - 20km (-40~75°C)




Note

It is recommended to use PLANET SFPs on the Industrial Gigabit Media Converter. If you insert an SFP transceiver that is not supported, the Industrial Gigabit Media Converter will not recognize it.

1000Base-SX/LX:

Before connecting the other switches, workstation or Media Converter, please do the following:

1. Set the DIP Switch of SFP Port 1 or Port 2 to the "OFF" position with fiber speed 1000Base-X.

	ON	OFF
Port 1 (DIP 1)	100FX	1000X 
Port 2 (DIP 2)	100FX	1000X

2. Make sure both sides of the SFP transceiver are with the same media type; for example, 1000Base-SX to 1000Base-SX, 1000Base-LX to 1000Base-LX.
3. Check whether the fiber-optic cable type matches the SFP transceiver model.
 - To connect to 1000Base-SX SFP transceiver, use the Multi-mode fiber cable with one side being the male duplex LC connector type.
 - To connect to 1000Base-LX SFP transceiver, use the Single-mode fiber cable with one side being the male duplex LC connector type.


Connect the fiber cable

1. Attach the duplex LC connector on the network cable to the SFP transceiver.
2. Connect the other end of the cable to a device, switches with SFP installed, to fiber NIC on a workstation or a Media Converter.
3. Check the LNK/ACT LED of the SFP slot on the front of the Industrial Gigabit Media Converter. Make sure that the SFP transceiver is operating correctly.

100Base-FX:

Before connecting the other switches, workstation or Media Converter, please do the following:

1. Set the DIP Switch of SFP Port 1 or Port 2 to the "ON" position with fiber speed "100FX".

	ON	OFF
Port 1 (DIP 1)	100FX 	1000X
Port 2 (DIP 2)	100FX	1000X

2. Make sure both sides of the SFP transceiver are with the same media type or WDM pair; for example, 100Base-FX to 100Base-FX, 100Base-BX20-U to 100Base-BX20-D.
3. Check the fiber-optic cable type match the SFP transceiver model.
 - To connect to MFB-FX SFP transceiver, use the multi-mode fiber cable with one side being the male duplex LC connector type.
 - To connect to MFB-F20/F40/F60/FA20/FB20 SFP transceiver, use the single-mode fiber cable with one side being the male duplex LC connector type.

Connect the fiber cable

1. Attach the duplex LC connector on the network cable to the SFP transceiver.
2. Connect the other end of the cable to a device, switches with SFP installed, to fiber NIC on a workstation or a Media Converter.
3. Check the LNK/ACT LED of the SFP slot of the switch / converter. Make sure that the SFP transceiver is operating correctly.

2.1.6.2 Remove the Transceiver Module

1. Make sure there is no network activity by consulting or checking with the network administrator. Or through the management interface of the switch/converter (if available) to disable the port in advance.
2. Remove the Fiber Optic Cable gently.
3. Turn the lever of the MGB/MFB module to a horizontal position.
4. Pull out the module gently through the lever.



Figure 2-4: Pulling Out from the Transceiver



Note

Never pull out the module without pulling the lever or the push bolts on the module. Directly pulling out the module with violence could damage the module and SFP module slot of the Industrial Gigabit Media Converter.

2.1.7 Redundancy Overview

The Industrial Gigabit Media Converter provides rapid fiber redundancy of link for highly critical Ethernet applications. The redundant-mode supports auto-recover function. If the destination port of a packet is link down, it forwards the packet to the other port of the backup pair. The following figure shows the redundant function.

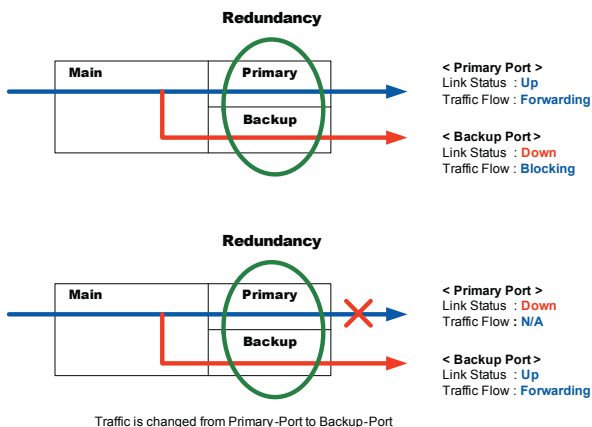


Figure 2-5: Redundancy Behavior Topology

- Link status auto detect and redundant on Dual ports with same connector type.
- Only Primary-Port is active at a time, the Backup-Port is blocked.
- When Primary-Port link failure occurs, the traffic will swap to Backup-Port automatically.
- Once the Primary-Port status is back to link up, the traffic will swap from Backup-Port to Primary-Port.

2.2 Mounting Installation

This section describes how to install the Industrial Gigabit Media Converter and makes connections to it. Please read the following topics and perform the procedures in the order being presented.



Note


In the installation steps below, this Manual uses IGS-801 (PLANET 8 Port Industrial Gigabit Switch) as the example. However, the steps for PLANET Industrial Switch and Industrial Media Converter are similar.

2.2.1 Install DIN-Rail Mounting

The DIN-Rail is screwed on the Industrial Gigabit Media Converter when out of factory. When replacing the wall mount application with DIN-Rail application on Industrial Gigabit Media Converter is needed, please refer to following figures to screw the DIN-Rail on the Industrial Gigabit Media Converter. To hang the Industrial Gigabit Media Converter, follow the following steps:



Step 1: Screw the DIN-Rail on the Industrial Gigabit Media Converter.

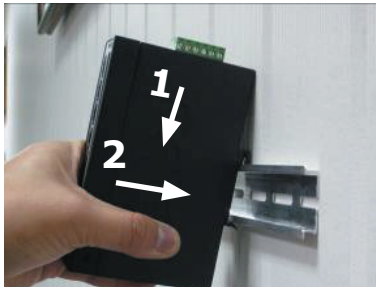


Step 2: Lightly insert the DIN-Rail into the track.



Step 3: Make sure the DIN-Rail is tightly secured on the track.

Step 4: Please refer to the following procedures to remove the Industrial Gigabit Media Converter from the track.

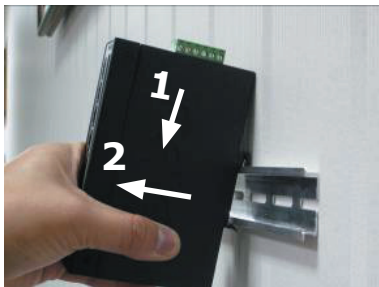

Step 5: Lightly pull out the bottom of the DIN-Rail from the track to remove.

2.2.2 Wall Mount Plate Mounting

To install the Industrial Gigabit Media Converter on the wall, please follow the instructions described below.

Step 1: Remove the DIN-Rail from the Industrial Gigabit Media Converter; loose the screws to remove the DIN-Rail.

Step 2: Place the wall mount plate on the rear panel of the Industrial Gigabit Media Converter.



Step 3: Use the screws to screw the wall mount plate on the Industrial Gigabit Media Converter.


Step 4: Use the hook holes at the corners of the wall mount plate to hang the Industrial Gigabit Media Converter on the wall.

Step 5: To remove the wall mount plate, reverse steps above.


3. Applications

In this paragraph, we will describe how to install the Industrial Gigabit Media Converter.

Transportation Networking

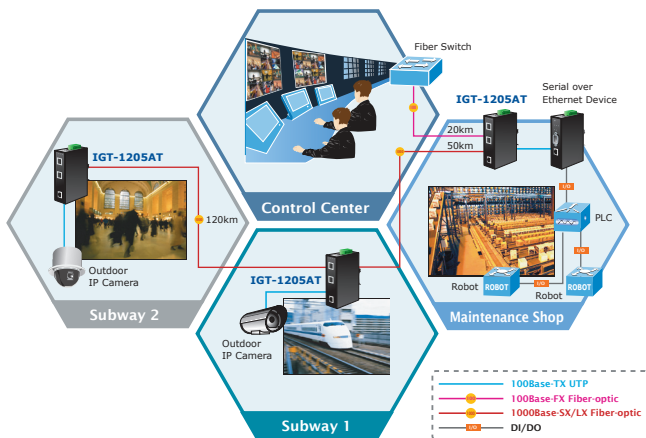

Industrial Operating Environment

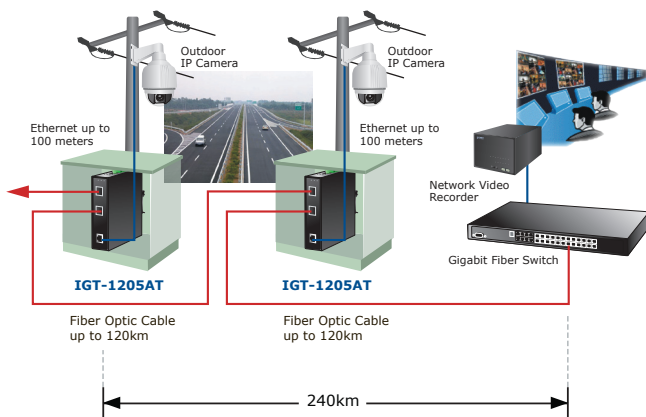

Installation Steps

- Step 1:** Unpack the Industrial Gigabit Media Converter.
- Step 2:** Check whether the DIN-Rail is screwed on the Industrial Gigabit Media Converter. (Please refer to DIN-Rail Mounting section for DIN-Rail installation if the DIN-Rail is not screwed on the Industrial Gigabit Media Converter). If you want to wall-mount the Industrial Gigabit Media Converter, then please refer to the Wall Mount Plate Mounting section for wall mount plate installation.
- Step 3:** To hang the Industrial Gigabit Media Converter on the DIN-Rail track or wall, please refer to the Mounting Installation section.
- Step 4:** Power on the Industrial Gigabit Media Converter. (Please refer to the Wiring of the Power Inputs section for power input) The power LED on the Industrial Gigabit Media Converter will light up. Please refer to the LED Indicators section for the functions of LED lights.
- Step 5:** Prepare the twisted-pair, straight through Category 5 cable for Ethernet connection.
- Step 6:** Insert one side of category 5 cable into the Industrial Gigabit Media Converter Ethernet port (RJ-45 port) while the other side of category 5 cable into the network devices' Ethernet port (RJ-45 port), ex: switch, PC or server. The UTP port (RJ-45) LED on the Industrial Gigabit Media Converter will light up when the cable is connected with the network device. Please refer to the LED Indicators section for the functions of LED lights.
- Step 7:** When all connections are all set and LED lights all show normally, the installation is complete.



Note

Be sure the connected network devices support MDI/MDI-X. If it does not support, then use the crossover category 5 cable.

4. Troubleshooting

This chapter contains information to help you solve issues. If the Industrial Gigabit Media Converter is not functioning properly, make sure the Industrial Gigabit Media Converter is set up according to instructions in this manual.

The per port LED is not lit

Solution:

Check the cable connection of the Industrial Gigabit Media Converter.

Performance is bad

Solution:

Check the speed duplex mode of the partner device. The Industrial Gigabit Media Converter is run at Auto-negotiation mode and if the partner is set to half duplex, then the performance will be poor.

Per port LED is lit, but the traffic is irregular

Solution:

Check that the attached device is not set to dedicate full duplex. Some devices use a physical or software switch to change duplex modes. Auto-negotiation may not recognize this type of full-duplex setting.

Why the Industrial Gigabit Media Converter doesn't connect to the network

Solution:

Check per port LED on the Industrial Gigabit Media Converter. Make sure the cable is installed properly. Make sure the cable is the right type. Turn off the power. After a while, turn on power again.

Can I install MGB-SX or other non wide temperature SFP module into SFP slot of Industrial Gigabit Media Converter?

Solution:

Yes, you can. However, the MGB-SX and the other non wide temperature SFP module cannot operate under -40 to 75 degrees C.

5. Cable Connection Parameters

The wiring details are as below:

100FX Fiber Optical Cables:

Standard	Fiber Type	Cable Specification
100Base-FX (1300nm)	Multi-mode	50/125µm or 62.5/125µm
100Base-FX (1310nm)	Multi-mode Single-mode	50/125µm or 62.5/125µm 9/125µm
100Base-BX-U (TX :1310/RX :1550) 100Base-BX-D (TX :1550/RX :1310)	Single-mode	9/125µm

1000X Fiber Optical Cables:

Standard	Fiber Type	Cable Specification
1000Base-SX (850nm)	Multi-mode	50/125µm or 62.5/125µm
1000Base-LX (1300nm)	Multi-mode Single-mode	50/125µm or 62.5/125µm 9/125µm

Wiring Distances:

Standard	Fiber	Diameter (micron)	Modal Bandwidth (MHz * km)	Max. Distance (meters)
1000Base- SX	MM	62.5	100	220
		62.5	200	275
		50	400	500
		50	500	550
1000Base- LX	MM	62.5	5	550
		50	4	
		50	5	
	SM	9	N/A	5000*



Note

The Single-mode port (1000Base-LX port) of IGT-1205AT complies with LX 5 kilometers and provides additional margin allowing for a 10/20/30/40/50/70/120 kilometer Gigabit Ethernet link on single mode fiber.

APPENDIX A: Networking Connection

A.1 Converter's RJ-45 Pin Assignments


1000Mbps, 1000Base-T

Contact	MDI	MDI-X
1	BI_DA+	BI_DB+
2	BI_DA-	BI_DB-
3	BI_DB+	BI_DA+
4	BI_DC+	BI_DD+
5	BI_DC-	BI_DD-
6	BI_DB-	BI_DA-
7	BI_DD+	BI_DC+
8	BI_DD-	BI_DC-

10/100Mbps, 10/100Base-TX

RJ-45 Connector pin assignment		
Contact	MDI Media Dependant Interface	MDI-X Media Dependant Interface- Cross
1	Tx + (transmit)	Rx + (receive)
2	Tx - (transmit)	Rx - (receive)
3	Rx + (receive)	Tx + (transmit)
4, 5	Not used	
6	Rx - (receive)	Tx - (transmit)
7, 8	Not used	


A.2 RJ-45 Cable Pin Assignments

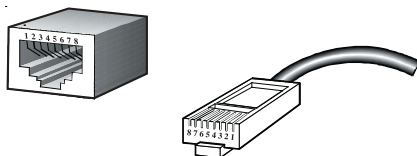

The standard RJ-45 receptacle/connector

There are 8 wires on a standard UTP/STP cable and each wire is color-coded. The following shows the pin allocation and color of straight cable and crossover cable connection:

Straight Cable




SIDE 1

1 = White/Orange
2 = Orange
3 = White/Green
4 = Blue
5 = White/Blue
6 = Green
7 = White/Brown
8 = Brown

SIDE 2

1 = White/Orange
2 = Orange
3 = White/Green
4 = Blue
5 = White/Blue
6 = Green
7 = White/Brown
8 = Brown

Cross Over Cable



SIDE 1

1 = White/Orange
2 = Orange
3 = White/Green
4 = Blue
5 = White/Blue
6 = Green
7 = White/Brown
8 = Brown

SIDE 2

1 = White/Green
2 = Green
3 = White/Orange
4 = Blue
5 = White/Blue
6 = Orange
7 = White/Brown
8 = Brown

Figure A-1: Straight-Through and Crossover Cable

Please make sure your connected cables are with the same pin assignment and color as the above picture before deploying the cables into your network.



EC Declaration of Conformity

For the following equipment:

*Type of Product : Industrial 10/100/1000Base-T to 2 100/1000Base-X SFP Media Converter (-40~75 degrees C)
*Model Number : IGT-1205AT
* Produced by:
Manufacturer Name : **Planet Technology Corp.**
Manufacturer Address : 10F., No.96, Minquan Rd., Xindian Dist.,
New Taipei City 231, Taiwan (R.O.C.)

is herewith confirmed to comply with the requirements set out in the Council Directive on the Approximation of the Laws of the Member States relating to Electromagnetic Compatibility Directive on (2004/108/EC).

For the evaluation regarding the EMC, the following standards were applied:

EN 55022	(Class A: 2010)
EN 61000-3-2	(2006 + A1:2009 + A2:2009)
EN 61000-3-3	(2008)
EN 55024	(2010)
EN 61000-4-2	(2009)
EN 61000-4-3	(2006 + A1:2008 + A2 :2010)
EN 61000-4-4	(2004 + A1:2010)
EN 61000-4-5	(2006)
EN 61000-4-6	(2009)
EN 61000-4-8	(2010)
EN 61000-4-11	(2004)

Responsible for marking this declaration if the:

Manufacturer Authorized representative established within the EU

Authorized representative established within the EU (if applicable):

Company Name: Planet Technology Corp.

Company Address: 10F., No.96, Minquan Rd., Xindian Dist., New Taipei City 231, Taiwan (R.O.C.)

Person responsible for making this declaration

Name, Surname Kent Kang

Position : Product Manager

Taiwan
Place

3. June, 2013
Date


Legal Signature

PLANET TECHNOLOGY CORPORATION

e-mail: sales@planet.com.tw http://www.planet.com.tw

10F., No.96, Minquan Rd., Xindian Dist., New Taipei City, Taiwan, R.O.C. Tel:886-2-2219-9518 Fax:886-2-2219-9528