

## 4-Port SIP VoIP Gateway (4 FXO)



### Cost-effective, High-performance VoIP Communication

To build high-performance VoIP communications at a low cost, PLANET now introduces the latest member of its gateway family, the VGW-400FO enterprise-class 4-port SIP VoIP Gateway. The VGW-400FO gateway provides added flexibility during migration to Unified Communications by supporting the traditional analog devices. For example, the remote workers can dial in through a Unified VoIP Communication System just like an extension call but no long-distance call charge would occur. The VGW-400FO also allows call to be transferred to anyone at any location within the voice system, which enables the enterprise to communicate more effectively and is helpful to streamline business processes.



### Standard Compliance

The VGW-400FO supports Session Initiation Protocol 2.0 (RFC 3261) for easy integration with general voice over IP system. The VGW-400FO is able to broadly interoperate with equipment provided by VoIP infrastructure providers, thus enabling them to provide their customers with better multi-media exchange services.

### Compliant with standard SIP RFC 3261



### Highlights

- Supports SIP 2.0 (RFC 3261)
- Supports IPv6 and IPv4 simultaneously
- Up to 4 SIP service domains and Caller ID
- Supports auto HTTP provision and fax feature
- Flexible Routes Plan, Dial Plan and SIP Trunk

### Internet Features

- IPv4 (RFC 791) and IPv6
- IPv6 auto configuration (RFC 4862)
- IPv6 only, IPv4 only or dual stack
- MAC clone setting
- Vendor Class ID
- DDNS (Planet DDNS, Easy DDNS, DynDNS)
- DNS client
- Firewall
- URL / IP / MAC / Port Filter
- Port forwarding (TCP, UDP or both)
- Bandwidth control (download and upload), maximum bandwidth priority setting

### SIP Applications

- SIP Session Timer (RFC 4028)
- SIP Session Refresher: UAC or UAS
- SIP Encryption
- Supports Outbound Proxy / STUN NAT Traversal
- Supports Primary and Backup SIP Server


### Call Features

- Supports peer to peer dialing
- 4-line FXO connects to PSTN line
- Caller ID recognition DTMF (before/after 1st ring) and FSK (before 1st ring), ETSI and Bellcore
- DTMF Caller ID start and stop BIT configurable
- T.38 fax volume configuration

**Enhanced, Full-Featured Business Gateway**


The VGW-400FO is a full-featured enhanced business SIP Gateway that addresses the communication needs of the enterprises. It provides the 4-line FXO gateway with SIP protocol IP device which allows connection with 4 analog PSTN telephone lines set to make or receive VoIP call over Internet or VPN network. This device is suitable for office PABX to enable to have VoIP call without changing cabling, dial plan and extension number.

The VGW-400FO supports all kinds of SIP-based gateway features and multiple contact filter functions, such as 4 SIP trunk accounts, both IPv6 and IPv4 protocols, flexible dial plan and route plan features, and switch analog and VoIP signal to help both protocols to communicate.

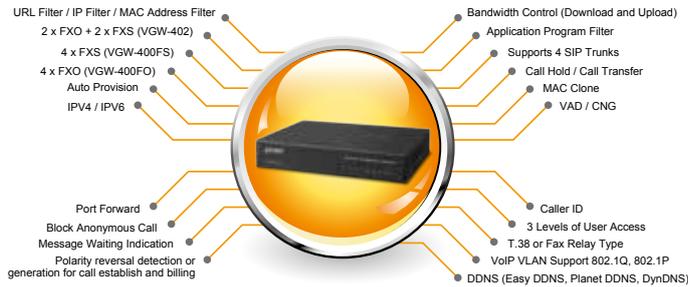

**Secure, High-Quality VoIP Communication**

It can effortlessly deliver secured toll voice quality by utilizing cutting-edge 802.1p QoS (Quality of Service), 802.1Q VLAN tagging, and IP TOS (Type of Service) technology. Using voice and data VLAN can easily separate the data and voice, thus maintaining the best quality.

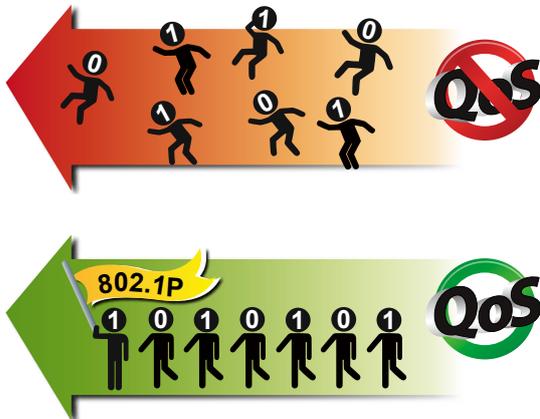

**Supporting Caller ID**

Both the FXS and FXO ports of the VGW-400 series support caller ID function, helping users identify calling number and verify number easily. It also helps to block anonymous call by filtering strange calls. The FXS port transmits Caller ID, while the FXO port receives Caller ID. The Caller ID interoperates with analog phones, public switched telephone networks (PSTN) and private branch exchanges (PBXs).




**FXO Line Configuration**

- Line ID / Line Phone number
- Polarity Reversal detection or generation for call establish and billing
- VoIP dial to FXO/PSTN Line: 1 stage dialing and 2 stage dialing
- Outgoing SIP Caller ID selection
- Caller ID detection mode by country selection

**Routing Plan**

- Prefix match and length
- Priority / Cyclic / Simultaneous Ring
- Programmable Hunting Cycle

## Applications

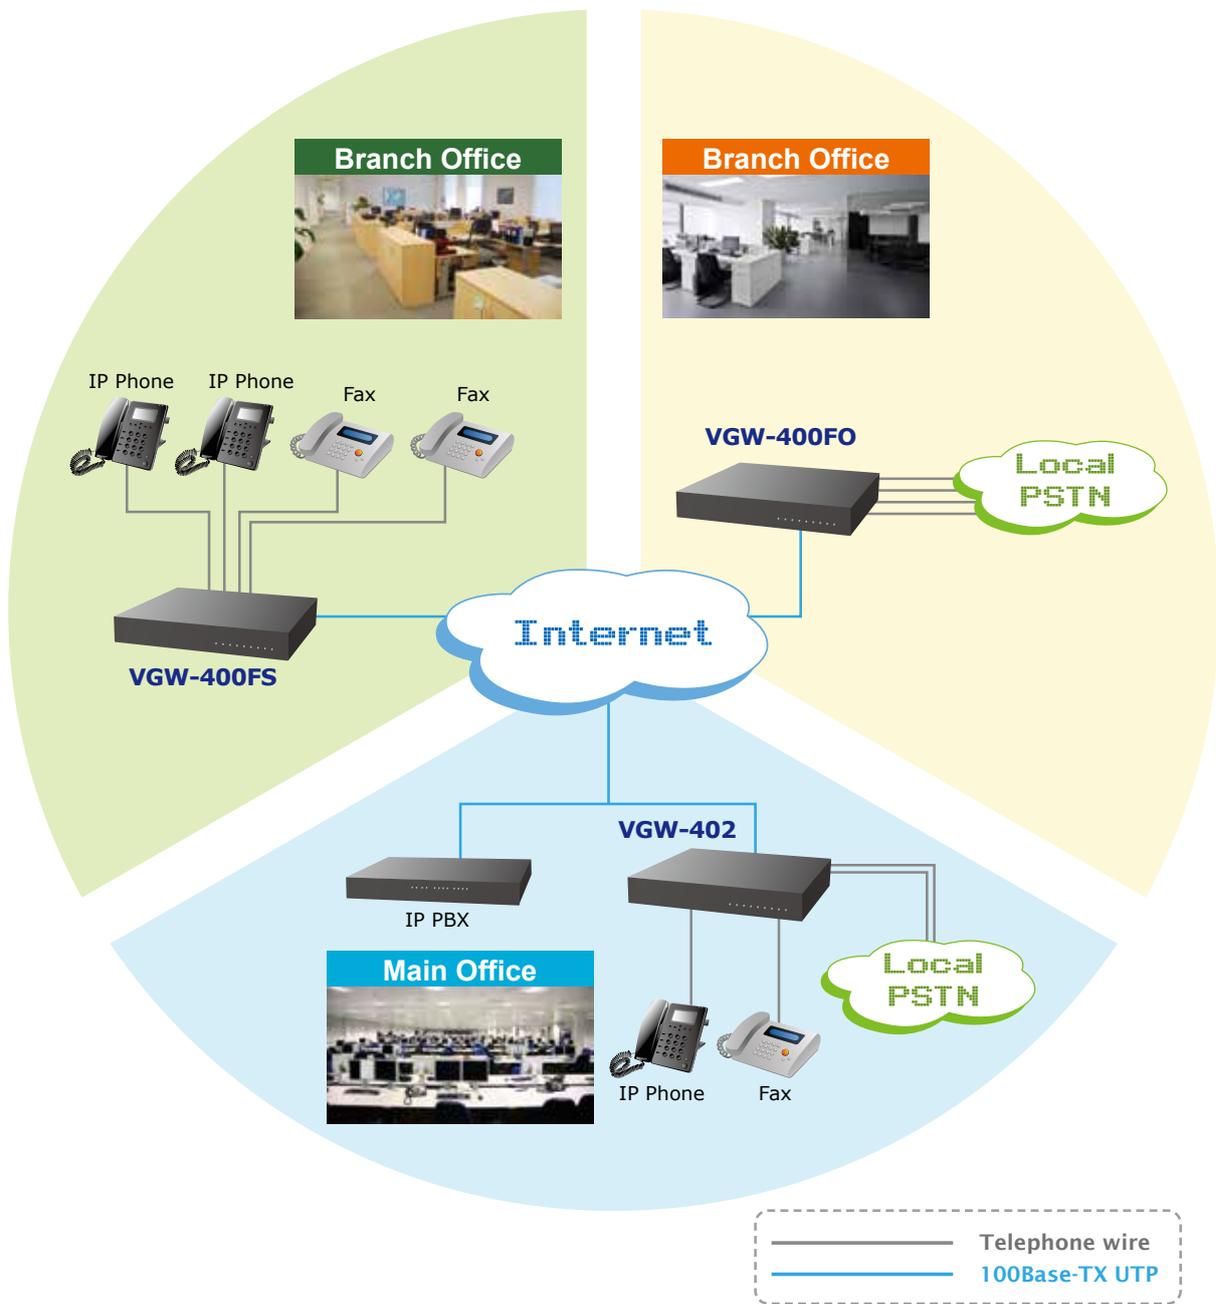

4-port SIP Gateway (VGW-400FO)

## Specifications

Product	VGW-400FO
Hardware	
WAN	1 x 10/100Mbps RJ-45 port
LAN	1 x 10/100Mbps RJ-45 port
Voice	4 x RJ-11 connection (4 x FXO)

Protocols and Standard

<p>Data Networking</p>	<p>IPv4 (RFC 791) and IPv6          IPv6 auto configuration (RFC 4862)          IPv6 only, IPv4 only or dual stack          MAC address (IEEE 802.3)          MAC clone setting          Vendor Class ID          IP / ICMP / ARP / RARP / SNTP          Static IP          DHCP Client (RFC 2131), WAN port          DHCP Server, LAN port          NAT Server (RFC 1631)          PPPoE Client / DNS Client / TFTP Client          DDNS (Planet DDNS, Easy DDNS, DynDNS)          Firewall          URL / IP / MAC / Port Filter          Application Program Filter          Port Forwarding (TCP, UDP or both)          Bandwidth control (download and upload), maximum bandwidth priority setting          UPnP Server at LAN port          Behind NAT, use DMZ for NAT traversal          SNTP with time zone and Daylight Saving          TCP/UDP (RFC 793/768), RTP/RTCP (RFC 1889/1890), IPV4 ICMP (RFC 792)          VoIP VLAN Support 802.1Q, 802.1P          VLAN ID Range: 2 to 4094          VLAN Priority: 0 to 7 (Highest Priority)          QoS: DiffServ (RFC 2475), TOS (RFC 791, 1394)</p>
<p>Voice Gateway</p>	<p>RFC3261 compliance          Supports up to 4 SIP Trunks to Register          SIP UDP Protocol          Supports SIP compact Form          Supports SIP HOLD Type: Send Only, 0.0.0.0 or inactive          SIP Session Timer (RFC 4028)          SIP Session Refresher: UAC or UAS          SIP Encryption          MD5 Digest Authentication (RFC 2069 / RFC 2617)          Reliability of provision response PRACK (RFC 3262)          Early/Delay Media support          Offer/Answer (RFC 3264)          Message Waiting Indication (RFC 3842)          Event Notification (RFC 3265)          REFER (RFC 3515)          Supports Outbound Proxy          Supports Primary and Backup SIP Server          Supports STUN NAT Traversal          Supports "rport" parameter (RFC 3581)          Configure SIP local Port          SIP QoS Type: DiffServe or QoS          Accept Proxy Only : Yes or No</p>
<p>Audio Codec</p>	<p>G.711 A-law/<math>\mu</math>-law, G.729A, G.723.1 (6.3K, 5.3K)          Select voice codec priority : Local or Remote          Voice Payload size (ms) configuration          Silence Suppression          VAD/CNG          LEC : Line Echo Canceller          Max Echo Tail Length (G.168): 32, 64 and 128ms          Packet Loss Compensation          Automatic Gain Control          In-band/out of band DTMF (RFC 4733, RFC 2833 / SIP INFO)          Adaptive/Configurable Jitter Buffer          G.168 Acoustic Echo Cancellation          Configure RTP basic Port          RTP QoS Type : DiffServ or TOS          Phone Book (50 records) for peer to peer calls          Dialing Plan with drop, replace, Insert dialing digits          Selects first digit and inter digit timeout duration (Sec)          Selectable Call Progress Tone          Supports Specified Line Calling</p>

Functions	
Call Functions	<ul style="list-style-type: none"> <li>Supports Peer to Peer dialing</li> <li>4-line FXO connects to PSTN Line</li> <li>Caller ID recognition DTMF (before/after 1st ring) and FSK (before 1st ring), ETSI and Bellcore</li> <li>DTMF Caller ID start and stop BIT configurable</li> <li>Current Drop Detection to release FXO port</li> <li>Disconnect tone recognition to release FXO port</li> <li>Tone Generation: Ring Back, Dial, Busy, call waiting, ROH, Warning, Holding, Stutter dial tone and disconnect tone</li> <li>Configure Tone Frequency, Cadence, Level and Cycle</li> <li>Select Tone specification by Country name List</li> <li>Global Country Based Tone Specification</li> <li>NAT Traversal support STUN, UPNP and Behind NAT</li> <li>Out-Band DTMF with RFC2833 and SIP Info</li> <li>RFC 2833 Payload type: 101 or 96</li> <li>DTMF send out ON and OFF Time configure</li> <li>DTMF incoming recognition Minimum ON and OFF time</li> <li>DTMF Relay Volume configuration</li> <li>T.38 FAX Volume configuration</li> <li>Flash Time transmit via SIP Info (Enable or Disable)</li> <li>Message Waiting Indication (Stutter Tone Notice)</li> <li>Blocks Anonymous Call</li> <li>Call Hold, Call Transfer</li> </ul>
FXO Line Configuration	<ul style="list-style-type: none"> <li>Activates or deactivates : Line ID, Line Phone number</li> <li>Polarity Reversal detection or generation for call establish and Billing</li> <li>HOT Line to desired phone number</li> <li>Plays voice file to incoming call</li> <li>Repeats playing voice file counts</li> <li>Self-recorded voice files to upload</li> <li>Generates FLASH TIME to PSTN network</li> <li>T.38 or FAX Relay Type</li> <li>Incoming and outgoing dB value configurable</li> <li>Dialing Answer Delay time to establish call path</li> <li>Answers PSTN incoming call after how many ring cycles</li> <li>Caller ID detection mode by Country selection</li> <li>VoIP dial to FXO/PSTN Line: 1 stage dialing and 2 stage dialing</li> <li>Outgoing SIP Caller ID Selection</li> <li>Supports 4 SIP Trunk</li> <li>Accepts desired SIP Proxy incoming calls Only</li> </ul>
Flexible Dial Plans	<ul style="list-style-type: none"> <li>Retrieves transfer call from 3rd party by dial code (default: *#)</li> <li>Inter digit time out setting</li> <li>First digit dial out delay time setting</li> <li>End of dial keypad number</li> <li>Dial Rule : Match dial prefix and maximum digits length (1-15)</li> <li>Phone Book can be exported or imported</li> </ul>
FXO Analog 2-wire interface	<ul style="list-style-type: none"> <li>Incoming Ring frequency recognition range: 10 to 70 Hz</li> <li>Incoming Ring ON time recognition range: 0 to 8000ms</li> <li>Incoming Ring OFF time recognition range: 0 to 8000ms</li> <li>Incoming Ring Level recognition range: 10 to 95Vrms</li> <li>Flash Time Detection: range from 80 to 800 ms</li> <li>Configure Ring Cadence, Frequency and Voltage</li> </ul>

Management	<p>Administrative Telnet CLI and HTTP, HTTPS          HTTP provision through MAC address          Multilingual Web User Interface          3 Levels of User Access Right with Password protection with different Web Language (Administrator, Supervisor and User)          HTTP/HTTPS Service Access limitation from WAN port          Configure Service ports at HTTP, HTTPS and telnet Services          Phone Debug Module: Device Control, Call Control, DB, Verbose          SIP Debug Module: Register, Call, SIP Message, Others          SNTP Debug Module          Device Debug Module          DSP Debug          Provides System Status Logs          Connect to external SYSLOG Server          Status display: Network, Line, SIP Trunk status          Diagnostics (debug through Syslog Event Notice)          Debug in real time by Telnet          Auto Provision via HTTP Server          SNMP v2 / Trap          Configuration Backup/Restore          Dual Firmware Image Backup          Reset to factory Default</p>
<b>Environments</b>	
Power Requirements	12V DC, 1.5A
Operating Temperature	0 ~ 45 degrees C
Operating Humidity	10~90% relative humidity, non-condensing
Weight	500 g
Dimensions (W x D x H)	175×32×126 mm
Emission	CE, FCC, RoHS
Connectors	<p>Two 10/100BASE-T RJ-45 Ethernet ports          Four RJ-11 ports          DC power jack</p>

## Ordering Information

VGW-400FO	4-Port SIP VoIP Gateway (4 FXO)
-----------	---------------------------------

## Related Products

VGW-402	4-Port SIP VoIP Gateway (2 FXS + 2 FXO)
VGW-400FS	4-Port SIP VoIP Gateway (4 FXS)
VIP-2020PT	Enterprise HD PoE IP Phone (2-line)
VIP-5060PT	Professional HD PoE IP Phone (6-line)
VIP-362WT	802.11n Wireless Desktop IP Phone
VIP-256PT	802.3af PoE SIP IP Phone
VIP-156	SIP Analog Telephone Adapter
VIP-156PE	802.3af PoE SIP Analog Telephone Adapter
VIP-157	1 FXS / 1 FXO SIP Analog Telephone Adapter
VIP-157S	2 FXS Analog Telephone Adapter
ICF-1700	Touch Screen Internet Multimedia Phone
IPX-330	Internet Telephony PBX System (30 user registrations)
IPX-2100	Internet Telephony PBX System (100 user registrations)
UMG-1000	Desktop Unified Office Gateway
UMG-2200	Unified Office Gateway (8-port FXO)
VIP-281 series	2-Port FXS H.323 / SIP / GSM VoIP Gateway
VIP-480 series	4-Port FXS H.323 / SIP VoIP Gateway
VIP-880 series	8-Port FXS H.323 / SIP VoIP Gateway
VIP-1680 Series	16-Port FXS H.323 / SIP VoIP Gateway
VIP-2480 Series	24-Port FXS H.323 / SIP VoIP Gateway

### PLANET Technology Corporation

11F., No.96, Minquan Rd., Xindian Dist., New Taipei City  
 231, Taiwan (R.O.C.)  
 Tel: 886-2-2219-9518 Fax: 886-2-2219-9528  
 Email: sales@planet.com.tw www.planet.com.tw



PLANET reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. Copyright © 2013 PLANET Technology Corp. All rights reserved.

C-VGW-400FO