

Product Specifications

Industrial EtherCAT Slave I/O Module with Isolated 16-ch Digital Output

IECS-1116-DO

Release 1.0

This document contains confidential proprietary information and is property of PLANET. The contents of this document should not be disclosed to unauthorized persons without the written consent of PLANET.

Change History:

Revision	Date	Author	Change List
Version 1.0	2019/04/29	Simon	Initial release

Author	Simon	Editor:	Mark
Reviewed by:	Reyo	Approved by:	Kent

1. PRODUCT DESCRIPTION



Powering the Digital Transformation with EtherCAT

PLANET IECS-1116-DO is an industrial EtherCAT slave I/O module equipped with the EtherCAT protocol for today's distributed industrial applications. The IECS-1116-DO provides high-density digital output channels and is protected with 3750 V DC isolation. Its compact size and DIN-rail mounting make installation in a cabinet easy. Pluggable terminal blocks and LED indicator help users to maintain and set up their system.



Flexible Installation

The IECS-1116-DO is an ideal high-speed distributed system solution which provides quick installation, real-time connection status monitoring, and wide-ranging power input and operating temperature to improve work efficiency, making them suitable for the harsh environment. Besides, the module comes with 2 10/100BASE-TX RJ45 ports. Through the EtherCAT technology, a network of up to 65,535 devices can be supported without the limitation of the type of topology -- line, bus, tree, star or any arrangement -- being used.

Synchronization

An EtherCAT slave is an electronic device that carries out cyclical sequences of calculations and/or data copying tasks at a certain interval (cycle). The EtherCAT slave working cycle (e.g. in the range of a few μ s up to several ms) can be derived from different sources. EtherCAT node can measure time difference between leaving and returning frame. With distributed clocks, EtherCAT can realize a precise synchronization time of $<1\mu$ s between each slave module.

Convenient and Reliable Power System

The IECS-1116-DO is equipped with one 3-pin DC power input connector with screws for power supply installation. With power magnetic protection design, it can avoid the device burnout due to wrong wiring. In addition, it also possesses an integrated power supply source with wide-ranging voltages (9 to 48V DC) for worldwide high availability applications.

Environmentally Hardened Design

With the IP30 metal industrial case, the IECS-1116-DO provides a high level of immunity against electromagnetic interference and heavy electrical surges which are usually found on plant floors or in curb-side traffic control cabinets without air conditioning. It features a ventilated construction in which a cooling fan is not necessary, thereby making its operation noiseless. Being able to operate under the temperature range from -40 to 75 degrees C, the IECS-1116-DO can be placed in almost any difficult environment.

2. PRODUCT FEATURES

- Built-in isolated 16 digital outputs
- 2 x RJ45 bus interface
- LED indicators for the input status
- Removable terminal block connector
- 9 ~ 48V DC wide input voltage range and high output current (700 mA/ch)
- Supports EtherCAT Distributed Clock (DC) mode and SyncManager mode
- EtherCAT conformance test tool verified

3. PRODUCT SPECIFICATIONS

3.1 Component Specifications

Controller	Microchip LAN9252
EEPROM	AT24C512C-SSHM-T


3.2 Functional Specifications

Product	IECS-1116-DO
Digital Output	
Channels	16
Output Type	Open collector (sink)
Load Voltage	3.5~50V
Max. Load Current	700 mA per channel
Photo Isolation	3750 VDC
Communication Interface	
Connector	2 RJ45 ports
Protocol	EtherCAT
Distance between Stations	Max. 100m (100BASE-TX)
Data Transfer Medium	Ethernet/EtherCAT cable (min. cat5), shielded
Power	
Input Voltage Range	9~48V DC
Power Consumption	4W max.
Mechanical	
Dimensions (W x D x H)	32 x 87 x 135 mm
Installation	DIN-rail and wall mounting
Case Material	IP30 metal
Environment	
Operating Temperature	-40~75°C
Storage Temperature	-40~75°C
Relative Humidity	5~95% (non-condensing)

3.3 Physical Specifications

Dimensions (W x D x H)	32 x 87 x 135 mm
Weight	390g (gross weight)

➤ **Front View**

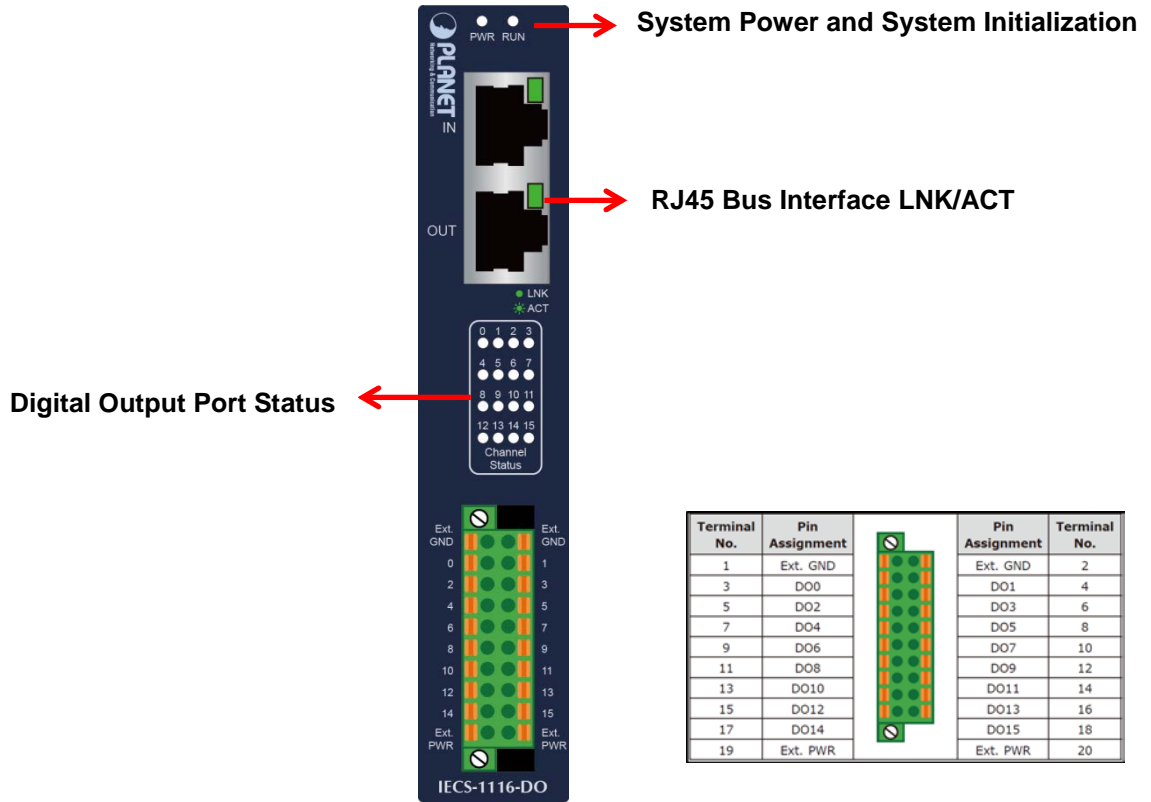

Terminal No.	Pin Assignment	Pin Assignment	Terminal No.
1	Ext. GND	Ext. GND	2
3	DO0	DO1	4
5	DO2	DO3	6
7	DO4	DO5	8
9	DO6	DO7	10
11	DO8	DO9	12
13	DO10	DO11	14
15	DO12	DO13	16
17	DO14	DO15	18
19	Ext. PWR	Ext. PWR	20

LED Status:

System

LED	Color	Function	
PWR	Green	Light	Power is activated.
		Off	Power is not activated.
RUN	Green	Light	The device is in the state of operation.
		Single Flash	The device is in the state of operation without risk.
		Blinking	The device is ready to be operated.
		Off	The device is in the sleep mode


Per 10/100TX RJ45 Port (Port Input/Port Output)

LED	Color	Function	
LNK/ACT	Green	Light	Indicating that the port is linked up.
		Blinking	Indicating that the module is actively sending or receiving data over that port.
		Off	Indicating that the port is linked down.


Per Digital Output LED

LED	Color	Function	
DO (0~15)	Green	Light	Digital output status is "On"
		Blinking	Indicating network packet delivery
		Off	Digital output status is "Off".

Top View

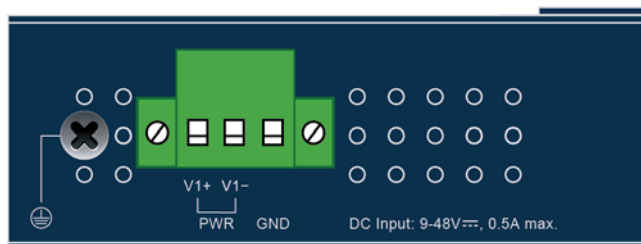

Three-view Diagram

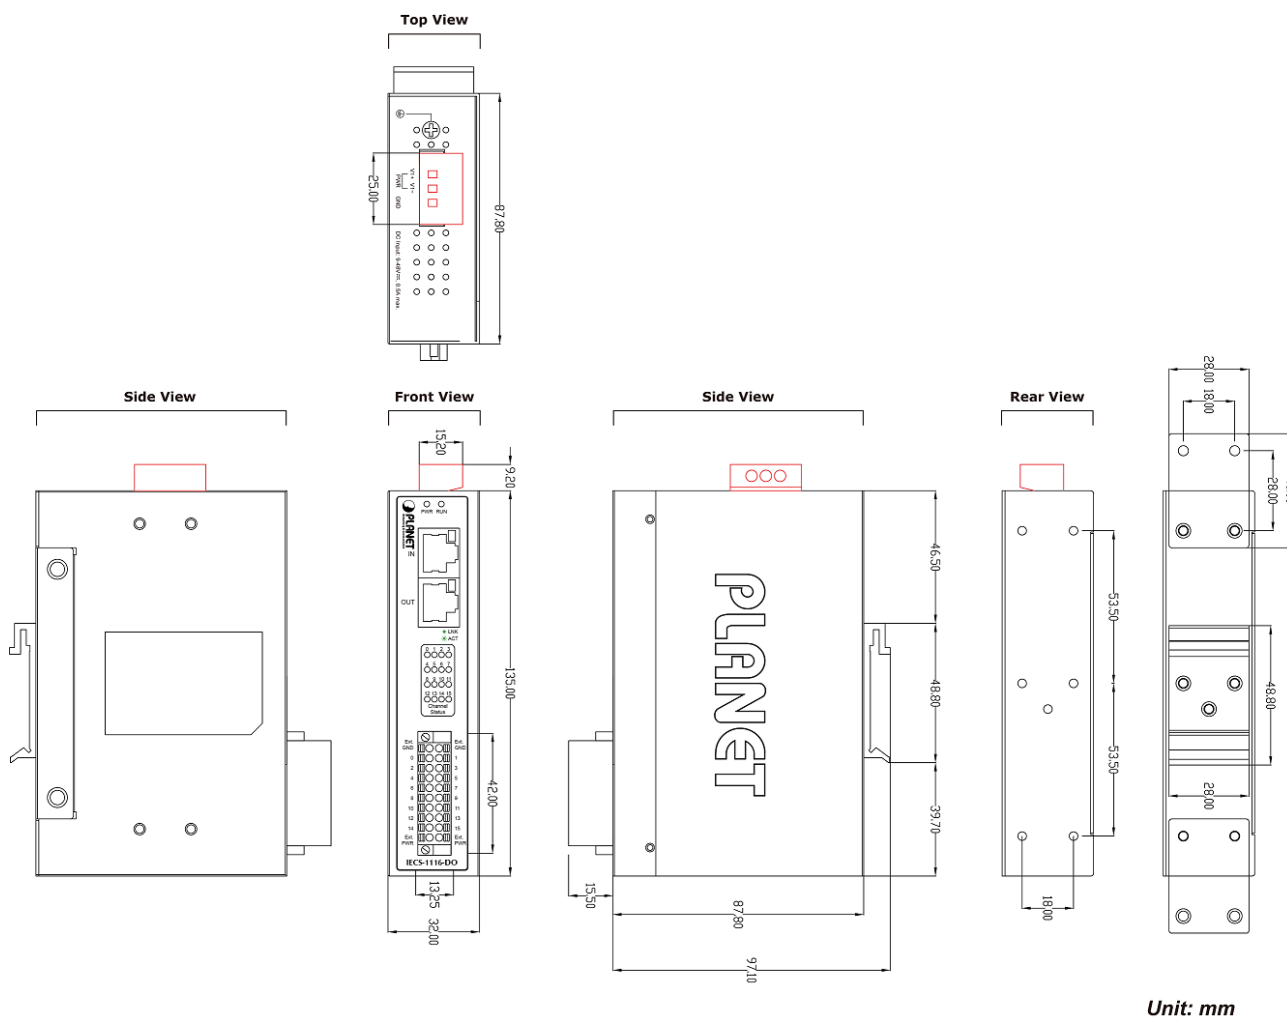

3.4 Environmental Specifications

Temperature

Cold Boot	-40 ~ 75 degrees C
Operating	-40 ~ 75 degrees C

Operating Humidity

Operating	5 ~ 95% (non-condensing)
Storage	5 ~ 95% (non-condensing)

3.5 Electrical Specification

Device Input Voltage	9-48V DC, 0.5A max.
-----------------------------	---------------------

3.6 Regulatory Compliance

CE, FCC, RoHS, WEEE

3.7 Reliability

MTBF> 50,000hrs @ 25 degrees C

3.8 Basic Packaging

- 1 x IECS-1116-DO Unit
- 1 x User Manual
- 1 x Wall-mount Kit

3.9 Package Information

Dimensions (W x D x H)	205 x 144 x 46 mm
Weight	490g
Carton Dimensions (W x D x H)	430 x 310 x 260 mm
Carton Weight	9.8kg
Carton Unit	20pcs in one carton