

Product Specifications

Industrial 2-channel Optical Fiber Bypass Switch

IFB-244 Series

Version 1.0

This document contains confidential proprietary information and is property of PLANET. The contents of this document should not be disclosed to unauthorized persons without the written consent of PLANET.

Change History:

Revision	Date	Author	Change List
Version 1.0	2019/6/11	Marc	Initial release

Author	Marc	Editor:	Mark
Reviewed by:	Kent	Approved by:	Kent

1. PRODUCT DESCRIPTION

To protect the critical fiber optical network from power system failure, PLANET IFB-244 Series is an ultra-fast auto-recovering solution to prevent and maintain fiber network communication during power loss.

The IFB-244 Series is an **industrial-grade optical fiber bypass switch** with built-in **4 duplex LC or SC** connectors featuring 2-channel duplex or 4-channel simplex fiber connection with optical bypass function. The optical fiber ports support **100Gbps/40Gbps/10Gbps/1Gbps/100Mbps** fiber connections. It automatically switches optic network traffic to prevent link failure during power loss. It also allows the local network switch to be replaced or removed without network downtime.

Optical Fiber Bypass Mechanism

The IFB-244 Series applies fiber-to-fiber technology to achieve ultra-low losses and ultra-fast switching time. Two of the fiber ports are used to connect to **two remote fiber switches** and the other two fiber ports are used to connect to the **local fiber switch**. The IFB-244 Series and the local fiber Ethernet switch are powered from the same power source.



When the system power is on, the IFB-244 Series operates in the **Norman mode** and forwards Ethernet packets between two remote fiber switches and the local fiber switch.

When the system power failure occurs, the IFB-244 Series operates in the **Bypass mode** that directly forwards Ethernet packet between two remote fiber switches and bypass the local fiber switch.

Once the system power is recovered to the IFB-244 Series and the local fiber switch, the network traffic is resuming forward between two remote fiber switches and local fiber switch.

Operation Mode	Power Source	Optical Traffic Route
Normal Mode	Power on	IFB-244 forwards packets between two remote network switches and the local switch
Bypass Mode	Power loss	IFB 244 directly forwards packets between two remote network switches and bypass the local switch

Optical Fiber Ethernet Connection with Optical Bypass Switch

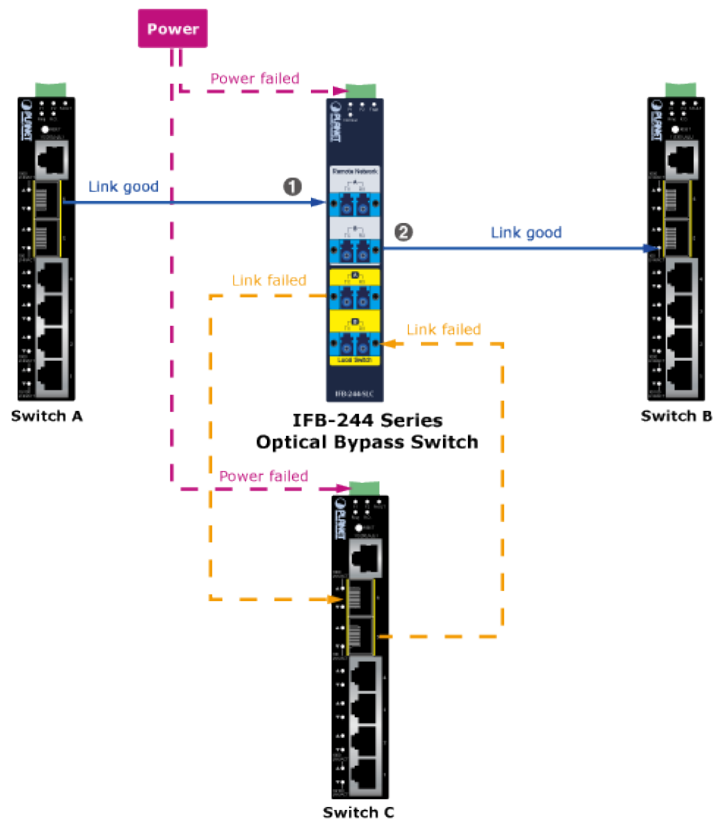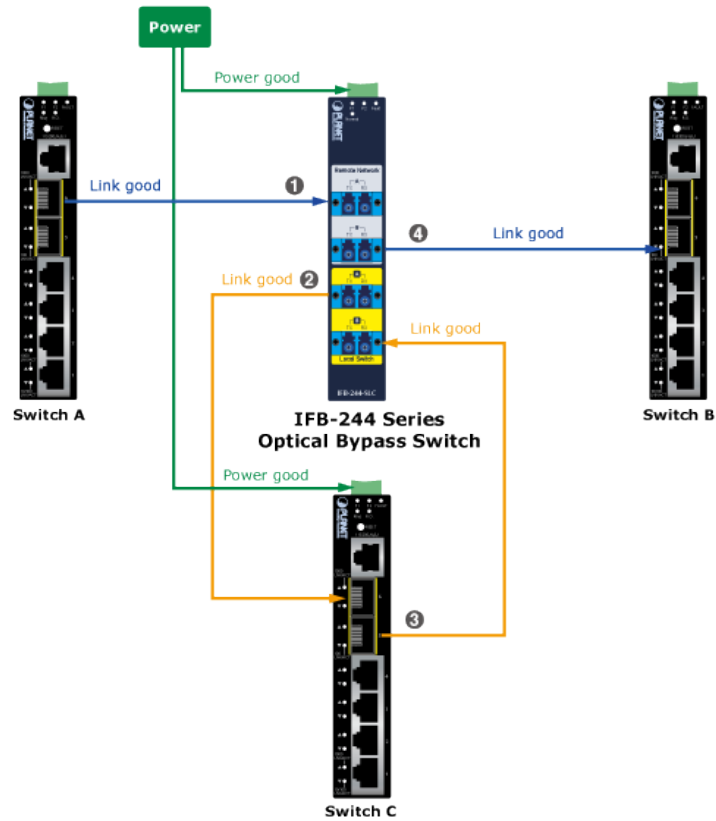

Once system power failure occurs, the IFB-244 series directly forwards Ethernet packet between two remote switches.

Confidential

Environmentally Hardened Design

The IFB-244 Series possesses an integrated power supply source with a wide range of voltages (**9 to 48V DC** or **24V AC**) for worldwide high availability applications requiring dual or backup power inputs. Being able to operate under wide temperature range from **-40 to 75 degrees C**, the IFB-244 Series can be placed in almost any difficult environment.

Robust Protection

The IFB-244 Series provides contact discharge of $\pm 6\text{KV DC}$ and air discharge of $\pm 8\text{KV DC}$ for Ethernet ESD protection. It also supports $\pm 6\text{KV}$ surge immunity to improve product stability and protects users' networks from devastating ESD attacks, making sure the flow of operation does not fluctuate.

Flexible and Easy Installation with Limited Space

The IFB-244 Series is specially designed to be installed in a narrow environment, such as wall enclosure. It can be installed by fixed wall mounting or DIN rail, thereby making its usability more flexibly and easily in any space-limited location.

**Din-rail mounting****Wall mounting****Wall mounting
(Space saving)**

Dual Power Input for High Availability Network System

The IFB-244 Series features a strong dual power input system with wide-ranging voltages incorporated into customer's automation network to enhance system reliability and uptime. In the example below, when power supply 1 fails to work, the hardware failover function will be activated automatically to keep powering the IFB-244 Series via power supply 2 without any break of operation.

Confidential

2. PRODUCT FEATURES

Physical Port

- 2-channel duplex or 4-channel simplex fiber connection with optical bypass function
- Supports 100Gbps/40Gbps/10Gbps/1Gbps and 100Mbps fiber connections
- Available in single mode or multimode
- Available in LC/SC connectors

Optical Fiber Bypass

- Bypass switch time <8ms
- Low return loss
- Throughput not affected and no extra delay
- Increased reliability on critical network links

Industrial Case and Installation

- IP30-rated metal housing
- Redundant dual 9~48V DC or 24V AC power inputs
- DIN-rail and wall-mount designs
- 48V~56V DC power with reverse polarity protection
- Connective removable terminal block
- Relay output for power failure warning
- Supports 6000 VDC Ethernet ESD protection
- -40 to 75 degrees C operating temperature
- Free fall, shock-proof and vibration-proof for industries
- Low power consumption with 0.54W

Confidential

3. PRODUCT SPECIFICATIONS

3.1 MAIN COMPONENTS

Bypass module	Confidential information	
---------------	--------------------------	--


3.2 FUNCTION SPECIFICATIONS

Model	IFB-244-SLC	IFB-244-SSC	IFB-244-MLC	IFB-244-MSC
Hardware Specifications				
Optic Interfaces	4 x Duplex LC	4 x Duplex SC	4 x Duplex LC	4 x Duplex SC
Optic Mode	Single Mode		Multimode	
Optic Wavelength	1310nm & 1550nm		850nm & 1300nm	
Operating Wavelength	1260~1620nm		850nm±40 / 1300nm±40	
Bypass Return Loss	>50dB		>35dB	
Bypass Insertion Loss	Type: 1.0dB Max: 1.5dB			
Bypass Switching Time	< 8ms			
Speed	100Gbps/40Gbps/10Gbps/1Gbps/100Mbps			
ESD Protection	Air 8kV, Contact 6kV			
Enclosure	IP30 metal case			
Installation	DIN-rail kit and wall-mount kit			
Connector	Removable 6-pin terminal block for power input Pin 1/2 for Power 1, Pin 3/4 for fault alarm, Pin 5/6 for Power 2			
Alarm	One relay output for power failure. Alarm relay current carry ability:1A@24V DC			
LED Indicator	System: Power 1 (green), Power 2 (green), Fault (red) Normal operation (green)			
Dimensions (W x D x H)	32 x 87 x 135 mm	50 x 87 x 135 mm	32 x 87 x 135 mm	50 x 87 x 135 mm
Weight	390g	485g	390g	485g
Power Requirements	Dual 9-48V DC with reverse polarity protection 24V AC			
Power Consumption	0.54 watts/1.84BTU			
Cabling	9/125µm		50/125µm	
Standards Conformance				
Regulatory Compliance	FCC Part 15 Class A CE			
Stability Testing	IEC60068-2-32(free fall) IEC60068-2-27(shock) IEC60068-2-6(vibration)			

Confidential

3.3 PHYSICAL SPECIFICATIONS:

Diagram

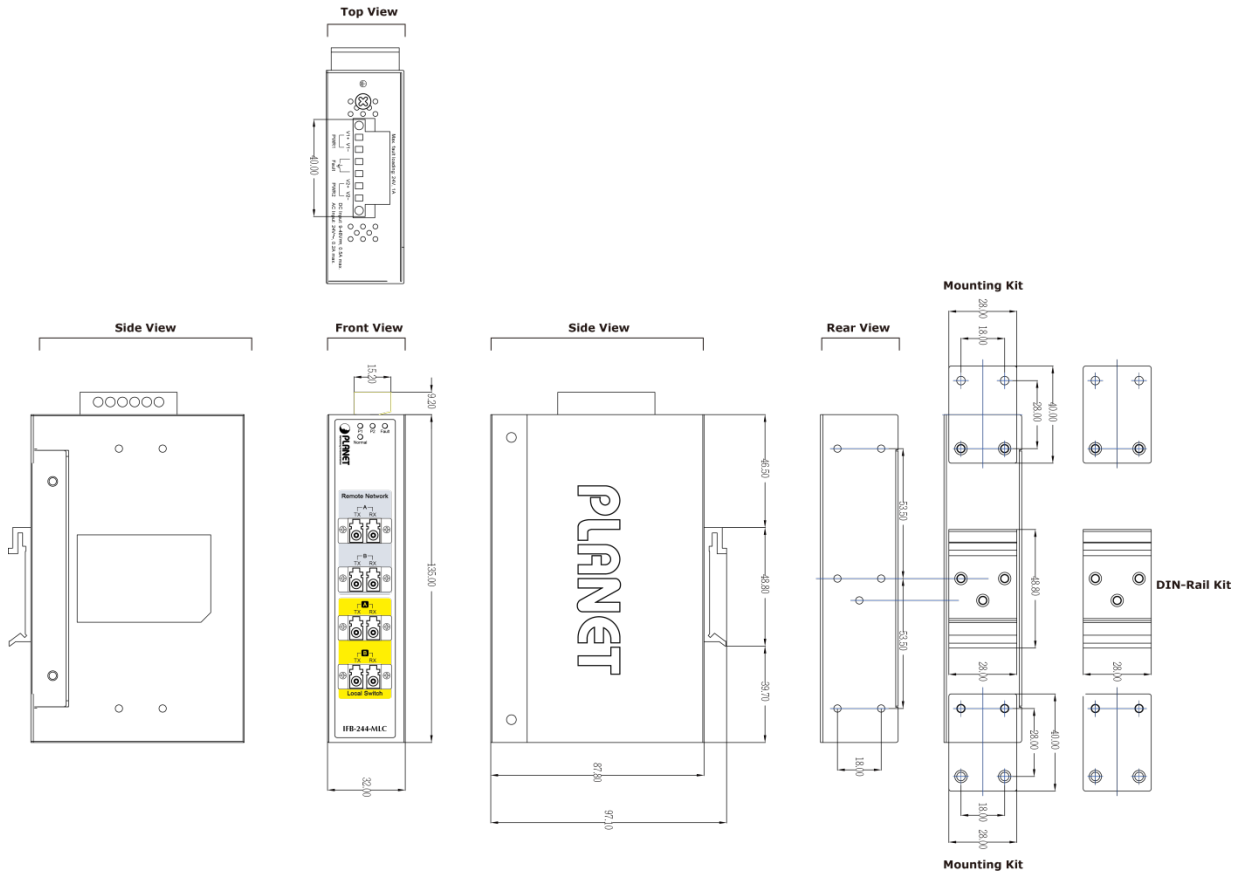


Unit: mm

IFB-244-SLC/IFB-244-MLC

Confidential

Diagram

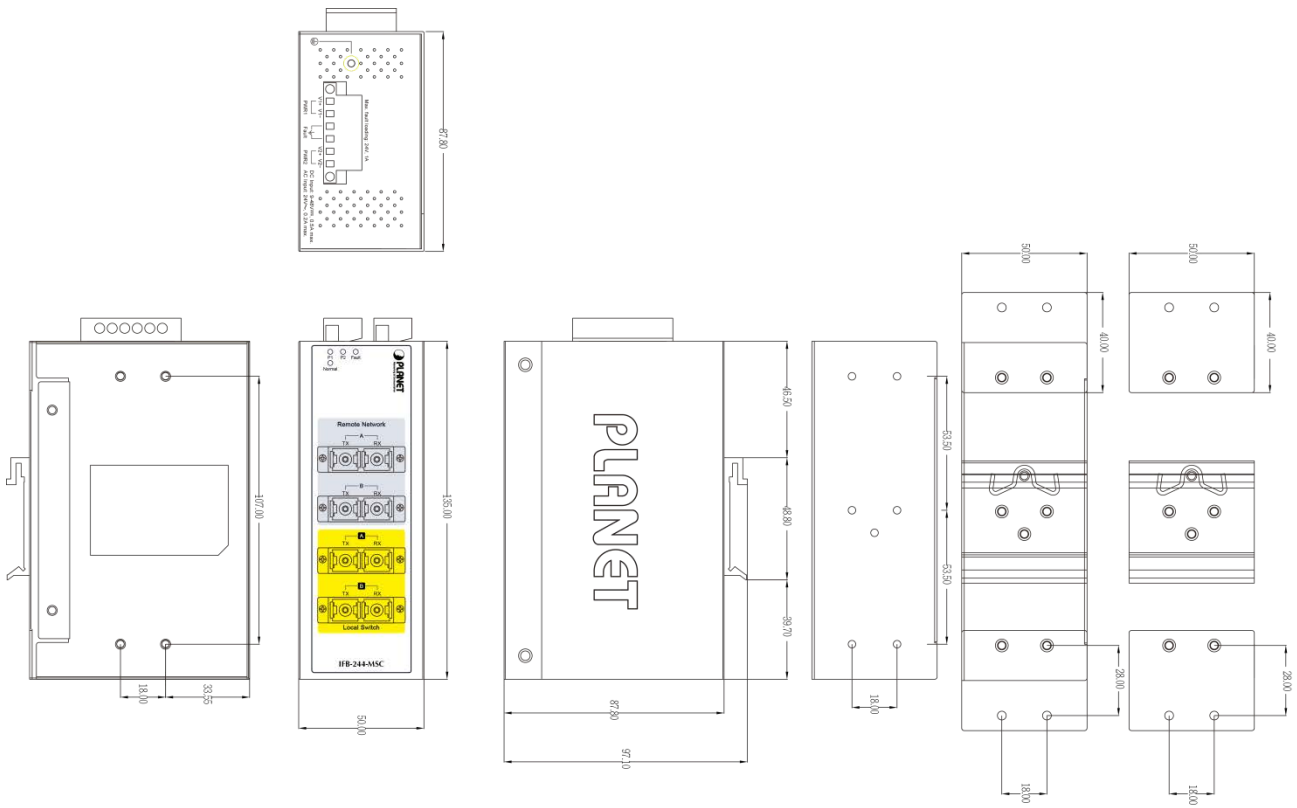


Unit: mm


IFB-244-SSC/IFB-244-MSD

Confidential

LED Definition:

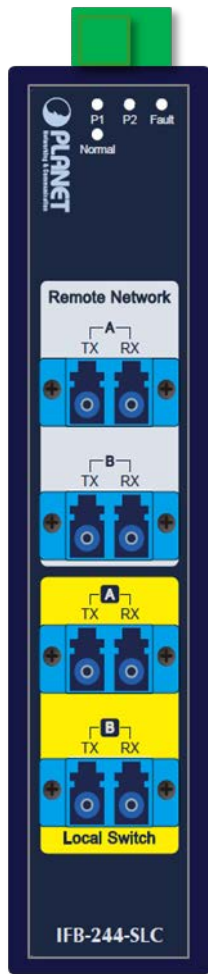

IFB-244-SLC/IFB-244-MLC

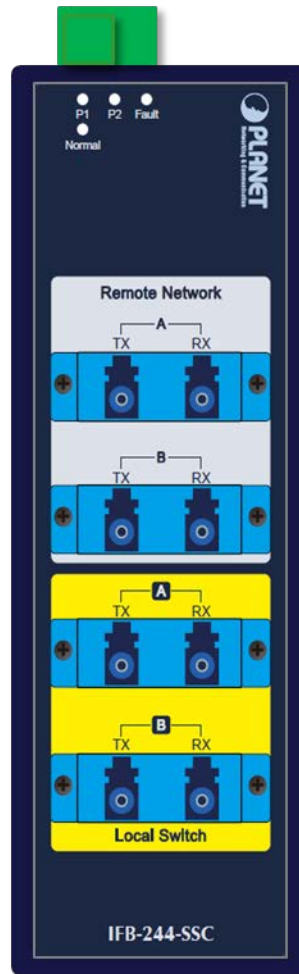

IFB-244-SSC/IFB-244-MSC

■ System


LED	Color	Function	
P1	Green	Lit:	Power 1 is active.
		Off:	Power 1 is inactive.
P2	Green	Lit:	Power 2 is active.
		Off:	Power 2 is inactive.
FAULT	Red	Lit:	Hardware indicates either Power 1 or Power 2 has no power.
		Off:	No failure

■ STATE


LED	Color	Function	
Normal	Green	Lights:	To indicate the Bypass Switch is operating in Normal mode with power input
		Off	To indicate the Bypass Switch is operating in Bypass mode with power failure

Confidential

Top view:

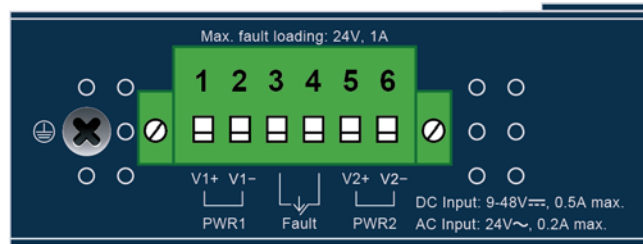

IFB-244-SLC/IFB-244-MLC upper panel

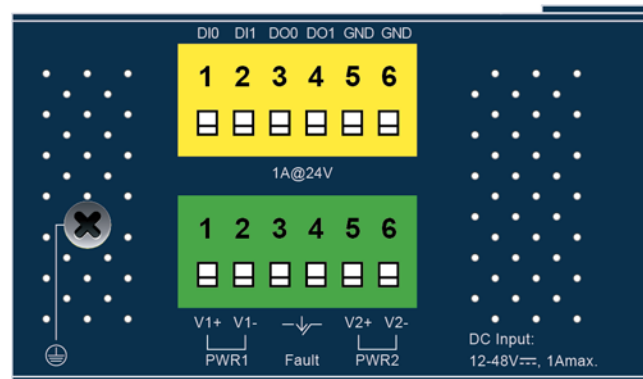

IFB-244-SSC/IFB-244-MSD upper panel

3.4 ENVIRONMENTAL SPECIFICATIONS

Operating:

Temperature: -40 ~75 degrees C

Relative Humidity: 5% ~ 95% (non-condensing)

Storage:

Temperature: -40 ~80 degrees C

Relative Humidity: 5% ~ 95% (non-condensing)

3.5 ELECTRICAL SPECIFICATIONS

Power Requirements: 9~56V DC or 24V AC power with reverse polarity protection

Power Consumption:

Condition Power Input	System ON	Full Loading
DC 9V	0.54W	0.54W
DC 24V	0.24W	0.24W
DC 48V	0.24W	0.24W
AC 24V	N/A	N/A

Confidential

3.6 REGULATORY COMPLIANCE

FCC Part 15 Class A, CE

3.7 RELIABILITY

MTBF > 100,000hrs @ 25 degrees C

3.8 BASIC PACKAGING

- The IFB-244 Series x 1
- User's Manual x 1
- DIN-rail Kit x 1
- Wall-mounting Kit x 1


3.9 PACKING INFORMATION

Item	MLC/SLC	MSC/SSC
Box Dimensions (W x D x H)	205 x 144 x 46 mm	202 x 140 x 94 mm
Weight	491g	673g
Carton Dimensions (W x D x H)	435 x 325 x 280 mm	600 x 239 x 332 mm
Carton Weight	10.6kg	9.7kg
Quantity	20pcs in one carton	12pcs in one carton


Confidential

4. Optical Fiber Connections

■ Connecting to the Remote Network with Duplex Fiber Cables

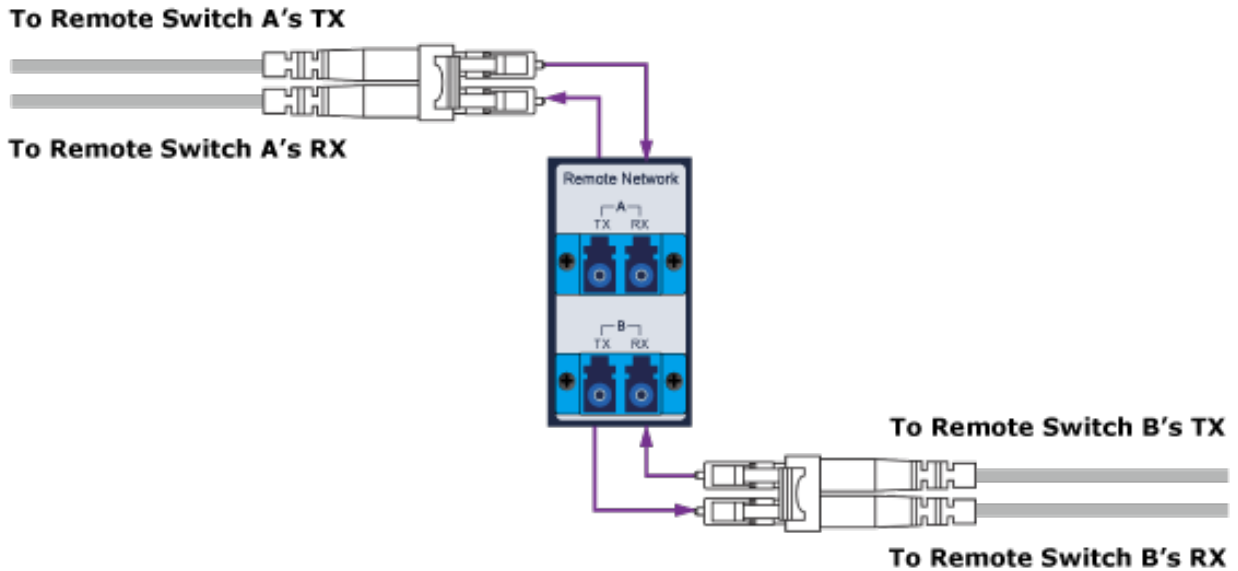


■ Connecting to the Local Switch

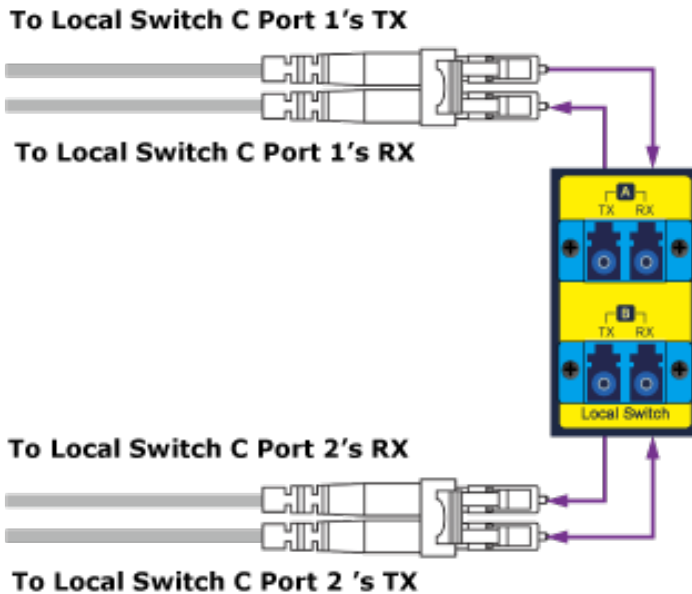

Confidential

■ **Connecting to the Remote Network with Simplex Fiber Cables (WDM/Bi-di)**

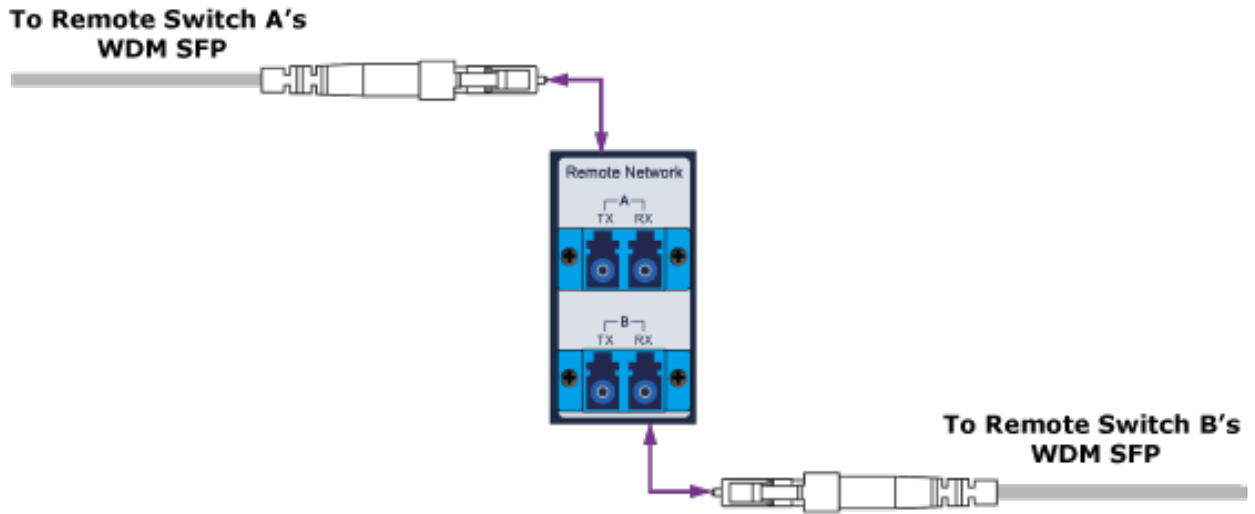

■ **Connecting to the Local Switch**

