


Command Guide



L2/L4 Multi-port Gigabit Managed Ethernet Switch

▶ **GS-4210 Series**

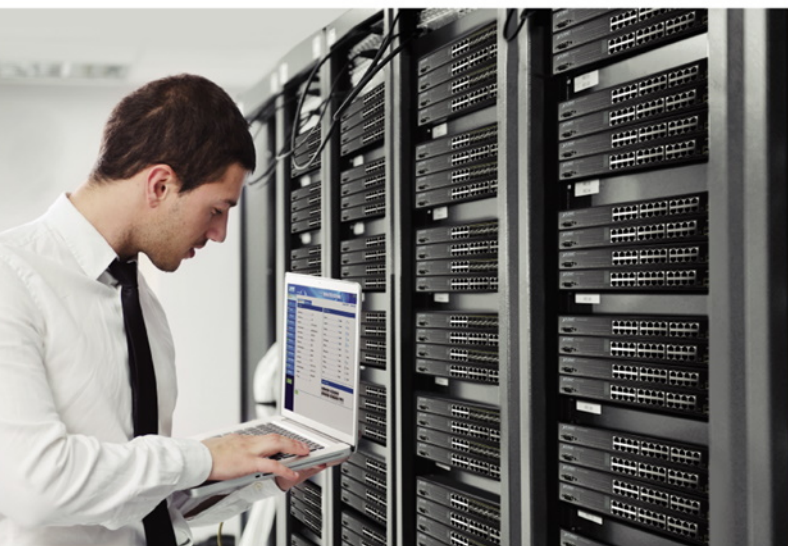

Contents

| | |
|---|-----------|
| Chapter 1 COMMAND LINE INTERFACE..... | 12 |
| 1.1 Accessing the CLI | 12 |
| 1.2 Command Line Modes..... | 12 |
| 1.3 Command Help..... | 13 |
| 1.4 Command Line Editing..... | 14 |
| 1.5 Requirements | 14 |
| Chapter 2 CONSOLE CLI MANAGEMENT | 16 |
| 2.1 Terminal Setup..... | 16 |
| 2.2 Logging on to the Console..... | 18 |
| 2.3 Configuring IP Address | 18 |
| Chapter 3 TELNET CLI MANAGEMENT..... | 21 |
| 3.1 Telnet Login | 21 |
| Chapter 4 Commands for CLI Configuration | 22 |
| 4.1 802.1x | 22 |
| 4.1.1 dot1x..... | 22 |
| 4.1.2 dot1x authentication..... | 23 |
| 4.1.3 dot1x reauthentication..... | 24 |
| 4.1.4 dot1x timeout reauth-period..... | 25 |
| 4.1.5 dot1x timeout quiet-period..... | 26 |
| 4.1.6 dot1x timeout supp-timeout..... | 26 |
| 4.1.7 dot1x max-req..... | 27 |
| 4.1.8 dot1x guest-vlan..... | 28 |
| 4.1.9 dot1x guest-vlan..... | 30 |
| 4.1.10 show dot1x..... | 32 |
| 4.1.11 show dot1x authenticated-hosts..... | 32 |
| 4.1.12 show dot1x interface | 33 |
| 4.1.13 show dot1x guest-vlan | 33 |
| 4.2 AAA..... | 35 |
| 4.2.1 aaa authentication..... | 35 |
| 4.2.2 login authentication | 36 |
| 4.2.3 ip http login authentication | 38 |
| 4.2.4 enable authentication..... | 40 |
| 4.2.5 show aaa authentication | 42 |
| 4.2.6 show line lists..... | 43 |

| | |
|---|-----------|
| 4.2.7 tacacs default-config | 44 |
| 4.2.8 tacacs host..... | 45 |
| 4.2.9 show tacacs default-config..... | 46 |
| 4.2.10 show tacacs | 46 |
| 4.2.11 radius default-config | 47 |
| 4.2.12 radius host | 48 |
| 4.2.13 show radius default-config | 49 |
| 4.2.14 show radius..... | 50 |
| 4.3 ACL | 51 |
| 4.3.1 mac acl..... | 51 |
| 4.3.2 permit (MAC)..... | 51 |
| 4.3.3 deny (MAC)..... | 52 |
| 4.3.4 ip acl | 54 |
| 4.3.5 permit (IP) | 54 |
| 4.3.6 deny (IP) | 56 |
| 4.3.7 ipv6 acl..... | 58 |
| 4.3.8 permit (IPv6) | 59 |
| 4.3.9 deny (IPv6)..... | 61 |
| 4.3.10 bind acl..... | 63 |
| 4.3.11 show acl utilization | 64 |
| 4.4 Administration | 66 |
| 4.4.1 enable | 66 |
| 4.4.2 exit | 67 |
| 4.4.3 configure | 67 |
| 4.4.4 interface | 68 |
| 4.4.5 line | 69 |
| 4.4.6 end..... | 69 |
| 4.4.7 reboot..... | 70 |
| 4.4.8 system name..... | 71 |
| 4.4.9 system contact..... | 72 |
| 4.4.10 system location | 73 |
| 4.4.11 username | 74 |
| 4.4.12 enable password..... | 75 |
| 4.4.13 ip address | 75 |
| 4.4.14 ip default-gateway..... | 76 |
| 4.4.15 ip dns | 77 |
| 4.4.16 ip dhcp | 78 |
| 4.4.17 ipv6 autoconfig..... | 79 |
| 4.4.18 ipv6 address..... | 79 |

| | |
|--|------------|
| 4.4.19 ipv6 default-gateway | 80 |
| 4.4.20 ipv6 dhcp..... | 81 |
| 4.4.21 ip service..... | 82 |
| 4.4.22 ip session-timeout | 83 |
| 4.4.23 exec-timeout | 84 |
| 4.4.24 password-thresh | 85 |
| 4.4.25 silent-time..... | 87 |
| 4.4.26 history | 88 |
| 4.4.27 clear service..... | 90 |
| 4.4.28 ssl | 91 |
| 4.4.29 ping | 92 |
| 4.4.30 traceroute..... | 92 |
| 4.4.31 clear arp..... | 93 |
| 4.4.32 show version | 94 |
| 4.4.33 show info..... | 94 |
| 4.4.34 show history | 95 |
| 4.4.35 show username..... | 96 |
| 4.4.36 show ip..... | 97 |
| 4.4.37 show ip dhcp | 97 |
| 4.4.38 show ipv6..... | 98 |
| 4.4.39 show ipv6 dhcp | 98 |
| 4.4.40 show line..... | 99 |
| 4.5 Cable Diagnostics | 101 |
| 4.5.1 show cable-diag interface | 101 |
| 4.6 DHCP Snooping..... | 102 |
| 4.6.1 Ip dhcp snooping..... | 102 |
| 4.6.2 ip dhcp snooping vlan | 102 |
| 4.6.3 ip dhcp snooping trust..... | 103 |
| 4.6.4 ip dhcp snooping verify | 104 |
| 4.6.5 ip dhcp snooping limit rate | 105 |
| 4.6.6 clear ip dhcp snooping statistics | 106 |
| 4.6.7 show ip dhcp snooping | 106 |
| 4.6.8 show ip dhcp snooping interface..... | 107 |
| 4.6.9 show ip dhcp snooping binding..... | 108 |
| 4.6.10 ip dhcp snooping option | 108 |
| 4.6.11 ip dhcp snooping option action..... | 109 |
| 4.6.12 ip dhcp snooping option circuit-id..... | 110 |
| 4.6.13 ip dhcp snooping option remote-id..... | 110 |
| 4.6.14 show ip dhcp snooping option..... | 111 |

| | |
|--|------------|
| 4.6.15 ip dhcp snooping database | 112 |
| 4.6.16 ip dhcp snooping database write-delay | 113 |
| 4.6.17 ip dhcp snooping database timeout | 114 |
| 4.6.18 clear ip dhcp snooping database statistics..... | 115 |
| 4.6.19 renew ip dhcp snooping database | 116 |
| 4.6.20 show ip dhcp snooping database..... | 117 |
| 4.7 DoS | 119 |
| 4.7.1 dos | 119 |
| 4.7.2 port dos | 122 |
| 4.7.3 ip gratuitous-arps | 122 |
| 4.7.4 show dos..... | 123 |
| 4.8 Dynamic ARP Inspection..... | 123 |
| 4.8.1 ip arp inspection..... | 123 |
| 4.8.2 ip arp inspection vlan | 124 |
| 4.8.3 ip arp inspection trust..... | 125 |
| 4.8.4 ip arp inspection validate..... | 126 |
| 4.8.5 ip arp inspection rate-limit | 127 |
| 4.8.6 clear ip arp inspection statistics | 128 |
| 4.8.7 show ip arp inspection | 128 |
| 4.8.8 show ip arp inspection interface..... | 129 |
| 4.9 GVRP | 131 |
| 4.9.1 gvrp | 131 |
| 4.9.2 gvrp (port) | 131 |
| 4.9.3 gvrp port registration mode | 132 |
| 4.9.4 gvrp port creation vlan forbidden..... | 133 |
| 4.9.5 clear gvrp statistics | 134 |
| 4.9.6 show gvrp statistics..... | 134 |
| 4.9.7 show gvrp..... | 135 |
| 4.9.8 show gvrp port configuration | 136 |
| 4.10 IGMP Snooping..... | 138 |
| 4.10.1 Ip igmp snooping..... | 138 |
| 4.10.2 ip igmp snooping report-suppression | 138 |
| 4.10.3 ip igmp snooping version | 139 |
| 4.10.4 ip igmp snooping unknown-multicast action..... | 140 |
| 4.10.5 ip igmp snooping forward-method..... | 141 |
| 4.10.6 ip igmp snooping querier..... | 142 |
| 4.10.7 ip igmp snooping vlan | 143 |
| 4.10.8 ip igmp snooping vlan parameters | 144 |
| 4.10.9 ip igmp snooping static port | 146 |

| | |
|---|------------|
| 4.10.10 ip igmp snooping vlan static router port..... | 147 |
| 4.10.11 ip igmp snooping static group..... | 148 |
| 4.10.12 ip igmp profile..... | 150 |
| 4.10.13 ip igmp filter..... | 151 |
| 4.10.14 ip igmp max-group | 152 |
| 4.10.15 clear ip igmp snooping groups | 154 |
| 4.10.16 clear ip igmp snooping statistics | 154 |
| 4.10.17 show ip igmp snooping counters..... | 155 |
| 4.10.18 show ip igmp snooping groups..... | 155 |
| 4.10.19 show ip igmp snooping router | 156 |
| 4.10.20 show ip igmp snooping querier | 156 |
| 4.10.21 show ip igmp snooping..... | 157 |
| 4.10.22 show ip igmp snooping vlan | 158 |
| 4.10.23 show ip igmp snooping forward-all..... | 159 |
| 4.10.24 show ip igmp profile | 159 |
| 4.10.25 show ip igmp port filter | 160 |
| 4.10.26 show ip igmp port max-group..... | 161 |
| 4.10.27 show ip igmp port max-group action | 162 |
| 4.11 IP Source Guard | 164 |
| 4.11.1 ip source verify | 164 |
| 4.11.2 ip source binding | 165 |
| 4.11.3 show ip source interface..... | 165 |
| 4.11.4 show ip source binding..... | 166 |
| 4.12 Link Aggregation..... | 168 |
| 4.12.1 lag load-balance..... | 168 |
| 4.12.2 lacp system-priority | 169 |
| 4.12.3 lacp port-priority | 169 |
| 4.12.4 lacp timeout..... | 170 |
| 4.12.5 lag | 171 |
| 4.12.6 show lag..... | 172 |
| 4.13 LLDP | 174 |
| 4.13.1 lldp | 174 |
| 4.13.2 lldp tx-interval..... | 175 |
| 4.13.3 lldp reinit-delay | 175 |
| 4.13.4 lldp holdtime-multiplier | 176 |
| 4.13.5 lldp tx-delay | 177 |
| 4.13.6 lldp tlv-select | 178 |
| 4.13.7 lldp tlv-select pvid..... | 179 |
| 4.13.8 lldp tlv-select vlan-name..... | 180 |

| | |
|---|------------|
| 4.13.9 lldp lldpdu..... | 182 |
| 4.13.10 lldp tx/rx..... | 182 |
| 4.13.11 lldp med..... | 184 |
| 4.13.12 lldp med tlv-select | 185 |
| 4.13.13 lldp med fast-start-report-count | 186 |
| 4.13.14 lldp med network-policy..... | 187 |
| 4.13.15 lldp med network-policy add remove..... | 188 |
| 4.13.16 lldp med network-policy auto..... | 189 |
| 4.13.17 lldp med location | 190 |
| 4.13.18 show lldp | 191 |
| 4.13.19 show lldp local-device | 192 |
| 4.13.20 show lldp neighbor | 195 |
| 4.13.21 show lldp med | 197 |
| 4.13.22 show lldp statistics | 199 |
| 4.13.23 show lldp tlv-overloading..... | 200 |
| 4.14 Logging | 202 |
| 4.14.1 logging | 202 |
| 4.14.2 logging flash buffered..... | 203 |
| 4.14.3 logging host..... | 204 |
| 4.14.4 show logging | 206 |
| 4.14.5 show logging flash buffered | 207 |
| 4.14.6 clear logging flash buffered | 208 |
| 4.15 MAC Address Table..... | 210 |
| 4.15.1 clear mac address-table..... | 210 |
| 4.15.2 mac address-table aging-time | 210 |
| 4.15.3 mac address-table static | 211 |
| 4.15.4 mac address-table static drop | 212 |
| 4.15.5 show mac address-table | 213 |
| 4.15.6 show mac address-table counters | 214 |
| 4.15.7 show mac address-table aging-time | 214 |
| 4.16 Mirror | 215 |
| 4.16.1 mirror session | 215 |
| 4.16.2 show mirror | 216 |
| 4.17 MLD Snooping..... | 218 |
| 4.17.1 ipv6 mld snooping | 218 |
| 4.17.2 ipv6 mld snooping report-suppression | 219 |
| 4.17.3 ipv6 mld snooping version..... | 219 |
| 4.17.4 ipv6 mld snooping vlan..... | 220 |
| 4.17.5 ipv6 mld snooping vlan parameters | 222 |

| | |
|--|------------|
| 4.17.6 ipv6 mld snooping vlan static-port..... | 223 |
| 4.17.7 ipv6 mld snooping vlan static-router-port | 224 |
| 4.17.8 ipv6 mld snooping vlan static-group..... | 225 |
| 4.17.9 ipv6 mld profile..... | 226 |
| 4.17.10 ipv6 mld filter..... | 228 |
| 4.17.11 ipv6 mld max-groups..... | 229 |
| 4.17.12 clear ipv6 mld snooping groups | 230 |
| 4.17.13 clear ipv6 mld snooping statistics..... | 231 |
| 4.17.14 show ipv6 mld snooping groups counters | 232 |
| 4.17.15 show ipv6 mld snooping groups..... | 232 |
| 4.17.16 show ipv6 mld snooping router | 233 |
| 4.17.17 show ipv6 mld snooping..... | 233 |
| 4.17.18 show ipv6 mld snooping vlan | 234 |
| 4.17.19 show ipv6 mld snooping forward-all | 235 |
| 4.17.20 show ipv6 mld profile..... | 236 |
| 4.17.21 show ipv6 mld filter | 236 |
| 4.17.22 show ipv6 mld max-group | 237 |
| 4.17.23 show ipv6 mld max-group action..... | 238 |
| 4.18 Port Security..... | 240 |
| 4.18.1 port-security | 240 |
| 4.18.2 port-security address-limit..... | 240 |
| 4.18.3 show port-security..... | 241 |
| 4.19 Port Error Disable | 243 |
| 4.19.1 errdisable recovery cause..... | 243 |
| 4.19.2 errdisable recovery interval..... | 244 |
| 4.19.3 show errdisable recovery | 245 |
| 4.20 Port | 247 |
| 4.20.1 description..... | 247 |
| 4.20.2 speed | 248 |
| 4.20.3 duplex | 249 |
| 4.20.4 flow-control..... | 249 |
| 4.20.5 shutdown..... | 251 |
| 4.20.6 jumbo-frame..... | 251 |
| 4.20.7 protected..... | 252 |
| 4.20.8 eee..... | 253 |
| 4.20.9 clear interface | 254 |
| 4.20.10 show interface..... | 255 |
| 4.21 QoS..... | 257 |
| 4.21.1 qos | 257 |

| | |
|--|------------|
| 4.21.2 qos trust | 258 |
| 4.21.3 qos map | 259 |
| 4.21.4 qos queue | 262 |
| 4.21.5 qos cos..... | 264 |
| 4.21.6 qos trust | 264 |
| 4.21.7 qos remark..... | 265 |
| 4.21.8 show qos..... | 266 |
| 4.21.9 show qos map..... | 267 |
| 4.21.10 show qos interface | 268 |
| 4.22 Rate Limit | 270 |
| 4.22.1 rate limit | 270 |
| 4.22.2 rate limit (interface) | 271 |
| 4.23 RMON | 273 |
| 4.23.1 rmon event..... | 273 |
| 4.23.2 rmon alarm..... | 274 |
| 4.23.3 rmon history | 276 |
| 4.23.4 clear rmon interfaces statistics..... | 277 |
| 4.23.5 show rmon event..... | 278 |
| 4.23.6 show rmon event log..... | 279 |
| 4.23.7 show rmon alarm | 279 |
| 4.23.8 show rmon history..... | 280 |
| 4.23.9 show rmon history statistics | 281 |
| 4.24 SNMP | 283 |
| 4.24.1 snmp | 283 |
| 4.24.2 snmp trap..... | 283 |
| 4.24.3 snmp view | 284 |
| 4.24.4 snmp access group..... | 285 |
| 4.24.5 snmp community..... | 286 |
| 4.24.6 snmp user | 287 |
| 4.24.7 snmp engineID..... | 288 |
| 4.24.8 snmp host | 289 |
| 4.24.9 show snmp..... | 290 |
| 4.24.10 show snmp trap..... | 291 |
| 4.24.11 show snmp view..... | 291 |
| 4.24.12 show snmp group..... | 292 |
| 4.24.13 show snmp community..... | 292 |
| 4.24.14 show snmp host..... | 293 |
| 4.24.15 show snmp user..... | 293 |
| 4.24.16 show snmp engineid | 293 |

| | |
|---|------------|
| 4.25 Storm Control | 295 |
| 4.25.1 storm-control unit | 295 |
| 4.25.2 storm-control ifg | 295 |
| 4.25.3 storm-control | 296 |
| 4.25.4 storm-control action | 298 |
| 4.25.5 show storm-control | 299 |
| 4.26 Spanning Tree | 301 |
| 4.26.1 spanning-tree | 301 |
| 4.26.2 spanning-tree bpdu | 302 |
| 4.26.3 spanning-tree mode | 302 |
| 4.26.4 spanning-tree priority | 303 |
| 4.26.5 spanning-tree hello-time | 304 |
| 4.26.6 spanning-tree max-hops | 305 |
| 4.26.7 spanning-tree forward-delay | 306 |
| 4.26.8 spanning-tree maximum-age | 307 |
| 4.26.9 spanning-tree tx-hold-count | 307 |
| 4.26.10 spanning-tree pathcost method | 308 |
| 4.26.11 spanning-tree port-priority | 309 |
| 4.26.12 spanning-tree cost | 309 |
| 4.26.13 spanning-tree edge | 310 |
| 4.26.14 spanning-tree bpdu-filter | 310 |
| 4.26.15 spanning-tree bpdu-guard | 311 |
| 4.26.16 spanning-tree link-type | 312 |
| 4.26.17 spanning-tree mst configuration | 312 |
| 4.26.18 spanning-tree mst priority | 314 |
| 4.26.19 spanning-tree mst cost | 314 |
| 4.26.20 spanning-tree mst port-priority | 315 |
| 4.27 System File | 317 |
| 4.27.1 boot system | 317 |
| 4.27.2 save | 318 |
| 4.27.3 copy | 318 |
| 4.27.4 delete | 320 |
| 4.27.5 restore-default | 321 |
| 4.27.6 show config | 321 |
| 4.27.7 show flash | 322 |
| 4.28 Time | 324 |
| 4.28.1 clock set | 324 |
| 4.28.2 clock timezone | 324 |
| 4.28.3 clock source | 325 |

| | |
|--|------------|
| 4.28.4 clock summer-time | 326 |
| 4.28.5 show clock | 328 |
| 4.28.6 snmp | 329 |
| 4.28.7 show snmp | 330 |
| 4.29 VLAN | 331 |
| 4.29.1 vlan | 331 |
| 4.29.2 vlan name | 331 |
| 4.29.3 switchport mode | 332 |
| 4.29.4 switchport hybrid pvid | 333 |
| 4.29.5 switchport hybrid ingress-filtering | 333 |
| 4.29.6 switchport hybrid acceptable-frame-type | 334 |
| 4.29.7 switchport hybrid allowed vlan add | 335 |
| 4.29.8 switchport hybrid allowed vlan remove | 335 |
| 4.29.9 switchport access vlan | 336 |
| 4.29.10 switchport tunnel vlan | 337 |
| 4.29.11 switchport trunk native vlan | 337 |
| 4.29.12 switchport trunk allowed vlan | 338 |
| 4.29.13 switchport default-vlan tagged | 338 |
| 4.29.14 switchport forbidden default-vlan | 339 |
| 4.29.15 switchport forbidden vlan | 340 |
| 4.29.16 management-vlan | 340 |
| 4.29.17 show management-vlan | 341 |
| 4.29.18 protocol-vlan group | 341 |
| 4.29.19 protocol vlan binding | 343 |
| 4.29.20 show protocol vlan group | 343 |
| 4.29.21 show protocol vlan interfaces | 344 |
| 4.30 Voice VLAN | 346 |
| 4.30.1 voice vlan | 346 |
| 4.30.2 voice vlan id | 346 |
| 4.30.3 voice vlan oui-table | 347 |
| 4.30.4 voice vlan cos | 347 |
| 4.30.5 voice vlan aging-time | 348 |
| 4.30.6 voice vlan cos mode | 349 |
| 4.30.7 voice vlan enable | 349 |
| 4.30.8 show voice vlan | 350 |

Chapter 1 COMMAND LINE INTERFACE

1.1 Accessing the CLI

When accessing the management interface for the switch over a direct connection to the server's console port, or via a Telnet connection, the switch can be managed by entering command keywords and parameters at the prompt. Using the switch's command-line interface (CLI) is very similar to entering commands on a UNIX system.

This chapter describes how to use the Command Line Interface (CLI).

1.2 Command Line Modes

The CLI groups all the commands in appropriate modes according to the nature of the command. A sample of the CLI command modes is described below. Each of the command modes supports specific software commands.

Mode-based Command Hierarchy

The **Command Line Interface (CLI)** groups all the commands in appropriate modes by the nature of the commands. Examples of the CLI command modes are described below. Each of the command modes supports specific switch's commands.

The CLI Command Modes table captures the command modes; the prompts are visible in that mode and the exit method from that mode.

| Command Mode | Access Method | Prompt | Exit or Access Previous Mode |
|------------------------------|---|----------------------------|---|
| User Mode | This is the first level of access. Perform basic tasks and list system information. | COMMAND> | Enter Logout command |
| Privileged Mode | From the User Mode, enter the enable command. | Switch# | To exit to the User Mode, enter exit or Logout. |
| Global Config Mode | From the Privileged Mode, enter the configuration command. | Switch (Config)# | To exit to the Privileged Mode, enter the exit command. |
| Interface Config Mode | From the Global Config mode, enter the interface <port#> command. | Switch (config-if)# | To exit to the Global Config mode, enter exit. |

Table 4-1 CLI Command Modes

The CLI is divided into various modes. The commands in one mode are not available until the operator switches to that particular mode. The commands available to the operator at any point in time depend upon the mode. Entering a question mark (?) at the CLI prompt, and displays a list of the available commands and descriptions of the commands.

The CLI provides the following modes:

■ User Mode

When the operator logs into the CLI, the User Mode is the initial mode. The User Mode contains a limited set of commands. The command prompt shown at this level is:

Command Prompt: switch>

■ Privileged Mode

To have access to the full suite of commands, the operator must enter the Privileged Mode. The Privileged Mode requires password authentication. From Privileged Mode, the operator can issue any Exec command to enter the Global Configuration mode. The command prompt shown at this level is:

Command Prompt: switch#

■ Global Config Mode

This mode permits the operator to make modifications to the running configuration. General setup commands are grouped in this mode. From the Global Configuration mode, the operator can enter the Interface Configuration mode. The command prompt at this level is:

Command Prompt: switch(Config)#

From the Global Config mode, the operator may enter the following configuration modes:

■ Interface Config Mode

Many features are enabled for a particular interface. The Interface commands enable or modify the operation of an interface. In this mode, a physical port is set up for a specific logical connection operation. The command prompt at this level is:

Command Prompt: Switch(config-if)#

1.3 Command Help

To enter ? at any command mode, and the CLI will return possible commands at that point, along with some description of the keywords:

```
Switch(config)# copy ftp ?  
running-config Running configurations  
startup-config Startup configurations  
firmware Runtime firmware image
```

To use the <Tab> key to do keyword auto completion:

```
Switch(config)# copy tftp r<Tab>
```

```
Switch(config)# copy tftp running-config
```

You do not need to type in the entire commands; you only need to type in enough characters for the CLI to recognize the command as unique. The following example shows you how to enter the show running-config command:

```
Switch(config)# sh ru
```

Note: If you want to stop displaying the information, press key “q” to escape.

1.4 Command Line Editing

Before you press <Enter>, the current command line can be edited using special keys including arrows and <Ctrl> keys. The following table describes the special keys and their function supported by the CLI:

| Keys | Function |
|-------------|--|
| <Ctrl>-B; ← | Moves the cursor back one character |
| <Ctrl>-D | Deletes the character at the cursor |
| <Ctrl>-E | Jumps to the end of the current command line |
| <Ctrl>-F; → | Moves the cursor forward one character |
| <Ctrl>-K | Deletes from the cursor to the end of the command line |
| <Ctrl>-N; ↓ | Enters the next command line in the command history |
| <Ctrl>-P; ↑ | Enters the previous command line in the command history |
| <Ctrl>-U | Deletes from the cursor to the beginning of the command line |
| <Ctrl>-W | Deletes the last word typed |
| <Esc> B | Moves the cursor backward one word |
| <Esc> D | Deletes from the cursor to the end of the word |
| <Esc> F | Moves the cursor forward one word |
| <Backspace> | Delete the character before the cursor |
| | Delete the character at the cursor |

1.5 Requirements

- **Workstations** running Windows XP/Vista/7/8/, Windows 2003/2008, MAC OS X or later, Linux, UNIX, or other platforms are compatible with TCP/IP protocols.
- Workstations are installed with Ethernet NIC (Network Interface Card)

■ **Serial Port** Connection (Terminal)

- The above Workstations come with **COM Port** (DB9) or **USB-to-RS-232** converter.
- The above Workstations have been installed with **terminal emulator**, such as Hyper Terminal included in Windows XP/2003.
- **Serial cable** -- one end is attached to the RS-232 serial port, while the other end to the console port of the Managed Switch.

■ **Ethernet Port** Connection

- Network cables -- Use standard network (UTP) cables with RJ-45 connectors.
- The above PC is installed with Web browser and JAVA runtime environment plug-in.

Chapter 2 CONSOLE CLI MANAGEMENT

2.1 Terminal Setup

To configure the system, connect a serial cable to a **COM port** on a PC or notebook computer and to RJ-45 type of serial (console) port of the Managed Switch.

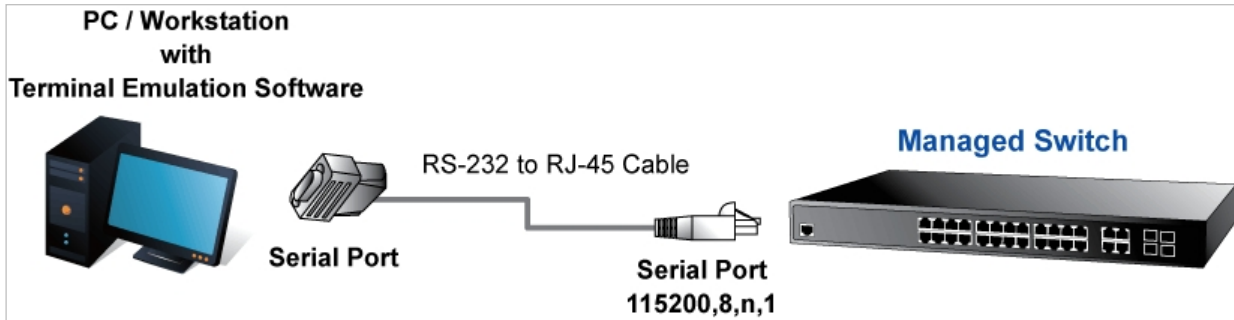


Figure 2-1 Managed Switch Console Connectivity

The console port of the Managed Switch is an RJ45 type, RS-232 serial port connector. It is an interface for connecting a terminal directly. Through the console port, it provides rich diagnostic information including IP Address setting, factory reset, port management, link status and system setting. Users can use the attached RS-232 cable in the package and connect to the console port on the device. After the connection, users can run any terminal emulation program (Hyper Terminal, ProComm Plus, Telix, Winterm and so on) to enter the startup screen of the device.

GS-4210 Series Rear Panel



Figure 2-2: Rear Panel of GS-4210 Series

Console port

A terminal program is required to make the software connection to the Managed Switch. Windows' **Hyper Terminal** program may be a good choice. The Hyper Terminal can be accessed from the **Start** menu.

1. Click **START**, then **Programs, Accessories** and then **Hyper Terminal**.
2. When the following screen appears, make sure that the COM port should be configured as:

| | |
|----------------|----------|
| ◆ Baud | : 115200 |
| ◆ Data bits | : 8 |
| ◆ Parity | : None |
| ◆ Stop bits | : 1 |
| ◆ Flow control | : None |

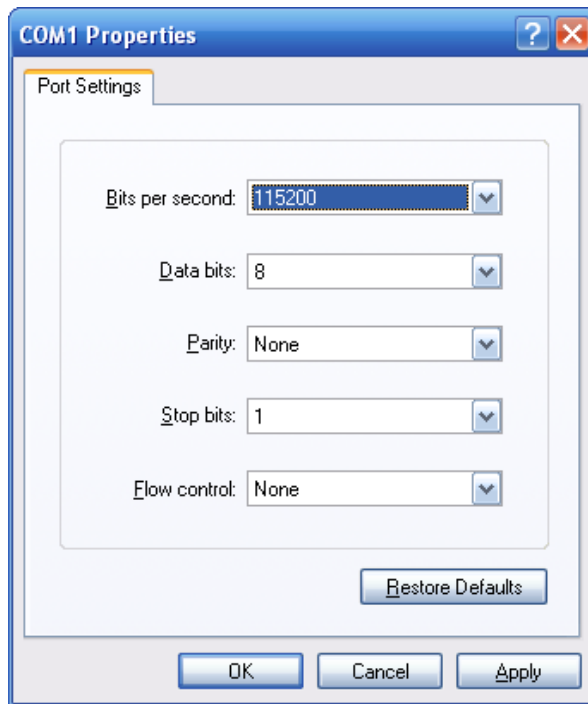


Figure 2-3 Hyper Terminal COM Port Configuration

You can change these settings, if desired, after you log on. This management method is often preferred because you can remain connected and monitor the system during system reboots. Also, certain error messages are sent to the serial port, regardless of the interface through which the associated action was initiated. A Macintosh or PC attachment can use any terminal-emulation program for connecting to the terminal serial port. A workstation attachment under UNIX can use an emulator such as TIP.

2.2 Loggin on to the Console

Once the terminal is connected to the device, power on the Managed Switch, and the terminal will display “running testing procedures”. Then, the following message asks to log in user name and password. The factory default user name and password are shown as follows and the login screen in [Figure 3-1](#) appears.

```
Username: admin
Password: admin
```

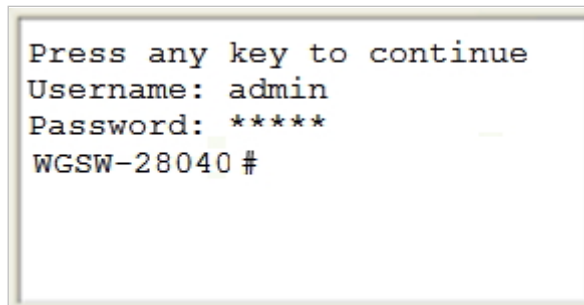


Figure 3-1: Managed Switch Console Login Screen

The user can now enter commands to manage the Managed Switch. For a detailed description of the commands, please refer to the following chapters.



1. For security reason, please change and memorize the new password after this first setup.
2. Only accept command in lowercase letter under console interface.

2.3 Configuring IP Address

The Managed Switch is shipped with default IP address shown below.

```
IP Address: 192.168.0.100
Subnet Mask: 255.255.255.0
```

To check the current IP address or modify a new IP address for the Switch, please use the procedure as follows:

■ Showing the Current IP Address

1. At the “#” prompt, enter “**show ip**”.
2. The screen displays the current IP address and Subnet Mask as shown in [Figure 3-2](#).

```
Press any key to continue
Username: admin
Password: *****
WGSW-28040# show ip
IP Address: 192.168.0.100
Subnet Netmask: 255.255.255.0
Default Gateway: 192.168.0.254
```

Figure 3-2: IP Information Screen

■ Configuring IP Address

3. On "GS-4210#" prompt, enter "configure".
4. On "GS-4210(config)#" prompt, enter the following command and press <Enter> as shown in Figure 3-3.

```
GS-4210(config)# ip address 192.168.1.100 mask 255.255.255.0
GS-4210(config)# ip default-gateway 192.168.1.254
```

The previous command would apply the following settings for the Switch.

IP Address: 192.168.1.100
Subnet Mask: 255.255.255.0
Gateway: 192.168.1.254

```
Press any key to continue
Username: admin
Password: *****
WGSW-28040# configure
WGSW-28040(config)# ip address 192.168.1.100 mask 255.255.255.0
WGSW-28040(config)# ip default-gateway 192.168.1.254
```


Figure 3-3: Configuring IP Address Screen

5. Repeat step 1 to check if the IP address has changed.

■ Storing Current Switch Configuration

6. At the “#” prompt, enter the following command and press <Enter>.

```
# copy running-config startup-config
```

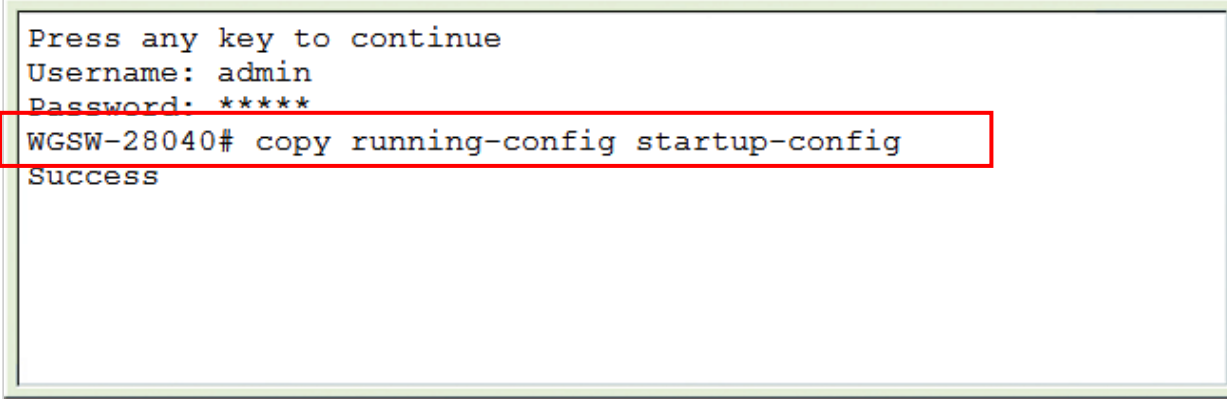

```
Press any key to continue
Username: admin
Password: *****
WGSW-28040# copy running-config startup-config
Success
```

Figure 3-4: Saving Current Configuration Command Screen

If the IP is successfully configured, the Managed Switch will apply the new IP address setting immediately. You can access the Web interface of the Managed Switch through the new IP address.



Note

If you are not familiar with the console command or the related parameter, enter “?” anytime in console to get the help description.

Chapter 3 TELNET CLI MANAGEMENT

3.1 Telnet Login

The Managed Switch also supports telnet for remote management. The switch asks for user name and password for remote login when using telnet; please use “**admin**” for both username and password.

Default IP address: **192.168.0.100**

Username: **admin**

Password: **admin**

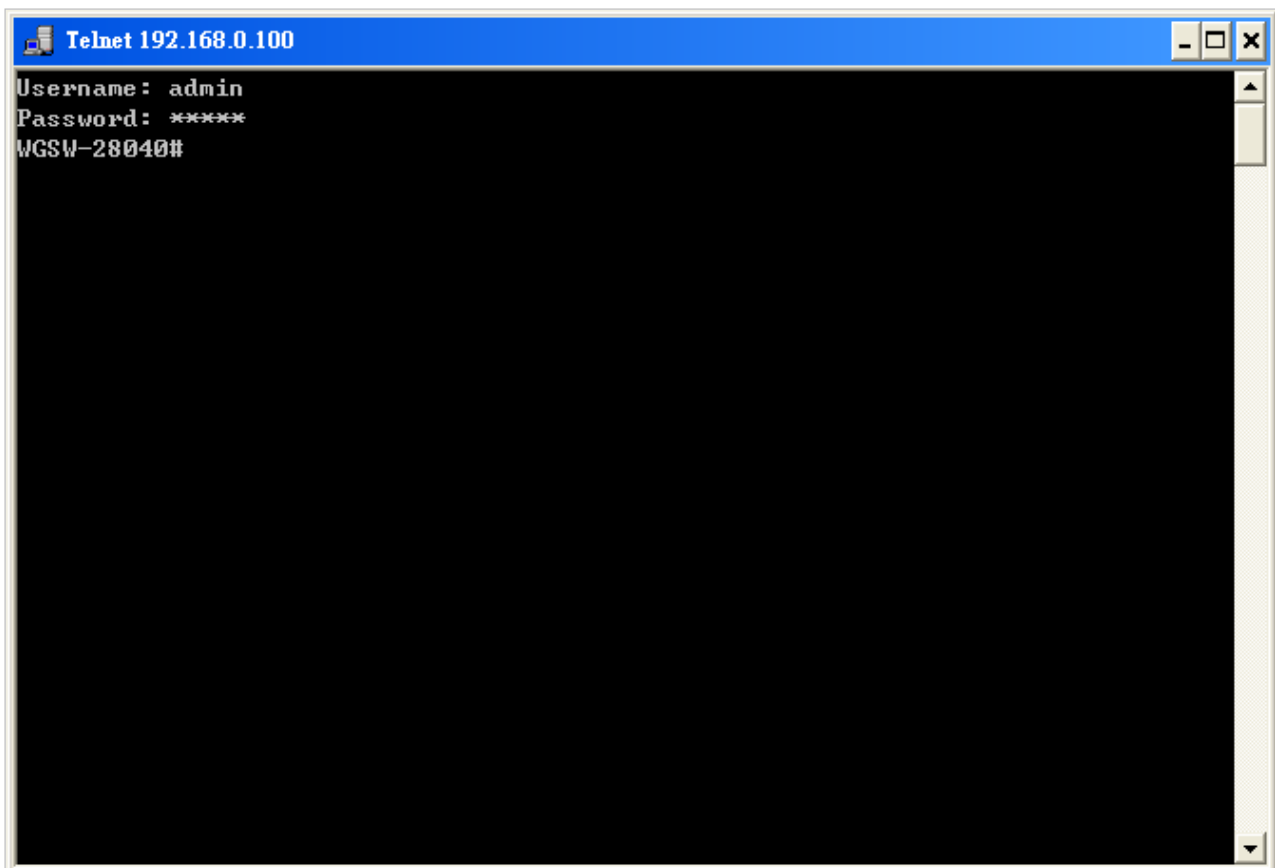


Figure 4-1 Managed Switch Telnet Login Screen

Chapter 4 Commands for CLI Configuration

4.1 802.1x

4.1.1 dot1x

Command:

```
dot1x
no dot1x
```

Default:

Default is disabled

Mode:

Global Configuration

Usage Guide:

The “**dot1x**” command enables the global setting of IEEE 802.1X port-based network access control. Only when it is enabled, can the port-based setting work.

Use the **no** form of this command to disable

Example:

The following example shows how to enable 802.1X access control on port 1.

```
Switch(config)# dot1x
switch(config)# interface gi1
switch(config-if)# dot1x auto
switch(config-if)# exit
switch(config)# show dot1x
802.1x protocol is: Enabled
802.1x protocol version: 2
switch(config)# show dot1x interfaces gi1
Port | Mode | Current State | Reauth Control | Reauth Period
-----+-----+-----+-----+-----
gi1 Authentication | Initialize | Enabled | 3600
Quiet Period: 60 Second
Supplicant timeout: 30 Second
Max req: 2
```

Session Time (HH:MM:SS): 0: 0: 0: 0

4.1.2 dot1x authentication

Command:

```
dot1x (auto|force-auth|force-unauth)
```

```
no dot1x
```

Parameter:

| | |
|---------------------|--|
| auto | Port control will depend on the outcome of authentication. |
| force-auth | Force this port to be unconditional authorized. |
| force-unauth | Force this port to be unconditional unauthorized. |

Default:

Default is disabled

Mode:

Interface Configuration

Usage Guide:

Use the “**dot1x**” command to enable 802.1X function on port. Use the **no** form of this command to disable this function.

The enable of 802.1X global setting is a must

Example:

The following example shows how to enable 802.1X access control on port 1.

```
Switch(config)# dot1x
switch(config)# interface gi1
switch(config-if)# dot1x auto
switch(config-if)# exit
switch(config)# show dot1x
802.1x protocol is: Enabled
802.1x protocol version: 2
switch(config)# show dot1x interfaces gi1
Port | Mode | Current State | Reauth Control | Reauth Period
-----+-----+-----+-----+-----
```

```
gi1 Authentication | Initialize | Enabled | 3600
Quiet Period: 60 Second
Supplicant timeout: 30 Second
Max req: 2
Session Time (HH:MM:SS): 0: 0: 0
```

4.1.3 dot1x reauthentication

Command:

```
dot1x reauth
no dot1x reauth
```

Default:

Default is disabled

Mode:

Interface Configuration

Usage Guide:

Use the “**dot1x reauth**” command to enable 802.1X periodical reauthentication function on port. Use the **no** form of this command to disable this function.

Example:

The following example shows how to enable 802.1X access control on port 1.

```
switch(config)# interface gi1
switch(config-if)# dot1x reauth
switch(config-if)# exit
switch(config)# show dot1x
802.1x protocol is: Enabled
802.1x protocol version: 2
switch(config)# show dot1x interfaces gi1
Port | Mode | Current State | Reauth Control | Reauth Period
-----+-----+-----+-----+-----
gi1 Authentication | Initialize | Enabled | 3600
Quiet Period: 60 Seconds
Supplicant Timeout: 30 Seconds
```



```
Max req: 2
Session Time (HH:MM:SS): 0: 0: 0: 0
```

4.1.4 dot1x timeout reauth-period

Command:

```
dot1x timeout reauth-period <30-65535>

no dot1x timeout reauth-period
```

Parameter:

<30-65535> Specify the re-authentication period.

Default:

3600 seconds

Mode:

Interface Configuration

Usage Guide:

Use the “**dot1x timeout reauth-period**” command to configure the re-authentication period. Use the **no** form of this command to restore the period to default value.

Example:

The example shows how to configure re-authentication period to 300 sec. on port 1.

```
switch(config)# interface gi1
switch(config-if)# dot1x timeout reauth-period 300
switch(config-if)# exit
switch(config)# show dot1x interfaces gi1
Port | Mode | Current State | Reauth Control | Reauth Period
-----+-----+-----+-----+-----
gi1 Authentication | Initialize | Enabled | 300
Quiet Period: 60 Seconds
Supplicant Timeout: 30 Seconds
Max req: 2
Session Time (HH:MM:SS): 0: 0: 0: 0
```

4.1.5 dot1x timeout quiet-period

Command:

```
dot1x timeout quiet-period <0-65535>
```

```
no dot1x timeout quiet-period
```

Parameter:

<0-65535> Specify the quiet period.

Default:

36 seconds

Mode:

Interface Configuration

Usage Guide:

Use the “**dot1x timeout quiet-period**” command to configure the quiet period. Use the **no** form of this command to restore the period to default value.

Example:

The example shows how to configure quiet period to 300 sec. on port 1.

```
switch(config)# interface gi1
switch(config-if)# dot1x timeout quiet-period 300
switch(config-if)# exit
switch(config)# show dot1x interfaces gi1
Port | Mode | Current State | Reauth Control | Reauth Period
-----+-----+-----+-----+-----
gi1 Authentication | Initialize | Enabled | 3600
Quiet Period: 300 Seconds
Supplicant Timeout: 30 Seconds
Max req: 2
Session Time (HH:MM:SS): 0: 0: 0
```

4.1.6 dot1x timeout supp-timeout

Command:

```
dot1x timeout supp-timeout <1-65535>
```

```
no dot1x timeout supp-timeout
```

Parameter:

<1-65535> Specify the supplicant period.

Default:

30 seconds

Mode:

Interface Configuration

Usage Guide:

Use the “**dot1x timeout supp-timeout**” command to configure the supplicant period. Use the **no** form of this command to restore the period to default value.

Example:

The example shows how to configure supplicant period to 300 sec. on port 1.

```
switch(config)# interface gi1
switch(config-if)# dot1x timeout supp-timeout 300
switch(config-if)# exit
switch(config)# show dot1x interfaces gi1
Port | Mode | Current State | Reauth Control | Reauth Period
-----+-----+-----+-----+-----
gi1 Authentication | Initialize | Enabled | 3600
Quiet Period: 60 Seconds
Supplicant Timeout: 300 Seconds
Max req: 2
Session Time (HH:MM:SS): 0: 0: 0
```

4.1.7 dot1x max-req

Command:

```
dot1x max-req <1-10>
```

```
no dot1x max-req
```

Parameter:

<1-10> Specify the maximum request retries.

Default:

2 times

Mode:

Interface Configuration

Usage Guide:

Use the “**dot1x max-req**” command to configure the maximum request retries. Use the **no** form of this command to restore the period to default value.

Example:

The example shows how to configure maximum request retries to 4 times on port 1.

```
switch(config)# interface gi1
switch(config-if)# dot1x max-req 4
switch(config-if)# exit
switch(config)# show dot1x interfaces gi1
Port | Mode | Current State | Reauth Control | Reauth Period
-----+-----+-----+-----+-----
gi1 Authentication | Initialize | Enabled | 3600
Quiet Period: 60 Seconds
Supplicant Timeout: 30 Seconds
Max req: 4
Session Time (HH:MM:SS): 0: 0: 0
```

4.1.8 dot1x guest-vlan

Command:

```
dot1x guest-vlan <1-4094>

no dot1x guest-vlan
```

Parameter:

<1-4094> Specify VLAN ID to enable 802.1X guest VLAN.

Default:

Default is disabled

Mode:

Global Configuration

Usage Guide:

Use the **dot1x guest-vlan** command to globally enable guest VLAN function. Use the **no** form of this command to disable guest VLAN function.

For a port to become a member of guest VLAN after authentication fail, you should also enable guest VLAN on that port.

Example:

The example shows how to configure VLAN 2 as guest VLAN and enable guest VLAN on port 1.

```

switch(config)# dot1x guest-vlan 2
switch(config)# interface gi1
switch(config-if)# dot1x auto
switch(config-if)# dot1x guest-vlan
switch(config-if)# exit
switch(config)# show dot1x guest-vlan
Guest VLAN ID: 2
Port | Guest VLAN | In Guest VLAN
-----+-----+-----
gi1 | Enabled | No
gi2 | Disabled | ---
gi3 | Disabled | ---
gi4 | Disabled | ---
gi5 | Disabled | ---
gi6 | Disabled | ---
gi7 | Disabled | ---
gi8 | Disabled | ---
gi9 | Disabled | ---
gi10 | Disabled | ---
gi11 | Disabled | ---
gi12 | Disabled | ---
gi13 | Disabled | ---
gi14 | Disabled | ---
gi15 | Disabled | ---
gi16 | Disabled | ---
gi17 | Disabled | ---
gi18 | Disabled | ---
gi19 | Disabled | ---

```

```

gi20 | Disabled | ---
gi21 | Disabled | ---
gi22 | Disabled | ---
gi23 | Disabled | ---
gi24 | Disabled | ---
gi25 | Disabled | ---
gi26 | Disabled | ---
gi27 | Disabled | ---
gi28 | Disabled | ---

```

4.1.9 dot1x guest-vlan

Command:

```

dot1x guest-vlan <1-4094>

no dot1x guest-vlan

```

Parameter:

<1-4094> Specify VLAN ID to enable 802.1X guest VLAN.

Default:

Default is disabled

Mode:

Interface Configuration

Usage Guide:

Use the **dot1x guest-vlan** command to enable guest VLAN function on a port. Use the **no** form of this command to disable guest VLAN function.

For a port to become a member of guest VLAN after authentication fail, you should also globally enable guest VLAN.

Example:

The example shows how to configure VLAN 2 as guest VLAN and enable guest VLAN on port 1.

```

switch(config)# dot1x guest-vlan 2 enable
switch(config)# interface gi1
switch(config-if)# dot1x auto
switch(config-if)# dot1x guest-vlan

```

```
switch(config-if)# exit
switch(config)# show dot1x guest-vlan
Guest VLAN ID: 2
Port | Guest VLAN | In Guest VLAN
-----+-----+-----
gi1 | Enabled | No
gi2 | Disabled | ---
gi3 | Disabled | ---
gi4 | Disabled | ---
gi5 | Disabled | ---
gi6 | Disabled | ---
gi7 | Disabled | ---
gi8 | Disabled | ---
gi9 | Disabled | ---
gi10 | Disabled | ---
gi11 | Disabled | ---
gi12 | Disabled | ---
gi13 | Disabled | ---
gi14 | Disabled | ---
gi15 | Disabled | ---
gi16 | Disabled | ---
gi17 | Disabled | ---
gi18 | Disabled | ---
gi19 | Disabled | ---
gi20 | Disabled | ---
gi21 | Disabled | ---
gi22 | Disabled | ---
gi23 | Disabled | ---
gi24 | Disabled | ---
gi25 | Disabled | ---
gi26 | Disabled | ---
gi27 | Disabled | ---
gi28 | Disabled | ---
```

4.1.10 show dot1x

Command:

```
show dot1x
```

Mode:

Privileged EXEC

Usage Guide:

Use “**show dot1x**” command to show dot1x enabling status.

Example:

This example shows how to show the dot1x enabling status.

```
Switch# show dot1x
802.1x protocol is: Disabled
802.1x protocol version: 2
```

4.1.11 show dot1x authenticated-hosts

Command:

```
show dot1x auth-hosts
```

Mode:

Privileged EXEC

Usage Guide:

Use “**show dot1x auth-hosts**” command to show all dot1x authorized hosts.

Example:

This example shows how to show the dot1x authorized hosts.

```
Switch# show dot1x auth-hosts
User Name | Port | Session Time | Authentication Method | MAC Address
-----+-----+-----+-----+-----
8389_1 | GE3 | 0: 0: 0:20 | Remote | 00:30:4F:D5:5C:19
```


4.1.12 show dot1x interface

Command:

```
show dot1x interface IF_PORTS
```

Parameter:

IF_PORTS Select port to show dot1x configurations.

Mode:

Privileged EXEC

Usage Guide:

Use “**show dot1x interfaces**” command to show dot1x information of the specified port.

Example:

This example shows how to show dot1x configurations on interface gi1.

```
Switch# show dot1x interfaces gi1
Port | Mode | Current State | Reauth Control | Reauth Period
-----+-----+-----+-----+-----
gi1 | 802.1X Disabled | - | Enabled | 3600
Quiet Period: 60 Second
Supplicant timeout: 30 Second
Max req: 2
Session Time (HH:MM:SS): 0: 0: 0
```

4.1.13 show dot1x guest-vlan

Command:

```
show dot1x guest-vlan
```

Mode:

Privileged EXEC

Usage Guide:

Use “**show dot1x guest-vlan**” command to show dot1x guest-vlan status.

Example:

This example shows how to show the dot1x guest-vlan status.

```
Switch# show dot1x guest-vlan
Guest VLAN ID: 2
Port | Guest VLAN | In Guest VLAN
-----+-----+-----
gi1 | Enabled | No
gi2 | Disabled | ---
gi3 | Disabled | ---
gi4 | Disabled | ---
gi5 | Disabled | ---
gi6 | Disabled | ---
gi7 | Disabled | ---
gi8 | Disabled | ---
gi9 | Disabled | ---
gi10 | Disabled | ---
gi11 | Disabled | ---
gi12 | Disabled | ---
gi13 | Disabled | ---
gi14 | Disabled | ---
gi15 | Disabled | ---
gi16 | Disabled | ---
gi17 | Disabled | ---
gi18 | Disabled | ---
gi19 | Disabled | ---
gi20 | Disabled | ---
gi21 | Disabled | ---
gi22 | Disabled | ---
gi23 | Disabled | ---
gi24 | Disabled | ---
gi25 | Disabled | ---
gi26 | Disabled | ---
gi27 | Disabled | ---
gi28 | Disabled | ---
```

4.2 AAA

4.2.1 aaa authentication

Command:

```
aaa authentication (login | enable) (default | LISTNAME) METHODLIST
[METHODLIST] [METHODLIST] [METHODLIST]

no aaa authentication (login | enable) LISTNAME
```

Parameter:

| | |
|-------------------|--|
| login | Add/Edit login authentication list |
| enable | Add/Edit enable authentication list |
| default | Edit default authentication list |
| LISTNAME | Specify the list name for authentication type |
| METHODLIST | Specify the authenticate method, including none, local, enable, tacacs+, radius. |

Default:

Default authentication list name for type login is "default" and default method is "local".

Default authentication list name for type enable is "default" and default method is "enable"

Mode:

Global Configuration

Usage Guide:

Login authentication is used when user try to login into the switch. Such as CLI login dialog and WEBUI login web page.

Enable authentication is used only on CLI for user trying to switch from User EXEC mode to Privileged EXEC mode.

Both of them support following authenticate methods.

Local: Use local user account database to authenticate. (This method is not supported for enable authentication)

Enable: Use local enable password database to authenticate.

Tacacs+: Use remote Tacacs+ server to authenticate.

Radius: Use remote Radius server to authenticate.

None: Do nothing and just make user to be authenticated.

Each list allows you to combine these methods with different orders. For example, we want to authenticate login user with remote Tacacs+ server, but server may be crashed. Therefore, we need a backup plan, such as another Radius server. So we can configure the list with Tacacs+ server as first authentication method and Radius server as second one.

Use no form to delete the existing list. However, "default" list is not allowed to remove.

Example:

This example shows how to add a login authentication list to authenticate with order tacacs+, radius, local.

```
Switch(config)# aaa authentication login test1 tacacs+ radius local
```

This example shows how to show existing login authentication lists

```
Switch# show aaa authentication login lists
Login List Name | Authentication Method List
-----+-----
default | local
test1 | tacacs+ radius local
```

This example shows how to add an enable authentication list to authenticate with order tacacs+, radius, enable.

```
Switch(config)# aaa authentication enable test1 tacacs+ radius enable
```

This example shows how to show existing enable authentication lists

```
Switch# show aaa authentication login lists
Enable List Name | Authentication Method List
-----+-----
default | enable
test2 | tacacs+ radius enable
```

4.2.2 login authentication

Command:

```
login authentication LISTNAME

no login authentication
```

Parameter:

LISTNAME Specify the login authentication list name to use.

Default:

Default login authentication list for each line is "default".

Mode:

Line Configuration

Usage Guide:

Different access methods are allowed to bind different login authentication lists. Use "login authentication" command to bind the list to specific line (console, telnet, ssh).

Use no form to bind the "default" list back.

Example:

This example shows how to create a new login authentication list and bind to telnet line.

```
Switch(config)# aaa authentication login test1 tacacs+ radius local
Switch(config)# line telnet
Switch(config-line)# login authentication test1
```

This example shows how to show line binding lists.

```
Switch# show line lists
Line Type | AAA Type | List Name
-----+-----+-----
console | login | default
| enable | default
| exec | default
| commands | default
| accounting-exec | default
telnet | login | test1
| enable | default
| exec | default
| commands | default
| accounting-exec | default
ssh | login | default
| enable | default
| exec | default
| commands | default
| accounting-exec | default
http | login | default
```

```
https | login | default
```

4.2.3 ip http login authentication

Command:

```
ip (http | https) login authentication LISTNAME
```

```
no ip (http | https) login authentication
```

Parameter:

| | |
|------------------------|---|
| http | Bind login authentication list to user access WEBUI with http protocol |
| https | Bind login authentication list to user access WEBUI with https protocol |
| <i>LISTNAME</i> | Specify the login authentication list name to use. |

Default:

Default login authentication list for each line is "default".

Mode:

Global Configuration

Usage Guide:

Different access methods are allowed to bind different login authentication lists. Use "**ip (http | https) login authentication**" command to bind the list to WEBUI access from http or https.

Use no form to bind the "default" list back.

Example:

This example shows how to create two new login authentication lists and bind to http and https.

```
Switch(config)# aaa authentication login test1 tacacs+ radius local
Switch(config)# aaa authentication login test2 radius local
Switch(config)# ip http login authentication test1
Switch(config)# ip https login authentication test2
```

This example shows how to show line binding lists.

```
Switch# show line lists
Line Type | AAA Type | List Name
-----+-----+-----
```

console | login | default
| enable | default
| exec | default
| commands | default
| acct-exec | default
| acct-cmd(0) | default
| acct-cmd(1) | default
| acct-cmd(2) | default
| acct-cmd(3) | default
| acct-cmd(4) | default
| acct-cmd(5) | default
| acct-cmd(6) | default
| acct-cmd(7) | default
| acct-cmd(8) | default
| acct-cmd(9) | default
| acct-cmd(10) | default
| acct-cmd(11) | default
| acct-cmd(12) | default
| acct-cmd(13) | default
| acct-cmd(14) | default
| acct-cmd(15) | default
telnet | login | default
| enable | default
| exec | default
| commands | default
| acct-exec | default
| acct-cmd(0) | default
| acct-cmd(1) | default
| acct-cmd(2) | default
| acct-cmd(3) | default
| acct-cmd(4) | default
| acct-cmd(5) | default
| acct-cmd(6) | default
| acct-cmd(7) | default
| acct-cmd(8) | default
| acct-cmd(9) | default
| acct-cmd(10) | default
| acct-cmd(11) | default

```
| acct-cmd(12) | default
| acct-cmd(13) | default
| acct-cmd(14) | default
| acct-cmd(15) | default
ssh | login | default
| enable | default
| exec | default
| commands | default
| acct-exec | default
| acct-cmd( 0) | default
| acct-cmd( 1) | default
| acct-cmd( 2) | default
| acct-cmd( 3) | default
| acct-cmd( 4) | default
| acct-cmd( 5) | default
| acct-cmd( 6) | default
| acct-cmd( 7) | default
| acct-cmd( 8) | default
| acct-cmd( 9) | default
| acct-cmd(10) | default
| acct-cmd(11) | default
| acct-cmd(12) | default
| acct-cmd(13) | default
| acct-cmd(14) | default
| acct-cmd(15) | default
http | login | test1
https | login | test2
```

4.2.4 enable authentication

Command:

```
enable authentication LISTNAME

no enable authentication
```

Parameter:

LISTNAME Specify the login authentication list name to use.

Default:

Default enable authentication list for each line is "default".

Mode:

Line Configuration

Usage Guide:

Different access methods are allowed to bind different enable authentication lists. Use "**enable authentication**" command to bind the list to specific line (console, telnet, ssh).

Use no form to bind the "default" list back.

Example:

This example shows how to create a new enable authentication list and bind to telnet line.

```
Switch(config)# aaa authentication enable test1 tacacs+ radius enable
Switch(config)# line telnet
Switch(config-line)# enable authentication test1
```

This example shows how to show line binding lists.

```
Switch# show line lists
Line Type | AAA Type | List Name
-----+-----+-----
console | login | default
| enable | default
| exec | default
| commands | default
| accounting-exec | default
telnet | login | default
| enable | test1
| exec | default
| commands | default
| accounting-exec | default
ssh | login | default
| enable | default
| exec | default
| commands | default
| accounting-exec | default
http | login | default
```

https | login | default

4.2.5 show aaa authentication

Command:

show aaa authentication (login | enable) lists

Parameter:

| | |
|---------------|---------------------------------|
| login | Show login authentication list |
| enable | Show enable authentication list |

Mode:

Privileged EXEC

Usage Guide:

Use “**show aaa authentication**” command to show login authentication or enable authentication method lists.

Example:

This example shows how to show existing login authentication lists

```
Switch# show aaa authentication login lists
Login List Name | Authentication Method List
-----+-----
default | local
test1 | tacacs+ radius local
```

This example shows how to show existing enable authentication lists

```
Switch# show aaa authentication login lists
Enable List Name | Authentication Method List
-----+-----
default | enable
test2 | tacacs+ radius enable
```

4.2.6 show line lists

Command:

```
show line lists
```

Mode:

Privileged EXEC

Usage Guide:

Use “**show line lists**” command to show all lines’ binding list of all authentication, authorization, and accounting function.

Example:

This example shows how to show line binding lists.

```
Switch# show line lists
Line Type | AAA Type | List Name
-----+-----+-----
console | login | default
| enable | default
| exec | default
| commands | default
| accounting-exec | default
telnet | login | default
| enable | default
| exec | default
| commands | default
| accounting-exec | default
ssh | login | default
| enable | default
| exec | default
| commands | default
| accounting-exec | default
http | login | default
https | login | default
```

4.2.7 tacacs default-config

Command:

```
tacacs default-config [key TACACSKEY] [timeout <1-30>]
```

Parameter:

- key TACACSKEY** Specify default tacacs+ server key string
- timeout <1-30>** Specify default tacacs+ server timeout value

Default:

Default tacacs+ key is "".

Default tacacs+ timeout is 5 seconds.

Mode:

Global Configuration

Usage Guide:

Use “**tacacs default-config**” command to modify default values of tacacs+ server. These default values will be used when user try to create a new tacacs+ server and not assigned these values.

Example:

This example shows how modify default tacacs+ configuration

```
Switch(config)# tacacs default-config timeout 20
Switch(config)# tacacs default-config key tackey
```

This example shows how to show default tacacs+ configurations.

```
Switch# show tacacs default-config
Timeout | Key
-----+-----
10 | tackey
```

This example shows how to create a new tacacs+ server with above default config and show results.

```
Switch(config)# tacacs host 192.168.1.111
Switch# show tacacs
Prio | Timeout | IP Address | Port | Key
-----+-----+-----+-----+-----
```

```
1 | 10 | 192.168.1.111 | 49 | tackey
```

4.2.8 tacacs host

Command:

```
tacacs host HOSTNAME [port <0-65535>] [key TACPLUSKEY] [priority <0-65535>]
[timeout <1-30>]

no tacacs [host HOSTNAME]
```

Parameter:

host *HOSTNAME* Specify tacacs+ server host name, both IP address and domain name are available.

port <0-65535> Specify tacacs+ server udp port

key *TACPLUSKEY* Specify tacacs+ server key string

priority <0-65535> Specify tacacs+ server priority

timeout <1-30> Specify tacacs+ server timeout value

Default:

Default tacacs+ key is "".

Default tacacs+ timeout is 5 seconds.

Mode:

Global Configuration

Usage Guide:

Use "**tacacs host**" command to add or edit tacacs+ server for authentication, authorization or accounting.

Use no form to delete one or all tacacs+ servers from database.

Example:

This example shows how to create a new tacacs+ server

```
Switch(config)# tacacs host 192.168.1.111 port 12345 key tacacs+ priority 100 timeout
10
```

This example shows how to show existing tacacs+ server.

```
Switch# show tacacs

Prio | Timeout | IP Address | Port | Key
```

```
-----+-----+-----+-----+-----
100 | 10 | 192.168.1.111 | 12345 | tacacs+
```

4.2.9 show tacacs default-config

Command:

```
show tacacs default-config
```

Mode:

Privileged EXEC

Usage Guide:

Use “**show tacacs default-config**” command to show tacacs+ default configurations.

Example:

This example shows how to show default tacacs+ configurations.

```
Switch# show tacacs default-config
Timeout | Key
-----+-----
10 | tackey
```

4.2.10 show tacacs

Command:

```
show tacacs
```

Mode:

Privileged EXEC

Usage Guide:

Use “**show tacacs**” command to show existing tacacs+ servers.

Example:

This example shows how to show existing tacacs+ server.

```
Switch# show tacacs
```

```
Prio | Timeout | IP Address | Port | Key
-----+-----+-----+-----+-----
100 | 10 | 192.168.1.111 | 12345 | tacacs+
```

4.2.11 radius default-config

Command:

```
radius default-config [key RADIUSKEY] [retransmit <1-10>] [timeout <1-30>]
```

Parameter:

- key RADIUSKEY** Specify default radius server key string
- retransmit <1-10>** Specify default radius server retransmit value
- timeout <1-30>** Specify default radius server timeout value

Default:

Default radius key is "".

Default radius retransmit is 3 times.

Default radius timeout is 3 seconds.

Mode:

Global Configuration

Usage Guide:

Use "radius default-config" command to modify default values of radius server. These default values will be used when user try to create a new radius server and not assigned these values.

Example:

This example shows how modify default radius configuration

```
Switch(config)# radius default-config timeout 20
Switch(config)# radius default-config key radiuskey
Switch(config)# radius default-config retransmit 5
```

This example shows how to show default radius configurations.

```
Switch# show radius default-config
Retries| Timeout| Key
-----+-----+-----
```

```
5 | 20 | radiuskey
```

This example shows how to create a new radius server with above default config and show results.

```
Switch(config)# radius host 192.168.1.111
Switch# show radius
Prio | IP Address | Auth-Port| Retries| Timeout| Usage-Type| Key
-----+-----+-----+-----+-----+-----+-----
1 | 192.168.1.111 | 1812 | 5 | 20 | All | radiuskey
```

4.2.12 radius host

Command:

```
radius host HOSTNAME [auth-port <0-65535>] [key RADIUSKEY] [priority
<0-65535>] [retransmit <1-10>] [timeout <1-30>] [type (login|802.1x|all)]

no radius [host HOSTNAME]
```

Parameter:

| | |
|---------------------------------|---|
| host <i>HOSTNAME</i> | Specify radius server host name, both IP address and domain name are available. |
| auth-port | Specify radius server udp port |
| <0-65535> | |
| key <i>RADIUSKEY</i> | Specify radius server key string |
| priority <0-65535> | Specify radius server priority |
| retransmit <1-10> | Specify radius server retransmit times |
| timeout <1-30> | Specify radius server timeout value |
| type | Usage type of this server |
| login | Use for login |
| 802.1X | Use for 802.1x authentication |
| all | Use for both login and 802.1x authentication |

Default:

Default radius key is "".

Default radius timeout is 3 seconds.

Mode:

Global Configuration

Usage Guide:

Use “radius host” command to add or edit an existing radius server.

Use no form to delete one or all radius servers from database.

Example:

This example shows how to create a new radius server

```
Switch(config)# radius host 192.168.1.111 auth-port 12345 key radiuskey priority 100
retransmit 5 timeout 10 type all
```

This example shows how to show existing radius server.

```
Switch# show radius
Prio | IP Address | Auth-Port| Retries| Timeout| Usage-Type| Key
-----+-----+-----+-----+-----+-----+-----
100 | 192.168.1.111 | 12345 | 5 | 10 | All |radiuskey
```

4.2.13 show radius default-config

Command:

```
show radius default-config
```

Mode:

Privileged EXEC

Usage Guide:

Use “show radius default-config” command to show radius default configurations.

Example:

This example shows how to show default radius configurations.

```
Switch# show radius default-config
Retries| Timeout| Key
-----+-----+-----
5 | 20 | radiuskey
```

4.2.14 show radius

Command:

```
show radius
```

Mode:

Privileged EXEC

Usage Guide:

Use “**show radius**” command to show existing radius servers.

Example:

This example shows how to show existing radius server.

```
Switch# show radius
Prio | IP Address | Auth-Port| Retries| Timeout| Usage-Type| Key
-----+-----+-----+-----+-----+-----+-----
100 | 192.168.1.111 | 12345 | 5 | 10 | All |radiuskey
```

4.3 ACL

4.3.1 mac acl

Command:

```
mac acl NAME

no mac acl NAME
```

Parameter:

NAME Specify the name of MAC ACL

Mode:

Global Configuration

Usage Guide:

Use the **mac acl** command to create a MAC access list and to enter mac-acl configuration mode. The name of ACL must be unique that can not have same name with other ACL or QoS policy. Once an ACL is created, an implicit “deny any” ACE created at the end of the ACL. That is, if there are no matches, the packets are denied. Use the no form of this command to delete.

Example:

The example shows how to create a ip acl. You can verify settings by the following show acl command

```
Switch(config)# mac acl test
Switch(mac-acl)# show acl
MAC access list test
```

4.3.2 permit (MAC)

Command:

```
[sequence <1-2147483647>] permit (A:B:C:D:E:F/A:B:C:D:E:F|any)
(A:B:C:D:E:F/A:B:C:D:E:F|any) [vlan <1-4094>] [cos <0-7> <0-7>] [ethertype
<1501-65535>]
no sequence <1-2147483647>
```

Parameter:

- <1-2147483647>** (Optional) Specify sequence index of ACE, the sequence index represent the priority of an ACE in ACL.
- (A:B:C:D:E:F/A:B:C:D:E:F|any)** Specify the source MAC address and mask of packet or any MAC address.
- (A:B:C:D:E:F/A:B:C:D:E:F|any)** Specify the destination MAC address and mask of packet or any MAC address
- [vlan <1-4094>]** (Optional) Specify the vlan ID of packet.
- [cos <0-7> <0-7>]** (Optional) Specify the Class of Service value and mask of packet.
- [ethtype <1501-65535>]** (Optional) Specify Ethernet protocol number of packet

Mode:

MAC ACL Configuration

Usage Guide:

Use the permit command to add permit conditions for a mac ACE that bypass those packets hit the ACE. The “**sequence**” also represents hit priority when ACL bind to an interface. An ACE not specifies “**sequence**” index would assign a sequence index which is the largest existed index plus 20. If packet content can match more than one ACE, the lowest sequence ACE is hit. An ACE can not be added if has the same conditions as existed ACE.

Example:

The example shows how to add an ACE that permit packets with source MAC address 22:33:44:55:66:77 ` VLAN 3 and Ethernet type 1999. You can verify settings by the following **show acl** command

```
Switch(config)# mac acl test
Switch(mac-al)# sequence 999 permit 22:33:44:55:66:77/FF:FF:FF:FF:FF:FF any vlan
3 ethtype 1999
Switch(mac-al)# show acl
MAC access list test
sequence 999 permit 22:33:44:55:66:77/FF:FF:FF:FF:FF:FF any vlan 3 ethtype 1999
```

4.3.3 deny (MAC)

Command:

```
[sequence <1-2147483647>] deny (A:B:C:D:E:F/A:B:C:D:E:F|any)
(A:B:C:D:E:F/A:B:C:D:E:F|any) [vlan <1-4094>] [cos <0-7> <0-7>] [ethtype
<1501-65535>] [shutdown]
```

no sequence <1-2147483647>

Parameter:

- <1-2147483647>** (Optional) Specify sequence index of ACE, the sequence index represent the priority of an ACE in ACL.
- (A:B:C:D:E:F/A:B:C :D:E:F|any)** Specify the source MAC address and mask of packet or any MAC address.
- (A:B:C:D:E:F/A:B:C :D:E:F|any)** Specify the destination MAC address and mask of packet or any MAC address.
- [vlan <1-4094>]** (Optional) Specify the vlan ID of packet.
- [cos <0-7> <0-7>]** (Optional) Specify the Class of Service value and mask of packet.
- [ethtype <1501-65535>]** (Optional) Specify Ethernet protocol number of packet
- [shutdown]** (Optional) Shutdown interface while ACE hit

Mode:

MAC ACL Configuration

Usage Guide:

Use the deny command to add deny conditions for a mac ACE that drop those packets hit the ACE. The “**sequence**” also represents hit priority when ACL bind to an interface. An ACE not specifies “**sequence**” index would assign a sequence index which is the largest existed index plus 20. If packet content can match more than one ACE, the lowest sequence ACE is hit. An ACE can not be added if has the same conditions as existed ACE. Use “**shutdown**” to shutdown interface while ACE hit.

Example:

The example shows how to add an ACE that denies packets with destination MAC address aa:bb:cc:xx:xx:xx and VLAN 9. You can verify settings by the following **show acl** command

```
Switch(config)# mac acl test
Switch(mac-al)# sequence 30 permit any any
Switch(mac-al)# deny any aa:bb:cc:00:00:00/FF:FF:FF:00:00:00 vlan 9 shutdown
Switch(mac-al)# show acl
MAC access list test
sequence 30 permit any any
sequence 50 deny any AA:BB:CC:00:00:00/FF:FF:FF:00:00:00 vlan 9 shutdown
```

4.3.4 ip acl

Command:

```
ip acl NAME

no ip acl NAME
```

Parameter:

NAME Specify the name of IPv4 ACL

Mode:

Global Configuration

Usage Guide:

Use the **ip acl** command to create an IPv4 access list and to enter ip-acl configuration mode. The name of ACL must be unique that can not have same name with other ACL or QoS policy. Once an ACL is created, an implicit “deny any” ACE created at the end of the ACL. That is, if there are no matches, the packets are denied. Use the no form of this command to delete.

Example:

The example shows how to create an IP ACL. You can verify settings by the following show acl command

```
Switch(config)#ip acl iptest
Switch(ip-acl)# show acl
IP access list iptest
```

4.3.5 permit (IP)

Command:

```
[sequence <1-2147483647>] permit (<0-255>|ipinip|egp|igp|hmp|rdp|ipv6|
ipv6:rout|ipv6:frag|rsvp|ipv6:icmp|ospf|pim|l2tp|ip) (A.B.C.D/A.B.C.D|any) (A.B.C.D/A.B.C.D|any)
[[dscp|precedence) VALUE]]
[sequence <1-2147483647>] permit icmp (A.B.C.D/A.B.C.D|any) (A.B.C.D/A.B.C.D|any)
(<0-255>|echo-reply|destination-unreachable|source-quench|echo-request|
router-advertisement|router-solicitation|time-exceeded|timestamp| timestamp-reply|traceroute|any)
(<0-255>|any) [[dscp|precedence) VALUE]]
```

```
[sequence <1-2147483647>] permit tcp (A.B.C.D/A.B.C.D|any) (<0-65535>|echo|
discard|daytime|ftp-data|ftp|telnet|smtp|time|hostname|whois|tacacs-ds|domain|www|
pop2|pop3|syslog|talk|klogin|kshell|sunrpc|drip|PORT_RANGE|any) (A.B.C.D/A.B.C.D|any)
(<0-65535>|echo|discard|daytime|ftp-data|ftp|telnet|smtp|time|hostname|whois|
tacacs-ds|domain|www|pop2|pop3|syslog|talk|klogin|kshell|sunrpc|drip|PORT_RANGE|any)
match-all TCP_FLAG] [(dscp|precedence) VALUE]

[sequence <1-2147483647>] permit udp (A.B.C.D/A.B.C.D|any)
(<0-65535>|echo|discard|time|nameserver|tacacs-ds|domain|bootps|bootpc|tftp|sunrpc|ntp|netbios-n
s|snmp| snmptrap|who|syslog|talk|rip|PORT_RANGE|any) (A.B.C.D/A.B.C.D|any)
(<0-65535>|echo|discard|time|nameserver|tacacs-ds|domain|bootps|bootpc|tftp|sunrpc|ntp|netbios-n
s| snmp|snmptrap|who|syslog|PORT_RANGE|any)[(dscp|precedence) VALUE]

no sequence <1-2147483647>
```

Parameter:

- <1-2147483647>** (Optional) Specify sequence index of ACE, the sequence index represent the priority of an ACE in ACL.
- (A.B.C.D/A.B.C.D|any)** Specify the source IPv4 address and mask of packet or any IPv4 address.
- (A.B.C.D/A.B.C.D|any)** Specify the destination IPv4 address and mask of packet or any IPv4 address.
- [dscp VALUE]** (Optional) Specify the DSCP of packet.
- [precedence VALUE]** (Optional) Specify the IP precedence of packet.
- icmp-type** Specify ICMP message type for filtering ICMP packet. Enter a type name of list or a number of ICMP message type.
- icmp-code** Specify ICMP message code for filtering ICMP packet.
- igmp-type** Specify IGMP type for filtering IGMP packet. Enter a type name of list or a number of IGMP type.
- I4-source-port** Specify TCP/UDP source port of for filtering TCP/UDP packet. Enter a port name of list or a number of TCP/UDP port.
- I4-destination-port** Specify TCP/UDP destination port of for filtering TCP/UDP packet. Enter a port name of list or a number of TCP/UDP port.
- match-all** Specify tcp flag for TCP packet. If a flag should be set it is prefixed by "+" .If a flag should be unset it is prefixed by "-". Available options are +urg, +ack, +psh, +rst, +syn, +fin, -urg, -ack, -psh, -rst, -syn and -fin.To define more than 1 flag - enter additional flags one after another without a space (example +syn-ack).

Mode:

IP ACL Configuration

Usage Guide:

Use the permit command to add permit conditions for an IP ACE that bypass those packets hit the ACE. The “**sequence**” also represents hit priority when ACL bind to an interface. An ACE not specifies “**sequence**” index would assign a sequence index which is the largest existed index plus 20. If packet content can match more than one ACE, the lowest sequence ACE is hit. An ACE can not be added if has the same conditions as existed ACE.

Example:

The example shows how to add a set of ACEs. You can verify settings by the following **show acl** command.

This command shows how to permit a source IP address subnet.

```
Switch(ip-al)# permit ip 192.168.1.0/255.255.255.0
```

This command shows how to permit ICMP echo-request packet with any IP address.

```
Switch(ip-al)# permit icmp any any echo-request any
```

This command shows how to permit any IP address HTTP packets with DSCP 5.

```
Switch(ip-al)# permit tcp any any any www dscp 5
```

This command shows how to permit any source IP address SNMP packet connect to destination IP address 192.168.1.1.

```
Switch(ip-al)# permit udp any any 192.168.1.1/255.255.255.255 snmp
Switch(ip-al)# show acl
IP access list iptest
sequence 1 permit ip 192.168.1.0/255.255.255.0 any
sequence 21 permit icmp any any echo-request any
sequence 41 permit tcp any any any www dscp 5
sequence 61 permit udp any any 192.168.1.1/255.255.255.255 snmp
```

4.3.6 deny (IP)

Command:


```
[sequence <1-2147483647>] deny (<0-255>|ipinip|egp|igp|hmp|rdp|ipv6|
ipv6:rout|ipv6:frag|rsvp|ipv6:icmp|ospf|pim|l2tp|ip) (A.B.C.D/A.B.C.D|any)
(A.B.C.D/A.B.C.D|any) [(dscp|precedence) VALUE]] [shutdown]

[sequence <1-2147483647>] deny icmp (A.B.C.D/A.B.C.D|any) (A.B.C.D/A.B.C.D|any)
(<0-255>|echo-reply|destination-unreachable|
source-quench|echo-request|router-advertisement|router-solicitation|
time-exceeded|timestamp| timestamp-reply|traceroute|any) (<0-255>|any)
[(dscp|precedence) VALUE] [shutdown]

[sequence <1-2147483647>] deny tcp (A.B.C.D/A.B.C.D|any) (<0-65535>|echo|
discard|daytime|ftp-data|ftp|telnet|smtp|time|hostname|whois|tacacs-ds|
domain|www|pop2|pop3|syslog|talk|klogin|kshell|sunrpc|drip|PORT_RANGE|any)
(A.B.C.D/A.B.C.D|any) (<0-65535>|echo|discard|daytime|ftp-data|ftp|telnet|
smtp|time|hostname|whois|tacacs-ds|domain|www|pop2|pop3|syslog|talk|
klogin|kshell|sunrpc|drip|PORT_RANGE|any)
[match-all TCP_FLAG] [(dscp|precedence) VALUE] [shutdown]

[sequence <1-2147483647>] deny udp (A.B.C.D/A.B.C.D|any)
(<0-65535>|echo|discard|time|nameserver|tacacs-ds|domain|bootps|
bootpc|tftp|sunrpc|ntp|netbios-ns|snmp|snmptrap|who|syslog|
talk|rip|PORT_RANGE|any) (A.B.C.D/A.B.C.D|any) (<0-65535>|echo|
discard|time|nameserver|tacacs-ds|domain|bootps|bootpc|tftp|
sunrpc|ntp|netbios-ns|snmp|snmptrap|who|syslog|PORT_RANGE|any)
[(dscp|precedence) VALUE] [shutdown]

no sequence <1-2147483647>
```

Parameter:

- <1-2147483647>** (Optional) Specify sequence index of ACE, the sequence index represent the priority of an ACE in ACL.
- (A.B.C.D/A.B.C.D|any)** Specify the source IPv4 address and mask of packet or any IPv4 address.
- (A.B.C.D/A.B.C.D|any)** Specify the destination IPv4 address and mask of packet or any IPv4 address.
- [dscp VALUE]** (Optional) Specify the DSCP of packet.
- [precedence VALUE]** (Optional) Specify the IP precedence of packet.

| | |
|----------------------------|---|
| icmp-type | Specify ICMP message type for filtering ICMP packet. Enter a type name of list or a number of ICMP message type. |
| icmp-code | Specify ICMP message code for filtering ICMP packet. |
| igmp-type | Specify IGMP type for filtering IGMP packet. Enter a type name of list or a number of IGMP type. |
| I4-source-port | Specify TCP/UDP source port of for filtering TCP/UDP packet. Enter a port name of list or a number of TCP/UDP port. |
| I4-destination-port | Specify TCP/UDP destination port of for filtering TCP/UDP packet. Enter a port name of list or a number of TCP/UDP port. |
| match-all | Specify tcp flag for TCP packet. If a flag should be set it is prefixed by "+" .If a flag should be unset it is prefixed by "-". Available options are +urg, +ack, +psh, +rst, +syn, +fin, -urg, -ack, -psh, -rst, -syn and -fin. To define more than 1 flag - enter additional flags one after another without a space (example +syn-ack). |
| [shutdown] | (Optional) Shutdown interface while ACE hit |

Mode:

IP ACL Configuration

Usage Guide:

Use the deny command to add deny conditions for an IP ACE that drop those packets hit the ACE. The “**sequence**” also represents hit priority when ACL bind to an interface. An ACE not specifies “**sequence**” index would assign a sequence index which is the largest existed index plus 20. If packet content can match more than one ACE, the lowest sequence ACE is hit. An ACE can not be added if has the same conditions as existed ACE. Use “**shutdown**” to shutdown interface while ACE hit.

Example:

The example shows how to add an ACE that denies packets with source IP address 192.168.1.80. You can verify settings by the following **show acl** command

```
Switch(config)# ip acl iptest
Switch(ip-al)# deny ip 192.168.1.80/255.255.255.255 any
Switch(ip-al)# show acl
IP access list iptest
sequence 1 deny ip 192.168.1.80/255.255.255.255 any
```

4.3.7 ipv6 acl

Command:

```

ipv6 acl NAME

no ipv6 acl NAME

```

Parameter:

NAME Specify the name of IPv6 ACL

Mode:

Global Configuration

Usage Guide:

Use the **ipv6 acl** command to create an IPv6 access list and to enter ipv6-acl configuration mode. The name of ACL must be unique that can not have same name with other ACL or QoS policy. Once an ACL is created, an implicit “deny any” ACE created at the end of the ACL. That is, if there are no matches, the packets are denied. Use the no form of this command to delete.

Example:

The example shows how to create an IPv6 ACL. You can verify settings by the following show acl command

```

Switch(config)#ipv6 acl ipv6test
Switch(ipv6-acl)# show acl
IPv6 access list iptest

```

4.3.8 permit (IPv6)

Command:

```

[sequence <1-2147483647>] permit (<0-255>|ipv6) (X::X:X/<0-128>|any)
(X::X:X/<0-128>|any) [(dscp|precedence) VALUE]

[sequence <1-2147483647>] permit icmp (X::X:X/<0-128>|any)
(X::X:X/<0-128>|any) (<0-255>|destination-unreachable|packet-too-big|
time-exceeded|parameter-problem|echo-request|echo-reply|
mld-query|mld-report|mldv2-report|mld-done|
router-solicitation|router-advertisement|nd-ns|nd-na|any)
(<0-255>|any)[(dscp|precedence) VALUE]

[sequence <1-2147483647>] permit tcp (X::X:X/<0-128>|any)


```

```

(<0-65535>|echo|discard|daytime|ftp-data|ftp|telnet|smtp|
time|hostname|whois|tacacs-ds|domain|www|pop2|pop3|syslog|
talk|klogin|kshell|sunrpc|drip|PORT_RANGE|any) (X:X::X:X/<0-128>|any)
(<0-65535>|echo|discard|daytime|ftp-data|ftp|
telnet|smtp|time|hostname|whois|tacacs-ds|domain|www|pop2|
pop3|syslog|talk|klogin|kshell|sunrpc|drip|PORT_RANGE|any) [match-all
TCP_FLAG] [(dscp|precedence) VALUE]

[sequence <1-2147483647>] permit udp (X:X::X:X/<0-128>|any)
(<0-65535>|echo|discard|time|nameserver|tacacs-ds|domain|
bootps|bootpc|tftp|sunrpc|ntp|netbios-ns|snmp|snmptrap|who|syslog|
talk|rip|PORT_RANGE|any) (X:X::X:X/<0-128>|any)
(<0-65535>|echo|discard|time|nameserver|tacacs-ds|domain|
bootps|bootpc|tftp|sunrpc|ntp|netbios-ns|
snmp|snmptrap|who|syslog|PORT_RANGE|any) [(dscp|precedence) VALUE]

no sequence <1-2147483647>

```

Parameter:

- <1-2147483647>** (Optional) Specify sequence index of ACE, the sequence index represent the priority of an ACE in ACL.
- (X:X::X:X/<0-128>|any)** Specify the source IPv6 address and prefix of packet or any IPv6 address.
- (X:X::X:X/<0-128>|any)** Specify the destination IPv6 address and prefix of packet or any IPv6 address.
- [dscp VALUE]** (Optional) Specify the DSCP of packet.
- [precedence VALUE]** (Optional) Specify the IP precedence of packet.
- icmp-type** Specify ICMP message type for filtering ICMP packet. Enter a type name of list or a number of ICMP message type.
- icmp-code** Specify ICMP message code for filtering ICMP packet.
- I4-source-port** Specify TCP/UDP source port of for filtering TCP/UDP packet. Enter a port name of list or a number of TCP/UDP port.
- I4-destination-port** Specify TCP/UDP destination port of for filtering TCP/UDP packet. Enter a port name of list or a number of TCP/UDP port.
- match-all** Specify tcp flag for TCP packet. If a flag should be set it is prefixed by "+". If a flag should be unset it is prefixed by "-". Available options are +urg, +ack, +psh, +rst, +syn, +fin, -urg, -ack, -psh, -rst, -syn and -fin. To define more than 1 flag - enter additional

flags one after another without a space (example +syn-ack).

Mode:

IPv6 ACL Configuration

Usage Guide:

Use the permit command to add permit conditions for an IPv6 ACE that bypass those packets hit the ACE. The “**sequence**” also represents hit priority when ACL bind to an interface. An ACE not specifies “**sequence**” index would assign a sequence index which is the largest existed index plus 20. If packet content can match more than one ACE, the lowest sequence ACE is hit. An ACE can not be added if has the same conditions as existed ACE.

Example:

The example shows how to add a set of ACEs. You can verify settings by the following show acl command. This command shows how to permit a source IP address subnet.

```
Switch(ipv6-al)# permit permit ipv6 fe80:1122:3344:5566::1/64 any
Switch(ipv6-al)# show acl
IPv6 access list ipv6test
sequence 1 permit ipv6 fe80:1122:3344:5566::1/64 any
```

4.3.9 deny (IPv6)

Command:

```
[sequence <1-2147483647>] deny (<0-255>|ipv6) (X::X:X/<0-128>|any)
(X::X:X/X/<0-128>|any) [(dscp|precedence) VALUE] [shutdown]

[sequence <1-2147483647>] deny icmp (X::X:X/X/<0-128>|any)
(X::X:X/X/<0-128>|any) (<0-255>|destination-unreachable|packet-too-big|
time-exceeded|parameter-problem|echo-request|echo-reply|
mld-query|mld-report|mldv2-report|mld-done|
router-solicitation|router-advertisement|nd-ns|nd-na|any)
(<0-255>|any)[(dscp|precedence) VALUE] [shutdown]

[sequence <1-2147483647>] deny tcp (X::X:X/X/<0-128>|any)
(<0-65535>|echo|discard|daytime|ftp-data|ftp|telnet|smtp|
time|hostname|whois|tacacs-ds|domain|www|pop2|pop3|syslog|
talk|klogin|kshell|sunrpc|drip|PORT_RANGE|any) (X::X:X/X/<0-128>|any)
(<0-65535>|echo|discard|daytime|ftp-data|ftp|
```

```

telnet|smtp|time|hostname|whois|tacacs-ds|domain|www|pop2|
pop3|syslog|talk|klogin|kshell|sunrpc|drip|PORT_RANGE|any) [match-all
TCP_FLAG] [(dscp|precedence) VALUE] [shutdown]

[sequence <1-2147483647>] deny udp (X:X::X:X/<0-128>|any)
(<0-65535>|echo|discard|time|nameserver|tacacs-ds|domain|
bootps|bootpc|tftp|sunrpc|ntp|netbios-ns|snmp|snmptrap|who|syslog|
talk|rip|PORT_RANGE|any) (X:X::X:X/<0-128>|any)
(<0-65535>|echo|discard|time|nameserver|tacacs-ds|domain|
bootps|bootpc|tftp|sunrpc|ntp|netbios-ns|
snmp|snmptrap|who|syslog|PORT_RANGE|any) [(dscp|precedence) VALUE]
[shutdown]

no sequence <1-2147483647>

```

Parameter:

- <1-2147483647>** (Optional) Specify sequence index of ACE, the sequence index represent the priority of an ACE in ACL.
- (A.B.C.D/A.B.C.D|any)** Specify the source IPv4 address and mask of packet or any IPv4 address.
- (A.B.C.D/A.B.C.D|any)** Specify the destination IPv4 address and mask of packet or any IPv4 address.
- [dscp VALUE]** (Optional) Specify the DSCP of packet.
- [precedence VALUE]** (Optional) Specify the IP precedence of packet.
- icmp-type** Specify ICMP message type for filtering ICMP packet. Enter a type name of list or a number of ICMP message type.
- icmp-code** Specify ICMP message code for filtering ICMP packet.
- igmp-type** Specify IGMP type for filtering IGMP packet. Enter a type name of list or a number of IGMP type.
- I4-source-port** Specify TCP/UDP source port of for filtering TCP/UDP packet. Enter a port name of list or a number of TCP/UDP port.
- I4-destination-port** Specify TCP/UDP destination port of for filtering TCP/UDP packet. Enter a port name of list or a number of TCP/UDP port.
- match-all** Specify tcp flag for TCP packet. If a flag should be set it is prefixed by "+" .If a flag should be unset it is prefixed by "-". Available options are +urg, +ack, +psh, +rst, +syn, +fin, -urg, -ack, -psh, -rst, -syn and -fin. To define more than 1 flag - enter additional flags one after another without a space (example +syn-ack).

[shutdown] (Optional) Shutdown interface while ACE hit

Mode:

IP ACL Configuration

Usage Guide:

Use the deny command to add deny conditions for an IPv6 ACE that drop those packets hit the ACE. The “**sequence**” also represents hit priority when ACL bind to an interface. An ACE not specifies “**sequence**” index would assign a sequence index which is the largest existed index plus 20. If packet content can match more than one ACE, the lowest sequence ACE is hit. An ACE can not be added if has the same conditions as existed ACE. Use “**shutdown**” to shutdown interface while ACE hit.

Example:

The example shows how to add an ACE that denies packets with destination IP address fe80::abcd. You can verify settings by the following **show acl** command

```
Switch334455(config)# ipv6 acl ipv6test
Switch334455(ip-al)# deny ipv6 any fe80::abcd/128
Switch334455(ip-al)# show acl
IPv6 access list ipv6test
sequence 1 deny ipv6 any fe80::abcd/128
```

4.3.10 bind acl

Command:

```
(mac|ip|ipv6) acl NAME

[no] (mac|ip|ipv6) acl NAME
```

Parameter:

- (mac|ip|ipv6)** Specify a type of ACL to binding to interface
- NAME** Specify the name of ACL

Mode:

Global Configuration
Context Configuration

Usage Guide:

Use the **show acl** command to show created ACLs. You can specify mac、ip or ipv6 to show specific type ACL or

specify unique name string to show ACL with the name.

Example:

The example shows how to show all IP ACL.

```
Switch(config)# show ip acl
IP access list iptest
sequence 1 deny ip 192.168.1.80/255.255.255.255 any
```

4.3.11 show acl utilization

Command:

```
show all utilization
```

Mode:

Global Configuration

Usage Guide:

Use the **show acl utilization** command to show the usage of PIE of ASIC. When a ACL bind to interface, it needs ASIC PIE resource to help to filter packet. An ASIC has limited PIE resource. This command help user to know the PIE usage of AISC.

Example:

The example shows how to show PIE utilization

```
Switch(config)# show acl utilization
Group Index : 1
Group Assign to : Mac-based ACL and IPv4-based ACL
Group Maximun ACEs : 128
Group Remain ACEs : 125
Group Used ACEs : 3
ACEs Used by ACL : 3
ACEs Used by QoS : 0
-----
Group Index : 2
Group Assign to : None
Group Maximun ACEs : 128
Group Remain ACEs : 128
```


Group Used ACEs : 0

ACEs Used by ACL : 0

ACEs Used by QoS : 0

Group Index : 3

Group Assign to : None

Group Maximun ACEs : 128

Group Remain ACEs : 128

Group Used ACEs : 0

ACEs Used by ACL : 0

ACEs Used by QoS : 0

Group Index : 4

Group Assign to : None

Group Maximun ACEs : 128

Group Remain ACEs : 128

Group Used ACEs : 0

ACEs Used by ACL : 0

ACEs Used by QoS : 0

4.4 Administration

4.4.1 enable

Command:

```
enable [<1-15>]
```

```
disable [<1-14>]
```

Parameter:

<1-15> Specify privileged level to enable

<1-14> Specify privileged level to enable

Default:

Default privilege level is 15 if no privilege level is specified on enable command.

Default privilege level is 1 if no privilege level is specified on disable command.

Mode:

User EXEC

Usage Guide:

In User EXEC mode, user only allows to do a few actions. Most of commands are only available in privileged EXEC mode. Use “**enable**” command to enter the privileged mode to do more actions on switch.

In privileged EXEC mode, use “**exit**” command is able to go back to user EXEC mode with original user privilege level.

If you need to go back to user EXEC mode with different privilege level, use “**disable**” command to specify the privilege level you need.

In privileged EXEC mode, the prompt will show “**Switch#**”

Example:

This example shows how to enter privileged EXEC mode and show current privilege level.

```
Switch> enable
Switch# show privilege
Current CLI Username:
Current CLI Privilege: 15
```

This example show how to enter user EXEC mode with privilege 3.

```
Switch# disable 3
```

```
Switch> show privilege  
Current CLI Username:  
Current CLI Privilege: 3
```

4.4.2 exit

Command:

```
exit
```

Mode:

User EXEC
Privileged EXEC
Global Configuration
Interface Configuration
Line Configuration
.....

Usage Guide:

In User EXEC mode, “**exit**” command will close current CLI session. In other modes, “**exit**” command will go to the parent mode. And every mode has the “**exit**” command.

Example:

This example shows how to enter privileged EXEC mode and use exit command to go back to user EXEC mode.

```
Switch> enable  
Switch# exit  
Switch>
```

4.4.3 configure

Command:

```
configure
```

Mode:

Privileged EXEC

Usage Guide:

Use “**configure**” command to enter global configuration mode. In global configuration mode, the prompt will show as “**Switch(config)#**”.

Example:

This example shows how to enter global configuration mode.

```
Switch# configure
Switch(config)#
```

4.4.4 interface

Command:

```
interface IF_PORTS

interface range IF_PORTS
```

Parameter:

IF_PORTS Specify the port to select. This parameter allows partial port name and ignore case. For Example:
 Gigabit4

 If port range is specified, the list format is also available. For Example:
 gi1-3

Mode:

Global Configuration

Usage Guide:

Some configurations are port based. In order to configure these configurations, we need to enter Interface Configuration mode to configure them. Use “**interface**” command to enter the Interface Configuration mode and select the port to be configured.

In Interface Configuration mode, the prompt will show as “**Switch(config-if)#**”

Example:

This example shows how to enter Interface Configuration mode

```
Switch> enable
Switch# exit
Switch>
Switch# configure
Switch(config)# interface gi1
Switch(config-if)#
```

4.4.5 line

Command:

```
line ( console | telnet | ssh )
```

Parameter:

| | |
|----------------|-----------------------------------|
| console | Select console line to configure. |
| telnet | Select telnet line to configure. |
| ssh | Select ssh line to configure. |

Mode:

Global Configuration

Usage Guide:

Some configurations are line based. In order to configure these configurations, we need to enter Line Configuration mode to configure them. Use “**line**” command to enter the Line Configuration mode and select the line to be configured.

In Line Configuration mode, the prompt will show as “**Switch(config-line)#**”

Example:

This example shows how to enter Interface Configuration mode

```
Switch# configure
Switch(config)# line console
Switch(config-line)#
```

4.4.6 end

Command:

```
end
```

Mode:

Privileged EXEC
Global Configuration
Interface Configuration
Line Configuration
.....

Usage Guide:

Use “**end**” command to return to privileged EXEC mode directly. Every mode except User EXEC mode has the “end” command.

Example:

This example shows how to enter Interface Configuration mode and use end command to go back to privileged EXEC mode

```
Switch# configure  
Switch(config)# interface gi1  
Switch(config-if)# end  
Switch#
```

4.4.7 reboot

Command:

```
reboot
```

Mode:

Privileged EXEC

Usage Guide:

Use “**reboot**” command to make system hot restart.

Example:

This example shows how to restart the system

```
Switch# reboot
```

4.4.8 system name

Command:

```
system name NAME
```

Parameter:

NAME Specify system name string.

Mode:

Global Configuration

Usage Guide:

Use “**system name**” command to modify system name information of the switch. The system name is also used to be CLI prompt.

Example:

This example shows how to modify contact information

```
Switch(config)# system name myname
myname(config)#
```

This example shows how to show system name information

```
Switch# show info
System Name : myname
System Location : Default Location
System Contact : Default Contact
MAC Address : 00:30:4F:EF:01:02
IP Address : 192.168.0.100
Subnet Mask : 255.255.255.0
Loader Version : 1.3.0.26225
Loader Date : Thu May 17 15:19:42 CST 2012
Firmware Version : 2.5.0-beta.32811
Firmware Date : Mon Sep 24 19:33:42 CST 2012
System Object ID : 1.3.6.1.4.1.27282.3.2.10
System Up Time : 0 days, 0 hours, 2 mins, 37 secs
```

4.4.9 system contact

Command:

```
system contact CONTACT
```

Parameter:

CONTACT Specify contact string.

Mode:

Global Configuration

Usage Guide:

Use “**system contact**” command to modify contact information of the switch.

Example:

This example shows how to modify contact information

```
Switch(config)# system contact callme
```

This example shows how to show system contact information

```
Switch(config)# system contact callme
Switch# show info
System Name : Switch
System Location : Default Location
System Contact : callme
MAC Address : 00:30:4F:EF:01:02
IP Address : 192.168.0.100
Subnet Mask : 255.255.255.0
Loader Version : 1.3.0.26225
Loader Date : Thu May 17 15:19:42 CST 2012
Firmware Version : 2.5.0-beta.32811
Firmware Date : Mon Sep 24 19:33:42 CST 2012
System Object ID : 1.3.6.1.4.1.27282.3.2.10
System Up Time : 0 days, 0 hours, 2 mins, 37 secs
```


4.4.10 system location

Command:

```
system location LOCATION
```

Parameter:

LOCATION Specify location string.

Mode:

Global Configuration

Usage Guide:

Use “**system location**” command to modify location information of the switch.

Example:

This example shows how to modify location information

```
Switch(config)# system location home
```

This example shows how to show system location information

```
Switch(config)# system location home
Switch# show info
System Name : SwitchEF0102
System Location : home
System Contact : Default Contact
MAC Address : 00:30:4f:EF:01:02
IP Address : 192.168.0.100
Subnet Mask : 255.255.255.0
Loader Version : 1.3.0.26225
Loader Date : Thu May 17 15:19:42 CST 2012
Firmware Version : 2.5.0-beta.32811
Firmware Date : Mon Sep 24 19:33:42 CST 2012
System Object ID : 1.3.6.1.4.1.27282.3.2.10
System Up Time : 0 days, 0 hours, 2 mins, 37 secs
```

4.4.11 username

Command:

```
username WORD<0-32> [privilege (admin | user | <0-15>)] (password | secret)
WORD<0-32>

no username WORD<0-32>
```

Parameter:

| | |
|-------------------------------|--|
| username | Specify user name to add/delete/edit. |
| WORD<0-32> | |
| privilege admin | Specify privilege level to be admin (privilege 15) |
| privilege user | Specify privilege level to be user (privilege 1) |
| privilege <0-15> | Specify custom privilege level |
| password | Specify password string and make it not encrypted. |
| WORD<0-32> | |

Default:

Default username "" has password "" with privilege 1.

Default username "admin" has password "admin" with privilege 15.

Mode:

Global Configuration

Usage Guide:

Use "**username**" command to add a new user account or edit an existing user account. And use "**no username**" to delete an existing user account. The user account is a local database for login authentication.

Example:

This example shows how to add a new user account.

```
Switch(config)# username test secret passwd
```

This example shows how to show existing user accounts.

```
Switch# show username
Priv | Type | User Name | Password
-----+-----+-----+-----
01 | secret | | dnXencJRwfIV6
15 | secret | admin | FzjrGO6vfbERY
```

```
15 | secret | test | 7p57T9yMkViSUS
```

4.4.12 enable password

Command:

```
enable [privilege <0-15>] (password | secret) WORD<0-32>
```

```
no enable [privilege <0-15>]
```

Parameter:

| | |
|-------------------------------|--|
| privilege <0-15> | Specify the privilege level to configure. If no privilege level is specified, default is 15. |
| password | Specify password string and make it not encrypted. |
| WORD<0-32> | |
| secret | Specify password string and make it encrypted. |
| WORD<0-32> | |

Default:

Default enable password for all privilege levels are "".

Mode:

Global Configuration

Usage Guide:

Use "**enable password**" command to edit password for each privilege level for enable authentication. And use "**no enable**" command to restore enable password to default empty value.

The only way to show this configuration is using "**show running-config**" command.

Example:

This example shows how to edit enable password for privilege level 15

```
Switch(config)# enable secret enblpasswd
```

4.4.13 ip address

Command:

```
ip address A.B.C.D [mask A.B.C.D]
```

Parameter:

address A.B.C.D Specify IPv4 address for switch
mask A.B.C.D Specify net mask address for switch

Default:

Default IP address is 192.168.0.100 and default net mask is 255.255.255.0.

Mode:

Global Configuration

Usage Guide:

Use “**ip address**” command to modify administration ipv4 address. This address is very important. When we try to use telnet, ssh, http, https, snmp... to connect to the switch, we need to use this ip address to access it.

Example:

This example shows how to modify the ipv4 address of the switch.

```
Switch(config)# ip address 192.168.1.200 mask 255.255.255.0
```

This example shows how to show current ipv4 address of the switch.

```
Switch# show ip
IP Address: 192.168.1.200
Subnet Netmask: 255.255.255.0
Default Gateway: 192.168.1.254
```

4.4.14 ip default-gateway

Command:

```
ip default-gateway A.B.C.D

no ip default-gateway
```

Parameter:

A.B.C.D Specify default gateway IPv4 address for switch

Default:

Default IP address of default gateway is 192.168.1.254.

Mode:

Global Configuration

Usage Guide:

Use “**ip default-gateway**” command to modify default gateway address. And use “**no ip default-gateway**” to restore default gateway address to factory default.

Example:

This example shows how to modify the ipv4 address of the switch.

```
Switch(config)# ip default-gateway 192.168.1.100
```

This example shows how to show current ipv4 default gateway of the switch.

```
Switch# show ip
IP Address: 192.168.1.1
Subnet Netmask: 255.255.255.0
Default Gateway: 192.168.1.100
```

4.4.15 ip dns

Command:

```
ip dns A.B.C.D [A.B.C.D]

no ip dns [A.B.C.D]
```

Parameter:

A.B.C.D Specify the DNS server ip address.

Default:

Default IP address of DNS server is 168.95.1.1 and 168.95.192.1.

Mode:

Global Configuration

Usage Guide:

Use “**ip dns**” command to modify DNS server address. And use “**no ip dns**” to delete existing DNS server.

Example:

This example shows how to modify the DNS server of the switch.

```
Switch(config)# ip dns 111.111.111.111 222.222.222.222
```

This example shows how to show current DNS server of the switch.

```
Switch# show ip dns
DNS Server 1 : 111.111.111.111
DNS Server 2 : 222.222.222.222
```

4.4.16 ip dhcp

Command:

```
ip dhcp
no ip dhcp
```

Default:

Default DHCP client is disabled.

Mode:

Global Configuration

Usage Guide:

Use “**ip dhcp**” command to enabled dhcp client to get IP address from remote DHCP server.

Use “**no ip dhcp**” command to disabled dhcp client and use static ip address.

Example:

This example shows how to enable dhcp client.

```
Switch(config)# ip dhcp
```

This example shows how to show current dhcp client state of the switch.

```
Switch# show ip dhcp
DHCP Status : enabled
```

4.4.17 ipv6 autoconfig

Command:

```
ipv6 autoconfig
no ipv6 autoconfig
```

Default:

Default IPv6 auto config is enabled.

Mode:

Global Configuration

Usage Guide:

Use “**ipv6 autoconfig**” command to enabled IPv6 auto configuration feature.

Use “**no ipv6 autoconfig**” command to disabled IPv6 auto configuration feature.

Example:

This example shows how to disable IPv6 auto config.

```
Switch(config)# no ipv6 autoconfig
```

This example shows how to show current IPv6 auto config state.

```
Switch# show ipv6
IPv6 DHCP Configuration : Disabled
IPv6 DHCP DUID :
IPv6 Auto Configuration : Disabled
IPv6 Link Local Address : fe80::dcad:beff:feef:102/64
IPv6 static Address : fe80::20e:2eff:fef1:4b3c/128
IPv6 static Gateway Address : ::
IPv6 in use Address : fe80::dcad:beff:feef:102/64
IPv6 in use Gateway Address : ::
```

4.4.18 ipv6 address

Command:

```
ipv6 address X:X::X:X prefix <0-128>
```

Parameter:

address X:X::X:X Specify IPv6 address for switch
prefix <0-128> Specify IPv6 prefix length for switch

Mode:

Global Configuration

Usage Guide:

Use “**ipv6 address**” command to specify static IPv6 address.

Example:

This example shows how to add static ipv6 address of the switch.

```
Switch(config)# ipv6 address fe80::20e:2eff:fef1:4b3c prefix 128
```

This example shows how to show current ipv6 address of the switch.

```
Switch# show ipv6
IPv6 DHCP Configuration : Disabled
IPv6 DHCP DUID :
IPv6 Auto Configuration : Enabled
IPv6 Link Local Address : fe80::dcad:beff:feef:102/64
IPv6 static Address : fe80::20e:2eff:fef1:4b3c/128
IPv6 static Gateway Address : ::
IPv6 in use Address : fe80::dcad:beff:feef:102/64
IPv6 in use Gateway Address : ::
```

4.4.19 ipv6 default-gateway

Command:

```
ipv6 default-gateway X:X::X:X
```

Parameter:

X:X::X:X Specify default gateway IPv6 address for switch

Mode:

Global Configuration

Usage Guide:

Use “**ipv6 default-gateway**” command to modify default gateway IPv6 address.

Example:

This example shows how to modify the ipv6 default gateway address of the switch.

```
Switch(config)# ipv6 default-gateway fe80::dcad:beff:feef:103
Switch# show ipv6
IPv6 DHCP Configuration : Disabled
IPv6 DHCP DUID :
IPv6 Auto Configuration : Enabled
IPv6 Link Local Address : fe80::dcad:beff:feef:102/64
IPv6 static Address : fe80::20e:2eff:fef1:4b3c/128
IPv6 static Gateway Address : ::
IPv6 in use Address : fe80::dcad:beff:feef:102/64
IPv6 in use Gateway Address : ::
```

4.4.20 ipv6 dhcp

Command:

```
ipv6 dhcp
no ipv6 dhcp
```

Default:

Default DHCPv6 client is disabled.

Mode:

Global Configuration

Usage Guide:

Use “**ipv6 dhcp**” command to enabled dhcpv6 client to get IP address from remote DHCPv6 server.

Use “**no ipv6 dhcp**” command to disabled dhcpv6 client and use static ipv6 address or ipv6 auto config address.

Example:

This example shows how to enable dhcp client.

```
Switch(config)# ipv6 dhcp
```

This example shows how to show current dhcpv6 client state of the switch.

```
Switch# show ipv6 dhcp
DHCPv6 Status : enabled
```

4.4.21 ip service

Command:

```
ip (telnet | ssh | http | https)

no ip (telnet | ssh | http | https)
```

Parameter:

| | |
|---------------|-------------------------------|
| telnet | Enable/Disable telnet service |
| Ssh | Enable/Disable ssh service |
| http | Enable/Disable http service |
| https | Enable/Disable https service |

Default:

Default telnet service is disabled.

Default ssh service is disabled.

Default http service is enabled.

Default https service is disabled.

Mode:

Global Configuration

Usage Guide:

Use “**ip service**” command to enable all kinds of ip services. Such as telnet, ssh, http and https.

Use no form to disable service.

Example:

This example shows how to enable telnet service and show current telnet service status.

```
Switch(config)# ip telnet
Telnetd daemon enabled.
```

```
Switch(config)# exit
Switch# show line telnet
Telnet =====
Telnet Server : enabled
Session Timeout : 10 (minutes)
History Count : 128
Password Retry : 3
Silent Time : 0 (seconds)
```

This example shows how to enable https service and show current https service status.

```
Switch(config)# ip https
Switch(config)# exit
Switch# show ip https
HTTPS daemon : enabled
Session Timeout : 10 (minutes)
```

4.4.22 ip session-timeout

Command:

```
ip (http | https) session-timeout <0-86400>
```

Parameter:

| | |
|------------------------|--|
| http | Specify session timeout for http service. |
| https | Specify session timeout for https service. |
| <0-86400> | Specify session timeout minutes. 0 means never timeout |

Default:

Default session timeout for http and https is 10 minutes.

Mode:

Global Configuration

Usage Guide:

Use “**ip session-timeout**” command to specify the session timeout value for http or https service. When user login into WEBUI and do not do any action after session timeout will be logged out.

Example:

This example shows how to change http session timeout to 15min and https session timeout to 20min

```
Switch(config)# ip http session-timeout 15
Switch(config)# ip https session-timeout 20
```

This example shows how to enable https service and show current https service status.

```
Switch# show ip http
HTTPS daemon : enabled
Session Timeout : 15 (minutes)
Switch# show ip https
HTTPS daemon : disabled
Session Timeout : 20 (minutes)
```

4.4.23 exec-timeout

Command:

```
exec-timeout <0-65535>
```

Parameter:

<0-65535> Specify session timeout minutes. 0 means never timeout

Default:

Default session timeout for all lines are 10 minutes.

Mode:

line Configuration

Usage Guide:

Use “**exec-timeout**” command to specify the session timeout value for CLI running on console, telnet or ssh service.

When user login into CLI and do not do any action after session timeout will be logged out from the CLI session.

Example:

This example shows how to change console session timeout to 15min ,telnet session timeout to 20min and ssh session timeout to 25min.

```
Switch(config)# line console
Switch(config-line)# exec-timeout 15
Switch(config-line)# exit
```

```
Switch(config)# line telnet
Switch(config-line)# exec-timeout 20
Switch(config-line)# exit
Switch(config)# line ssh
Switch(config-line)# exec-timeout 25
Switch(config-line)# exit
```

This example shows how show line information.

```
Switch# show line
Console =====
Session Timeout : 15 (minutes)
History Count : 128
Password Retry : 3
Silent Time : 0 (seconds)
Telnet =====
Telnet Server : disabled
Session Timeout : 20 (minutes)
History Count : 128
Password Retry : 3
Silent Time : 0 (seconds)
SSH =====
SSH Server : disabled
Session Timeout : 25 (minutes)
History Count : 128
Password Retry : 3
Silent Time : 0 (seconds)
```

4.4.24 password-thresh

Command:

```
password-thresh <0-120>
```

Parameter:

<0-120>

Specify password fail retry number. 0 means no limit.

Default:

Default password fail retry number is 3.

Mode:

line Configuration

Usage Guide:

Use “**password-thresh**” command to specify the password fail retry number for CLI running on console, telnet or ssh service. When user input password to login and authenticate failed, the fail retry number will increase one. After fail retry number exceed configured one, the CLI will block login for the period of silent time which configured by the command “**silent-time**”.

Example:

This example shows how to change console fail retry number to 4, telnet fail retry number to 5 and ssh fail retry number to 6.

```
Switch(config)# line console
Switch(config-line)# password-thresh 4
Switch(config-line)# exit
Switch(config)# line telnet
Switch(config-line)# password-thresh 5
Switch(config-line)# exit
Switch(config)# line ssh
Switch(config-line)# password-thresh 6
Switch(config-line)# exit
```

This example shows how show line information.

```
Switch# show line
Console =====
Session Timeout : 10 (minutes)
History Count : 128
Password Retry : 4
Silent Time : 0 (seconds)
Telnet =====
Telnet Server : disabled
Session Timeout : 10 (minutes)
History Count : 128
Password Retry : 5
Silent Time : 0 (seconds)
```

```
SSH =====
SSH Server : disabled
Session Timeout : 10 (minutes)
History Count : 128
Password Retry : 6
Silent Time : 0 (seconds)
```

4.4.25 silent-time

Command:

```
silent-time <0-65535>
```

Parameter:

<0-65535> Specify silent time with unit seconds. 0 means do not silent.

Default:

Default silent time is 0.

Mode:

line Configuration

Usage Guide:

Use “**silent time**” command to specify the silent time for CLI running on console, telnet or ssh service. When user input password to login and authenticate failed, the fail retry number will increase one. After fail retry number exceed configured one, the CLI will block login for the period of silent time which configured by the command “**silent-time**”.

Example:

This example shows how to change console silent time to 10, telnet silent time to 15 and ssh silent time to 20.

```
Switch(config)# line console
Switch(config-line)# silent-time 10
Switch(config-line)# exit
Switch(config)# line telnet
Switch(config-line)# silent-time 15
Switch(config-line)# exit
Switch(config)# line ssh
Switch(config-line)# silent-time 20
Switch(config-line)# exit
```

This example shows how show line information.

```
Switch# show line
Console =====
Session Timeout : 10 (minutes)
History Count : 128
Password Retry : 3
Silent Time : 10 (seconds)
Telnet =====
Telnet Server : disabled
Session Timeout : 10 (minutes)
History Count : 128
Password Retry : 3
Silent Time : 15 (seconds)
SSH =====
SSH Server : disabled
Session Timeout : 10 (minutes)
History Count : 128
Password Retry : 3
Silent Time : 20 (seconds)
```

4.4.26 history

Command:

```
history <1-256>

no history
```

Parameter:

<1-256> Specify maximum CLI history entry number.

Default:

Default maximum history entry number is 128.

Mode:

line Configuration

Usage Guide:

Use “**history**” command to specify the maximum commands history number for CLI running on console, telnet or ssh service. Every command input by user will record in history buffer. If all history commands exceed configured history number, older ones will be deleted from buffer.

Use “**no history**” to disable the history feature. And use “**show history**” to show all history commands.

Example:

This example shows how to change console history number to 100, telnet history number to 150 and ssh history number to 200.

```
Switch(config)# line console
Switch(config-line)# history 100
Switch(config-line)# exit
Switch(config)# line telnet
Switch(config-line)# history 150
Switch(config-line)# exit
Switch(config)# line ssh
Switch(config-line)# history 200
Switch(config-line)# exit
```

This example shows how show line information.

```
Switch# show line
Console =====
Session Timeout : 10 (minutes)
History Count : 100
Password Retry : 3
Silent Time : 0 (seconds)
Telnet =====
Telnet Server : disabled
Session Timeout : 10 (minutes)
History Count : 150
Password Retry : 3
Silent Time : 0 (seconds)
SSH =====
SSH Server : disabled
Session Timeout : 10 (minutes)
History Count : 200
Password Retry : 3
```

```
Silent Time : 0 (seconds)
```

This example shows how show history commands.

```
Switch# show history
```

```
Maximun History Count: 100
```

- ```

1. enable
2. configure
3. line console
4. exit
5. show history
6. line
7. exit
8. show history
9. configure
10. line
11. line console
12. exit
13. line console
14. history 100
15. exit
16. show history
17. exit
18. show history
```

## 4.4.27 clear service

Command:

```
clear (telnet | ssh)
```

Parameter:

- |               |                            |
|---------------|----------------------------|
| <b>telnet</b> | Clear all telnet sessions. |
| <b>ssh</b>    | Clear all ssh sessions.    |

**Mode:**

Privileged EXEC

**Usage Guide:**

Use “**clear service**” command to kill all existing sessions for the select service.

**Example:**

This example shows how to enable telnet service and show current telnet service status.

```
Switch# clear telnet
```

## 4.4.28 ssl

**Command:**

```
ssl
```

**Mode:**

Global Configuration

**Usage Guide:**

Use “ssl” command to generate security certificate files such as RSA, DSA.

**Example:**

This example shows how to generate certificate files.

```
Switch(config)# ssl
```

This example shows how to show the certificate file lists.

```
Switch# show flash
File Name File Size Modified

startup-config 1191 2000-01-01 00:00:23
rsa1 974 2000-01-01 00:00:18
rsa2 1675 2000-01-01 00:00:18
dsa2 668 2000-01-01 00:00:18
ssl_cert 993 2000-01-01 00:00:18
image0 (active) 4372401 2012-09-24 01:57:29
```

```
image1 (backup) 0
```

## 4.4.29 ping

### Command:

```
ping HOSTNAME [count <1-99999999>]
```

### Mode:

Privileged EXEC

### Usage Guide:

Use "ping" command to do network ping diagnostic.

### Example:

This example shows how to ping remote host 192.168.1.111.

```
Switch# ping 192.168.1.111
PING 192.168.1.111 (192.168.1.111): 56 data bytes
64 bytes from 192.168.1.111: icmp_seq=0 ttl=128 time=10.0 ms
64 bytes from 192.168.1.111: icmp_seq=1 ttl=128 time=0.0 ms
64 bytes from 192.168.1.111: icmp_seq=2 ttl=128 time=0.0 ms
64 bytes from 192.168.1.111: icmp_seq=3 ttl=128 time=0.0 ms
--- 192.168.1.111 ping statistics ---
4 packets transmitted, 4 packets received, 0% packet loss
round-trip min/avg/max = 0.0/2.5/10.0 ms
```

## 4.4.30 traceroute

### Command:

```
traceroute A.B.C.D [max_hop <2-255>]
```

### Parameter:

**A.B.C.D** Specify IPv4 to trace.  
**max\_hop <2-255>** Specify maximum hop to trace.

**Mode:**

User EXEC

Privileged EXEC

**Usage Guide:**

Use “**traceroute**” command to do network trace route diagnostic.

**Example:**

This example shows how to trace route host 192.168.1.111.

```
Switch# traceroute 192.168.1.111
traceroute to 192.168.1.111 (192.168.1.111), 30 hops max, 40 byte packets
 1 192.168.1.111 (192.168.1.111) 0 ms 10 ms 0 ms
```

## 4.4.31 clear arp

**Command:**

```
clear arp [A.B.C.D]

show arp
```

**Parameter:**

**A.B.C.D**                      Specify specific arp entry to clear.

**Mode:**

User EXEC

Privileged EXEC

**Usage Guide:**

Use “**clear arp**” command to clear all or specific one arp entry.

Use “**show arp**” command to show all arp entries.

**Example:**

This example shows how to show arp entries.

```
Switch# show arp
Address HWtype HWaddress Flags Mask Iface
192.168.1.111 ether 00:30:4F:F1:4B:3C C eth0
```

This example shows how to clear all arp entries.

```
Switch(config)# clear arp
```

## 4.4.32 show version

**Command:**

```
show version
```

**Mode:**

User EXEC

Privileged EXEC

**Usage Guide:**

Use "**show version**" command to show loader and firmware version and build date.

**Example:**

This example shows how to show system version.

```
Switch# show version
Loader Version : 1.3.0.26225
Loader Date : Thu May 17 15:19:42 CST 2012
Firmware Version : 2.5.0-beta.32811
Firmware Date : Mon Sep 24 19:33:42 CST 2012
```

## 4.4.33 show info

**Command:**

```
show info
```

**Mode:**

User EXEC

Privileged EXEC

**Usage Guide:**

Use “show info” command to show system summary information.

**Example:**

This example shows how to show system version.

```
Switch# show info
System Name : Switch
System Location : Default Location
System Contact : Default Contact
MAC Address : 00:30:4F:EF:01:02
IP Address : 192.168.1.1
Subnet Mask : 255.255.255.0
Loader Version : 1.3.0.26225
Loader Date : Thu May 17 15:19:42 CST 2012
Firmware Version : 2.5.0-beta.32811
Firmware Date : Mon Sep 24 19:33:42 CST 2012
System Object ID : 1.3.6.1.4.1.27282.3.2.10
System Up Time : 0 days, 1 hours, 49 mins, 29 secs
```

## 4.4.34 show history

**Command:**

```
show history
```

**Mode:**

- User EXEC
- Privileged EXEC
- Global Configuration

**Usage Guide:**

Use “**show history**” to show commands we input before.

**Example:**

This example shows how show history commands.

```
Switch# show history
Maximun History Count: 100

1. enable
2. configure
3. line console
4. exit
5. show history
6. line
7. exit
8. show history
9. configure
10. line
11. line console
12. exit
13. line console
14. history 100
15. exit
16. show history
17. exit
18. show history
```

## 4.4.35 show username

**Command:**

```
show username
```

**Mode:**

Privileged EXEC

**Usage Guide:**

Use “**show username**” command show all user accounts in local database.

**Example:**

This example shows how to show existing user accounts.



```
Switch# show username
Priv | Type | User Name | Password
-----+-----+-----+-----
01 | secret | | dnXencJRwfIV6
15 | secret | admin | FzjrGO6vfbERY
15 | secret | test | 7p57T9yMkViSUS
```

## 4.4.36 show ip

**Command:**

```
show ip
```

**Mode:**

User EXEC

Privileged EXEC

**Usage Guide:**

Use “**show ip**” command to show system IPv4 address, net mask and default gateway.

**Example:**

This example shows how to show current ipv4 address of the switch.

```
Switch# show ip
IP Address: 192.168.1.200
Subnet Netmask: 255.255.255.0
Default Gateway: 192.168.1.254
```

## 4.4.37 show ip dhcp

**Command:**

```
show ip dhcp
```

**Mode:**

User EXEC

Privileged EXEC

**Usage Guide:**

Use “show ip dhcp” command to show IPv4 dhcp client enable state.

**Example:**

This example shows how to show current dhcp client state of the switch.

```
Switch# show ip dhcp
DHCP Status : enabled
```

## 4.4.38 show ipv6

**Command:**

```
show ipv6
```

**Mode:**

User EXEC

Privileged EXEC

**Usage Guide:**

Use “**show ipv6**” command to show system IPv6 address, net mask, default gateway and auto config state.

**Example:**

This example shows how to show current ipv6 address of the switch.

```
Switch# show ipv6
IPv6 DHCP Configuration : Disabled
IPv6 DHCP DUID :
IPv6 Auto Configuration : Enabled
IPv6 Link Local Address : fe80::dcad:beff:feef:102/64
IPv6 static Address : fe80::20e:2eff:fef1:4b3c/128
IPv6 static Gateway Address : ::
IPv6 in use Address : fe80::dcad:beff:feef:102/64
IPv6 in use Gateway Address : ::
```

## 4.4.39 show ipv6 dhcp

**Command:**

```
show ipv6 dhcp
```

**Mode:**

User EXEC

Privileged EXEC

**Usage Guide:**

Use “**show ipv6 dhcp**” command to show system IPv6 dhcp client enable state.

**Example:**

This example shows how to show current dhcpv6 client state of the switch.

```
Switch# show ipv6 dhcp
DHCPv6 Status : enabled
```

## 4.4.40 show line

**Command:**

```
show line [(console | telnet | ssh)]
```

**Parameter:**

|                |                              |
|----------------|------------------------------|
| <b>console</b> | Select console line to show. |
| <b>telnet</b>  | Select telnet line to show.  |
| <b>ssh</b>     | Select ssh line to show.     |

**Mode:**

Privileged EXEC

**Usage Guide:**

Use “**show line**” command to show all line configurations including session timeout, history count, password retry number and silent time. For telnet and ssh, it also shows the service enable/disable state.

**Example:**

This example shows how show all lines' information.

Switch# **show line**

Console =====

Session Timeout : 15 (minutes)

History Count : 128

Password Retry : 3

Silent Time : 0 (seconds)

Telnet =====

Telnet Server : disabled

Session Timeout : 20 (minutes)

History Count : 128

Password Retry : 3

Silent Time : 0 (seconds)

SSH =====

SSH Server : disabled

Session Timeout : 25 (minutes)

History Count : 128

Password Retry : 3

Silent Time : 0 (seconds)

## 4.5 Cable Diagnostics

### 4.5.1 show cable-diag interface

**Command:**

```
show cable-diag interfaces
```

**Parameter:**

|                   |                                                                                  |
|-------------------|----------------------------------------------------------------------------------|
| <b>login</b>      | Add/Edit login authentication list                                               |
| <b>enable</b>     | Add/Edit enable authentication list                                              |
| <b>default</b>    | Edit default authentication list                                                 |
| <b>LISTNAME</b>   | Specify the list name for authentication type                                    |
| <b>METHODLIST</b> | Specify the authenticate method, including none, local, enable, tacacs+, radius. |

**Mode:**

Global Configuration

**Usage Guide:**

Display the estimated length of copper cable attached to the ports.

**show cable-diag interface all**

Display the estimated length of copper cables attached to all ports.

**show cable-diag interface**

Display the estimated length of copper cable attached to port gi1.

**Example:**

```
Switch(config)# show cable-diag interfaces gi1
Port | Speed | Local pair | Pair length | Pair status
-----+-----+-----+-----+-----
gi1 | auto | Pair A | 0.88 | Open
 | | Pair B | 0.87 | Open
 | | Pair C | 0.82 | Open
 | | Pair D | 0.82 | Open
```

## 4.6 DHCP Snooping

### 4.6.1 Ip dhcp snooping

**Command:**

```
ip dhcp snooping
no ip dhcp snooping
```

**Default:**

DHCP snooping is disabled

**Mode:**

Global Configuration

**Usage Guide:**

Use the ip dhcp snooping command to enable DHCP Snooping function. Use the no form of this command to disable.

**Example:**

The example shows how to enable DHCP Snooping on VLAN 1. You can verify settings by the following show ip dhcp snooping command.

```
switch(config)# ip dhcp snooping
switch(config)# ip dhcp snooping vlan 1
switch(config)# show ip dhcp snooping
DHCP Snooping : enabled
Enable on following Vlans : 1
circuit-id default format: vlan-port
remote-id : 00:11:22:33:44:55 (Switch Mac in Byte Order)
```

### 4.6.2 ip dhcp snooping vlan

**Command:**

```
ip dhcp snooping vlan VLAN-LIST
```

**Parameter:**

**VLAN-LIST** Specify VLAN ID or a range of VLANs to enable or disable dynamic Arp inspection

**Default:**

Default is disabled on all VLANs

**Mode:**

Global Configuration

**Usage Guide:**

Use the **ip dhcp snooping vlan** command to enable VLANs on DHCP Snooping function. Use the **no** form of this command to disable VLANs on DHCP Snooping function.

**Example:**

The example shows how to enable VLAN 1-100 on DHCP Snooping, and then disable VLAN 30-40 on DHCP Snooping. You can verify settings by the following **show ip dhcp snooping** command.

```

switch(config)# vlan 1-100
switch(config)# exit
switch(config)# ip dhcp snooping
switch(config)# ip dhcp snooping vlan 1-100
switch(config)# show ip dhcp snooping
DHCP Snooping : enabled
Enable on following Vlans : 1-100
circuit-id default format: vlan-port
remote-id: : 00:11:22:33:44:55 (Switch Mac in Byte Order)
switch(config)# no ip dhcp snooping vlan 30-40
switch(config)# show ip dhcp snooping
DHCP Snooping : enabled
Enable on following Vlans : 1-29,41-100
circuit-id default format: vlan-port
remote-id: : 00:11:22:33:44:55 (Switch Mac in Byte Order)

```

## 4.6.3 ip dhcp snooping trust

**Command:**

```

ip dhcp snooping trust

no ip dhcp snooping trust

```

**Default:**

DHCP snooping trust is disabled

**Mode:**

Interface Configuration

**Usage Guide:**

Use the **ip dhcp snooping trust** command to set trusted interface. The switch does not check DHCP packets that are received on the trusted interface; it simply forwards it. Use the **no** form of this command to set untrusted interface.

**Example:**

The example shows how to set interface gi1 to trust. You can verify settings by the following **show ip dhcp snooping interface** command.

```
switch(config)# interface gi1
switch(config-if)# ip dhcp snooping trust
switch(config-if)# do show ip dhcp snooping interface gi1
Interfaces|Trust State|Rate (pps)|hwaddr Check|Insert Option82|
-----+-----+-----+-----+-----+
gi1 | Trusted | None | disabled | disabled |
```

## 4.6.4 ip dhcp snooping verify

**Command:**

```
ip dhcp snooping verify mac-address

no ip dhcp snooping verify mac-address
```

**Default:**

DHCP snooping verify mac-address is disabled

**Mode:**

Interface Configuration

**Usage Guide:**

Use the **ip dhcp snooping verify** command to verify MAC address function on interface.

The “**mac-address**” drop DHCP packets that chaddr and ethernet-source-mac is not match.

**Example:**

The example shows how to set interface gi1 to validate “**mac-address**”. You can verify settings by the following **show ip dhcp snooping interface** command.

```
switch(config)# interface gi1
```



```

switch(config-if)# ip dhcp snooping verify mac-address
switch(config-if)# do show ip dhcp snooping interface gi1
Interfaces|Trust State|Rate (pps)|hwaddr Check|Insert Option82|
-----+-----+-----+-----+-----+
gi1 | Untrusted | None | enabled | disabled |

```

## 4.6.5 ip dhcp snooping limit rate

### Command:

```

ip dhcp snooping limit rate <1-300>

no ip dhcp snooping limit rate

```

### Parameter:

**<1-300>** Set 1 to 300 PPS of DHCP packet rate limitation

### Default:

Default is un-limited of DHCP packet

### Mode:

Interface Configuration

### Usage Guide:

Use the **ip dhcp snooping limit rate** command to set rate limitation on interface. The switch drop DHCP packets after receives more than configured rate of packets per second. Use the **no** form of this command to return to default settings.

### Example:

The example shows how to set rate limit to 30 pps on interface gi1. You can verify settings by the following **show ip dhcp snooping interface** command.

```

switch(config)# interface gi1
switch(config-if)# ip dhcp snooping rate-limit 30
switch(config-if)# do show ip dhcp snooping interfaces gi1
Interfaces|Trust State|Rate (pps)|hwaddr Check|Insert Option82|
-----+-----+-----+-----+-----+
gi1 | Untrusted | 30 | disabled | disabled |

```

## 4.6.6 clear ip dhcp snooping statistics

### Command:

```
clear ip dhcp snooping interfaces IF_PORTS statistics
```

### Parameter:

**IF\_PORTS** specifies ports to clear statistics

### Mode:

Global Configuration

### Usage Guide:

Use the **clear ip dhcp snooping interfaces statistics** command to clear statistics that are recorded on interface.

### Example:

The example shows how to clear statistics on interface gi1. You can verify settings by the following **show ip dhcp snooping interface statistics** command.

```
switch# clear ip dhcp snooping interfaces gi1 statistics
switch# show ip dhcp snooping interfaces gi1 statistics
Interfaces | Forwarded | Chaddr Check Dropped | Untrust Port Dropped | Untrust Port With
Option82 Dropped | Invalid Drop
-----+-----+-----+-----+-----+-----
gi1 | 0 | 0 | 0 | 0 | 0
```

## 4.6.7 show ip dhcp snooping

### Command:

```
show ip dhcp snooping
```

### Mode:

Global Configuration

### Usage Guide:

Use the **show ip dhcp snooping** command to show settings of DHCP Snooping.

**Example:**

The example shows how to show settings of DHCP Snooping

```
switch(config)# show ip dhcp snooping
DHCP Snooping : enabled
Enable on following Vlans : 1
circuit-id default format: vlan-port
remote-id: : 00:11:22:33:44:55 (Switch Mac in Byte Order)
```

## 4.6.8 show ip dhcp snooping interface

**Command:**

```
show ip dhcp snooping interfaces IF_PORTS

no show ip dhcp snooping interfaces IF_PORTS
```

**Parameter:**

**IF\_PORTS** specifies ports to show statistics

**Mode:**

Global Configuration

**Usage Guide:**

Use the **show ip dhcp snooping interfaces** command to show settings or statistics of interface.

**Example:**

The example shows how to show settings of interface gi1.

```
switch# show ip dhcp snooping interface gi1
Interfaces | Trust State | Rate (pps) | hwaddr Check | Insert Option82 |
-----+-----+-----+-----+-----+
gi1 | Untrusted | None | enabled | disabled |
```

The example shows how to show statistics of interface gi1.

```
switch# show ip dhcp snooping interfaces gi1 statistics
Interfaces | Forwarded | Chaddr Check Dropped | Untrust Port Dropped | Untrust Port With
```

```
Option82 Dropped | Invalid Drop
-----+-----+-----+-----+-----+-----
gi1 | 0 | 0 | 0 | 0 | 0 | 0
```

## 4.6.9 show ip dhcp snooping binding

**Command:**

```
show ip dhcp snooping binding
```

**Mode:**

Global Configuration

**Usage Guide:**

Use the **show ip dhcp snooping binding** command to show binding entries that learned by DHCP Snooping

**Example:**

The example shows how to show binding entries that learned by DHCP Snooping.

```
switch# show ip dhcp snooping binding
Bind Table: Maximun Binding Entry Number 192
Port | VID | MAC Address | IP | Type | Lease Time
-----+-----+-----+-----+-----+-----
fa1 | 1 | 00:30:4F:C7:12:62 | 192.168.1.100(255.255.255.255)|DHCP Snooping | 86400
```

## 4.6.10 ip dhcp snooping option

**Command:**

```
ip dhcp snooping option

no ip dhcp snooping option
```

**Default:**

DHCP snooping option82 is disabled

**Mode:**

Interface Configuration

**Usage Guide:**

Use the **ip dhcp snooping option** command to enable that insert option82 content into packet. Use the **no** form of this command to disable.

**Example:**

The example shows how to enable option82 insertion. You can verify settings by the following **show ip dhcp snooping interface** command.

```
switch(config)# interface gi1
switch(config-if)# ip dhcp snooping option
switch(config-if)# do show ip dhcp snooping interfaces gi1
Interfaces | Trust State | Rate (pps) | hwaddr Check | Insert Option82 |
-----+-----+-----+-----+-----+
gi1 | Untrusted | None | disabled | enabled |
```

## 4.6.11 ip dhcp snooping option action

**Command:**

```
ip dhcp snooping option action (drop|keep|replace)

no ip dhcp snooping option action
```

**Parameter:**

- drop**                      Drop packets with option82 that are received from un trusted port
- keep**                      Keep original option82 content in packet
- replace**                    Replace option82 content by switch setting

**Default:**

DHCP snooping option82 is drop

**Mode:**

Interface Configuration

**Usage Guide:**

Use the **ip dhcp snooping option action** command to set the action when receive packets that with option82 content. Use the **no** form of this command to default setting.

**Example:**

The example shows how to set action to replace option82 content. You can verify settings by the following **show**

running-config command.

```
switch(config)# interface gi1
switch(config-if)# ip dhcp snooping option action replace
```

## 4.6.12 ip dhcp snooping option circuit-id

Command:

```
ip dhcp snooping [vlan <1-4094>] option circuit-id STRING
no ip dhcp snooping [vlan <1-4094>] option circuit-id
```

Parameter:

|                            |                                                         |
|----------------------------|---------------------------------------------------------|
| <b>vlan &lt;1-4094&gt;</b> | VLAN ID to set user defined circuit-id string           |
| <b>STRING</b>              | Circuit-id string, 1 to 63 ASCII characters, no spaces. |

Default:

Default circuit-id is port id + vlan id in byte format.

Mode:

Interface Configuration

Usage Guide:

Use the **ip dhcp snooping option circuit-id** command to set user-defined circuit-id string. Circuit-id is per port per VLAN setting. If a VLAN is not found user-defined circuit-id then use per port circuit-id string. Use the **no** form of this command to default setting.

Example:

The example shows how to set a user-defined circuit-id string on interface gi1 and VLAN 1. You can verify settings by the following **show running-config** command

```
switch(config)# interface gi1
switch(config-if)# ip dhcp snooping vlan 1 option circuit-id test
```

## 4.6.13 ip dhcp snooping option remote-id

**Command:**

```
ip dhcp snooping option remote-id STRING

no ip dhcp snooping option remote-id
```

**Parameter:**

**STRING** Remote-id string, 1 to 63 ASCII characters, no spaces.

**Default:**

Default remote-id is the switch MAC address in byte order

**Mode:**

Global Configuration

**Usage Guide:**

Use the **ip dhcp snooping option remote-id** command to set user-defined remote-id string.

Remote-id is an global and unique string. Use the **no** form of this command to default setting.

**Example:**

The example shows how to set a user-defined remote-id string on switch. You can verify settings by the following

**show ip dhcp snooping option remote-id**

```
switch(config)# ip dhcp snooping option remote-id test_remote
switch(config)# do show ip dhcp snooping option remote-id
Remote ID: test_remote
```

## 4.6.14 show ip dhcp snooping option

**Command:**

```
show ip dhcp snooping option remote-id
```

**Mode:**

Global Configuration

**Usage Guide:**

Use the **show ip dhcp snooping option remote-id** command to show remote-id string.

**Example:**

The example shows how to show remote-id string

```
switch(config)# do show ip dhcp snooping option remote-id
Remote ID: test_remote
```

## 4.6.15 ip dhcp snooping database

### Command:

```
ip dhcp snooping database flash

ip dhcp snooping database tftp (A.B.C.D|HOSTNAME) NAME

no ip dhcp snooping database
```

### Parameter:

**(A.B.C.D|** Specify the IP address or hostname of remote TFTP server  
**HOSTNAME)**  
**NAME** Input name of backup file

### Default:

DHCP snooping database is disabled

### Mode:

Global Configuration

### Usage Guide:

Use the **ip dhcp snooping database** command to enable DHCP Snooping database agent. The “**flash**” means that write backup file to switch local drive. The “**tftp**” means that write backup file to remote TFTP server. Use the **no** form of this command to disable.

### Example:

The example shows how to enable DHCP Snooping database agent and write backup file to remote TFTP server with file name “backup\_file”. You can verify settings by the following **show ip dhcp snooping database** command.

```
switch(config)# ip dhcp snooping database tftp 192.168.1.50 backup_file
switch(config)# do show ip dhcp snooping database
Type : tftp: 192.168.1.50
FileName : backup_file
Write delay Timer : 300 seconds
Abort Timer : 300 seconds
```



```

Agent Running : Running
Delay Timer Expiry : 300 seconds
Abort Timer Expiry : 299
Last Succeeded Time : None
Last Failed Time : None
Last Failed Reason : No failure recorded.
Total Attempts : 1
Successful Transfers : 0 Failed Transfers : 0
Successful Reads : 0 Failed Reads : 0
Successful Writes : 0 Failed Writes : 0

```

## 4.6.16 ip dhcp snooping database write-deley

### Command:

```

ip dhcp snooping database write-delay <15-86400>

no ip dhcp snooping database write-delay

```

### Parameter:

**<15-86400>** Specifies the seconds of timeout. Specify the duration for which the transfer should be delayed after the binding database changes

### Default:

DHCP snooping database write-delay is 300 seconds

### Mode:

Global Configuration

### Usage Guide:

Use the **ip dhcp snooping database write-delay** command to modify the write-delay timer. Use the **no** form of this command to default setting.

### Example:

The example shows how to set write-delay timer to 60 seconds. You can verify settings by the following **show ip dhcp snooping database** command.

```

switch(config)# ip dhcp snooping database write-delay 60
switch(config)# do show ip dhcp snooping database

```

```
Type : tftp: 192.168.1.50
FileName : backup_file
Write delay Timer : 60 seconds
Abort Timer : 300 seconds
Agent Running : Running
Delay Timer Expiry : 300 seconds
Abort Timer Expiry : 299
Last Succeeded Time : None
Last Failed Time : None
Last Failed Reason : No failure recorded.
Total Attempts : 1
Successful Transfers : 0 Failed Transfers : 0
Successful Reads : 0 Failed Reads : 0
Successful Writes : 0 Failed Writes : 0
```

## 4.6.17 ip dhcp snooping database timeout

**Command:**

```
ip dhcp snooping database timeout <0-86400>

no ip dhcp snooping database timeout
```

**Parameter:**

**<0-86400>** specifies the seconds of timeout. Specify (in seconds) how long to wait for the database transfer process to finish before stopping the process. Use 0 to define an infinite duration, which means to continue trying the transfer indefinitely.

**Default:**

DHCP snooping database timeout is 300 seconds

**Mode:**

Global Configuration

**Usage Guide:**

Use the **ip dhcp snooping database timeout** command to modify the timeout timer. Use the **no** form of this command to default setting.

**Example:**

The example shows how to set timeout timer to 60 seconds. You can verify settings by the following **show ip dhcp**

snooping database command.

```
switch(config)# ip dhcp snooping database timeout 60
switch(config)# do show ip dhcp snooping database
Type : tftp: 192.168.1.50
FileName : backup_file
Write delay Timer : 300 seconds
Abort Timer : 60 seconds
Agent Running : Running
Delay Timer Expiry : 300 seconds
Abort Timer Expiry : 299
Last Succeeded Time : None
Last Failed Time : None
Last Failed Reason : No failure recorded.
Total Attempts : 1
Successful Transfers : 0 Failed Transfers : 0
Successful Reads : 0 Failed Reads : 0
Successful Writes : 0 Failed Writes : 0
```

## 4.6.18 clear ip dhcp snooping database statistics

Command:

```
clear ip dhcp snooping database statistics
```

Mode:

Global Configuration

Usage Guide:

Use the **clear ip dhcp snooping database statistics** command to clear statistics of DHCP Snooping database.

Example:

The example shows how to clear statistics of DHCP Snooping agent. You can verify settings by the following **show ip dhcp snooping database** command.

```
switch# clear ip dhcp snooping database statistics
switch# show ip dhcp snooping database
Type : tftp: 192.168.1.50
FileName : backup_file
```

```
Write delay Timer : 300 seconds
Abort Timer : 60 seconds
Agent Running : Running
Delay Timer Expiry : 300 seconds
Abort Timer Expiry : 299
Last Succeeded Time : None
Last Failed Time : None
Last Failed Reason : No failure recorded.
Total Attempts : 0
Successful Transfers : 0 Failed Transfers : 0
Successful Reads : 0 Failed Reads : 0
Successful Writes : 0 Failed Writes : 0
```

## 4.6.19 renew ip dhcp snooping database

**Command:**

```
renew ip dhcp snooping database
```

**Mode:**

Global Configuration

**Usage Guide:**

Use the **renew ip dhcp snooping database** command to renew DHCP Snooping database from backup file.

**Example:**

The example shows how to renew DHCP Snooping database. You can verify settings by the following **show ip dhcp snooping database** and **show ip dhcp snooping binding** command.

```
switch# show ip dhcp snooping database
Type : tftp: 192.168.1.50
FileName : backup_file
Write delay Timer : 300 seconds
Abort Timer : 60 seconds
Agent Running : Running
Delay Timer Expiry : 300 seconds
Abort Timer Expiry : 299
Last Succeeded Time : None
```

```

Last Failed Time : None
Last Failed Reason : No failure recorded.
Total Attempts : 1
Successful Transfers : 1 Failed Transfers : 0
Successful Reads : 1 Failed Reads : 0
Successful Writes : 0 Failed Writes : 0
switch# show ip dhcp snooping binding
Bind Table: Maximun Binding Entry Number 192
Port | VID | MAC Address | IP | Type | Lease Time
-----+-----+-----+-----+-----+-----
fa1 | 1 | 00:30:4F:C7:12:62 | 192.168.1.100(255.255.255.255)|DHCP Snooping | 86400

```

## 4.6.20 show ip dhcp snooping database

**Command:**

```

show ip dhcp snooping database

```

**Mode:**

Global Configuration

**Usage Guide:**

Use the **show ip dhcp snooping database** command to show settings of DHCP Snooping agent.

**Example:**

The example shows how to show settings of DHCP Snooping agent.

```

switch(config)# show ip dhcp snooping database
Type : tftp: 192.168.1.50
FileName : backup_file
Write delay Timer : 300 seconds
Abort Timer : 60 seconds
Agent Running : Running
Delay Timer Expiry : 300 seconds
Abort Timer Expiry : 299
Last Succeeded Time : None
Last Failed Time : None
Last Failed Reason : No failure recorded.

```

Total Attempts : 1

Successful Transfers : 1 Failed Transfers : 0

Successful Reads : 1 Failed Reads : 0

Successful Writes : 0 Failed Writes : 0

## 4.7 DoS

### 4.7.1 dos

Command:

```
dos (daeqsa-deny | icmp-frag-pkts-deny | icmpv4-ping-max-check |
icmpv6-ping-max-check | ipv6-min-frag-size-check | land-deny | nullscan-deny |
pod-deny | smurf-deny | syn-sport11024-deny | synfin-deny | synrst-deny |
tcp-frag-off-min-check | tcpblat-deny | tcphdr-min-check | udpblat-deny | xma-deny)

no dos (daeqsa-deny | icmp-frag-pkts-deny | icmpv4-ping-max-check |
icmpv6-ping-max-check | ipv6-min-frag-size-check | land-deny | nullscan-deny |
pod-deny | smurf-deny | syn-sport11024-deny | synfin-deny | synrst-deny |
tcp-frag-off-min-check | tcpblat-deny | tcphdr-min-check | udpblat-deny | xma-deny)

dos icmp-ping-max-length <0-65535>

dos ipv6-min-frag-size-length <0-65535>

dos smurf-netmask <0-32>

dos tcphdr-min-length <0-31>
```

Parameter:

|                                  |                                                     |
|----------------------------------|-----------------------------------------------------|
| <b>daeqsa-deny</b>               | Enable/Disable daeqsa-deny protection.              |
| <b>icmp-frag-pkts-deny</b>       | Enable/Disable icmp-frag-pkts-deny protection.      |
| <b>icmp-ping-max-length</b>      | Specify icmp-ping-max length.                       |
| <b>icmpv4-ping-max-check</b>     | Enable/Disable icmpv4-ping-max-check protection.    |
| <b>icmpv6-ping-max-check</b>     | Enable/Disable icmpv6-ping-max-check protection.    |
| <b>ipv6-min-frag-size-check</b>  | Enable/Disable ipv6-min-frag-size-check protection. |
| <b>ipv6-min-frag-size-length</b> | Specify ipv6-min-fragsize length.                   |

|                               |                                                   |
|-------------------------------|---------------------------------------------------|
| <b>land-deny</b>              | Enable/Disable land-deny protection.              |
| <b>nullscan-deny</b>          | Enable/Disable nullscan-deny protection.          |
| <b>pod-deny</b>               | Enable/Disable pod-deny protection.               |
| <b>smurf-deny</b>             | Enable/Disable smurf-deny protection.             |
| <b>smurf-netmask</b>          | Specify smurf netmask.                            |
| <b>syn-sportl1024-deny</b>    | Enable/Disable syn-sportl1024-deny protection.    |
| <b>synfin-deny</b>            | Enable/Disable synfin-deny protection.            |
| <b>synrst-deny</b>            | Enable/Disable synrst-deny protection.            |
| <b>tcp-frag-off-min-check</b> | Enable/Disable tcp-frag-off-min-check protection. |
| <b>eck</b>                    |                                                   |
| <b>tcpblat-deny</b>           | Enable/Disable tcpblat-deny protection.           |
| <b>tcphdr-min-check</b>       | Enable/Disable tcphdr-min-check protection.       |
| <b>tcphdr-min-length</b>      | Specify tcphdr-min length.                        |
| <b>udpblat-deny</b>           | Enable/Disable udpblat-deny protection.           |
| <b>xma-deny</b>               | Enable/Disable xma-deny protection.               |

**Default:**

Default enable state of all DoS types are enabled.

Default smurf netmask length is 0.

Default tcphdr-min length is 20.

Default icmp-ping-max length is 512.

Default ipv6-min-frag-size length is 1240.

**Mode:**

Global Configuration

**Usage Guide:**

DoS is using to protect malicious attack from other devices. This command can configure DUT to enable/disable following types of attacks.

- **daeqsa-deny** : Destination MAC equals to source MAC
- **icmp-frag-pkts-deny** : Fragmented ICMP packets
- **icmp-ping-max-length** : DoS information
- **icmpv4-ping-max-check** : Check ICMPv4 ping maximum packets size
- **icmpv6-ping-max-check** : Check ICMPv6 ping maximum packets size
- **ipv6-min-frag-size-check** : Check minimum size of IPv6 fragments
- **ipv6-min-frag-size-length** : DoS information
- **land-deny** : Source IP equals to destination IP
- **nullscan-deny** : NULL Scan Attacks
- **pod-deny** : Ping of Death Attacks
- **smurf-deny** : Smurf Attacks



- **smurf-netmask** : DoS information
- **syn-sportl1024-deny** : SYN packets with sport less than 1024
- **synfin-deny** : SYN and FIN bits set in the packet
- **synrst-deny** : SYNC and RST bits set in the packet
- **tcp-frag-off-min-check** : TCP fragment packet with offset equals to one
- **tcpblat-deny** : Source TCP port equals to destination TCP port
- **tcphdr-min-check** : Check minimum TCP header
- **tcphdr-min-length** : DoS information
- **udpblat-deny** : Source UDP port equals to destination UDP port
- **xma-deny** : Xmascan: sequence number is zero and the FIN, URG and PSH bits are set

**Example:**

This example shows how to disable synfin-deny and smurf with netmask length 30.

```
Switch(config)# no dos synfin-deny
Switch(config)# dos smurf-netmask 30
```

This example shows how to show current dos state on interface gi1

```
Switch# show dos
Type | State (Length)
-----+-----
DMAC equal to SMAC | enabled
Land (DIP = SIP) | enabled
UDP Blat (DPORT = SPORT) | enabled
TCP Blat (DPORT = SPORT) | enabled
POD (Ping of Death) | enabled
IPv6 Min Fragment Size | enabled (1240 Bytes)
ICMP Fragment Packets | enabled
IPv4 Ping Max Packet Size | enabled (512 Bytes)
IPv6 Ping Max Packet Size | enabled (512 Bytes)
Smurf Attack | enabled (Netmask Length: 30)
TCP Min Header Length | enabled (20 Bytes)
TCP Syn (SPORT < 1024) | disabled
Null Scan Attack | enabled
X-Mas Scan Attack | enabled
TCP SYN-FIN Attack | enabled
TCP SYN-RST Attack | enabled
TCP Fragment (Offset = 1) | enabled
```

## 4.7.2 port dos

**Command:**

```
dos
no dos
```

**Default:**

Default value is disable

**Mode:**

Interface Configuration

**Usage Guide:**

Use “**dos**” command to enable dos configuration on selected ports. Use “**no dos**” to diable on selected ports.

**Example:**

This example shows how to show current dos state on interface gi1

```
Switch# show dos interfaces gi1
Port | DoS Protection | Gratuitous-ARP
-----+-----+-----
gi1 | enabled | disabled
```

## 4.7.3 ip gratuitous-arps

**Command:**

```
ip gratuitous-arps
no ip gratuitous-arps
```

**Default:**

Default value is disable

**Mode:**

Interface Configuration

**Usage Guide:**

Use “**ip gratuitous-arps**” command to enable dos configuration on selected ports. Use “**no ip gratuitous-arps**” to disable on selected ports.

**Example:**

This example shows how to show current dos state on interface gi1

```
Switch# show dos interfaces gi1
Port | DoS Protection | Gratuitous-ARP
-----+-----+-----
gi1 | enabled | disabled
```

## 4.7.4 show dos

**Command:**

```
show dos [interfaces IF_PORTS]
```

**Parameter:**

*IF\_PORTS*            Enable/Disable syn-fin protection.

**Mode:**

Privileged EXEC

**Usage Guide:**

Use “**show dos**” command to show dos configuration on selected ports

**Example:**

This example shows how to show current dos state on interface gi1

```
Switch# show dos interfaces gi1
Port | DoS Protection | Gratuitous-ARP
-----+-----+-----
gi1 | enabled | disabled
```

## 4.8 Dynamic ARP Inspection

### 4.8.1 ip arp inspection

**Command:**

```
ip arp inspection
no ip arp inspection
```

**Default:**

Dynamic Arp inspection is disabled

**Mode:**

Global Configuration

**Usage Guide:**

Use the **ip arp inspection** command to enable Dynamic Arp Inspection function. Use the **no** form of this command to disable.

**Example:**

The example shows how to enable Dynamic Arp Inspection on VLAN 1. You can verify settings by the following **show ip arp inspection** command.

```
switch(config)# ip arp inspection
switch(config)# ip arp inspection vlan 1
switch(config)# show ip arp inspection
Dynamic ARP Inspection : enabled
Enable on Vlans : 1
```

## 4.8.2 ip arp inspection vlan

**Command:**

```
ip arp inspection vlan VLAN-LIST
no ip arp inspection vlan VLAN-LIST
```

**Parameter:**

**VLAN-LIST** Specify VLAN ID or a range of VLANs to enable or disable dynamic Arp inspection

**Default:**

Default is disabled on all VLANs

**Mode:**

Global Configuration

**Usage Guide:**

Use the **ip arp inspection vlan** command to enable VLANs on Dynamic Arp Inspection function. Use the **no** form of this command to disable VLANs on Dynamic Arp Inspection function.

**Example:**

The example shows how to enable VLAN 1-100 on Dynamic Arp Inspection, and then disable VLAN 30-40 on Dynamic Arp Inspection. You can verify settings by the following **show ip arp inspection** command.

```
switch(config)# vlan 1-100
switch(config)# exit
switch(config)# ip arp inspection
switch(config)# ip arp inspection vlan 1-100
switch(config)# show ip arp inspection
Dynamic ARP Inspection : enabled
Enable on Vlans : 1-100
switch(config)# no ip arp inspection vlan 30-40
switch(config)# show ip arp inspection
Dynamic ARP Inspection : enabled
Enable on Vlans : 1-29,41-100
```

## 4.8.3 ip arp inspection trust

**Command:**

```
ip arp inspection trust

no ip arp inspection trust
```

**Default:**

Dynamic Arp inspection trust is disabled

**Mode:**

Interface Configuration

**Usage Guide:**

Use the **ip arp inspection trust** command to set trusted interface. The switch does not check ARP packets that are received on the trusted interface; it simply forwards it. Use the **no** form of this command to set untrusted interface.

**Example:**

The example shows how to set interface gi1 to trust. You can verify settings by the following **show ip arp inspection interface** command.

```
switch(config)# interface gi1
switch(config)# ip arp inspection trust
switch(config)# do show ip arp inspection interface gi1
Interfaces | Trust State | Rate (pps) | SMAC Check | DMAC Check | IP Check/Allow Zero |
-----+-----+-----+-----+-----+-----+
gi1 | Trusted | None | disabled | disabled | disabled/disabled
```

## 4.8.4 ip arp inspection validate

Command:

```
ip arp inspection validate src-mac

ip arp inspection validate dst-mac

ip arp inspection validate ip [allow-zeros]

no ip arp inspection validate src-mac

no ip arp inspection validate dst-mac

no ip arp inspection validate ip [allow-zeros]
```

Default:

Default is disabled of all validation

Mode:

Interface Configuration

Usage Guide:

Use the **ip arp inspection validate** command to enable validate function on interface.

The “**src-mac**” drop ARP requests and reply packets that arp-sender-mac and ethernet-source-mac is not match.

The “**dst-mac**” drop ARP reply packets that arp-target-mac and ethernet-dst-mac is not match. The “**ip**” drop ARP request and reply packets that sender-ip is invalid such as broadcast 、 multicast 、 all zero IP address and drop ARP reply packets that target-ip is invalid. The “**allow-zeros**” means won’t drop all zero IP address. Use the no form of this command to disable validation.

**Example:**

The example shows how to set interface gi1 to validate “src-mac” 、 “dst-mac” and “ip allow zeros”. You can verify settings by the following **show ip arp inspection interface** command.

```

switch(config)# interface gi1
switch(config-if)# ip arp inspection validate src-mac
switch(config-if)# ip arp inspection validate dst-ma
switch(config-if)# ip arp inspection validate ip allow-zeros
switch(config)# do show ip arp inspection interface gi1
Interfaces | Trust State | Rate (pps) | SMAC Check | DMAC Check | IP Check/Allow Zero |
-----+-----+-----+-----+-----+-----+
gi1 | Untrusted | None | enabled | enabled | enabled/ enabled

```

## 4.8.5 ip arp inspection rate-limit

**Command:**

```

ip arp inspection rate-limit <1-50>

no ip arp inspection rate-limit

```

**Parameter:**

**<1-50>** Set 1 to 50 PPS of DHCP packet rate limitation

**Default:**

Default is un-limited of ARP packet

**Mode:**

Interface Configuration

**Usage Guide:**

Use the **ip arp inspection rate-limit** command to set rate limitation on interface. The switch drop ARP packets after receives more than configured rate of packets per second. Use the no form of this command to return to default settings.

**Example:**

The example shows how to set rate limit to 30 pps on interface gi1. You can verify settings by the following **show ip arp inspection interface** command.

```
switch(config)# interface gi1
switch(config)# ip arp inspection rate-limit 30
switch(config)# do show ip arp inspection interface gi1
Interfaces | Trust State | Rate (pps) | SMAC Check | DMAC Check | IP Check/Allow Zero |
-----+-----+-----+-----+-----+-----+
gi1 | Untrusted | 30 | disabled | disabled | disabled/disabled
```

## 4.8.6 clear ip arp inspection statistics

Command:

```
clear ip arp inspection interfaces IF_PORTS statistics
```

Parameter:

**IF\_PORTS** specifies ports to clear statistics

Mode:

Global Configuration

Usage Guide:

Use the **clear ip arp inspection interfaces statistics** command to clear statistics that are recorded on interface.

Example:

The example shows how to clear statistics on interface gi1. You can verify settings by the following **show ip arp inspection interface statistics** command.

```
switch# clear ip arp inspection interfaces gi1 statistics
switch# show ip arp inspection interfaces gi1 statistics
Port| Forward |Source MAC Failures|Dest MAC Failures| SIP Validation Failures|DIP
Validation Failures|IP-MAC Mismatch Failures
-----+-----+-----+-----+-----+-----+
gi1| 0 | 0 | 0 | 0 | 0 | 0
```

## 4.8.7 show ip arp inspection

Command:



```
show ip arp inspection
```

**Mode:**

Global Configuration

**Usage Guide:**

Use the **show ip arp inspection** command to show settings of Dynamic Arp Inspection

**Example:**

The example shows how to show settings of Dynamic Arp Inspection

```
switch(config)# show ip arp inspection
Dynamic ARP Inspection : enabled
Enable on Vlans : 1
```

## 4.8.8 show ip arp inspection interface

**Command:**

```
show ip arp inspection interfaces IF_PORTS
show ip arp inspection interfaces IF_PORTS statistics
```

**Parameter:**

**IF\_PORTS** specifies ports to show statistics

**Mode:**

Global Configuration

**Usage Guide:**

Use the **show ip arp inspection interfaces** command to show settings or statistics of interface.

**Example:**

The example shows how to show settings of interface gi1.

```
switch# show ip arp inspection interface gi1
Interfaces | Trust State | Rate (pps) | SMAC Check | DMAC Check | IP Check/Allow Zero |
-----+-----+-----+-----+-----+-----+
gi1 | Trusted | None | disabled | disabled | disabled/disabled
```

The example shows how to show statistics of interface gi1.

```
Switch(config)# aaa authentication login test1 tacacs+ radius local
switch# show ip arp inspection interfaces gi1 statistics
Port| Forward |Source MAC Failures|Dest MAC Failures| SIP Validation Failures|DIP
Validation Failures|IP-MAC Mismatch Failures
-----+-----+-----+-----+-----+-----+-----
gi1|0|0|0|0|0|0|0
```

## 4.9 GVRP

### 4.9.1 gvrp

**Command:**

```
gvrp

no gvrp
```

**Default:**

no gvrp

**Mode:**

Global Configuration

**Usage Guide:**

'no gvrp' will clear all dynamic vlan entry. do not learn vlan.

The configure can use 'show gvrp'.

**Example:**

The following example specifies that set global gvrp test.

```
Switch(config)# gvrp
Switch# show gvrp
GVRP Status

GVRP : Enabled
Join time : 200 ms
Leave time : 600 ms
LeaveAll time : 10000 ms
```

### 4.9.2 gvrp (port)

**Command:**

```
Gvrp

no gvrp
```

**Default:**

no gvrp

**Mode:**

Interface Configuration

**Usage Guide:**

'no gvrp' will remove dynamic port from vlan

'gvrp' must work at port mode is trunk.

The configure can use show gvrp configuration.

**Example:**

The following example specifies that set port gvrp test.

The port gvrp enable must set port mode is trunk firstly.

```
Switch(config)#interface gi1
Switch(config-if)# switchport mode trunk
Switch(config)#gvrp
Switch# show gvrp configuration interfaces gi1
Port | GVRP-Status | Registration | Dynamic VLAN Creation
-----+-----+-----+-----
gi1 Enabled Normal Disabled
```

## 4.9.3 gvrp port registration mode

**Command:**

```
gvrp registration-mode (normal | fixed | forbidden)

show gvrp configuration
```

**Parameter:**

- (normal | fixed | forbidden)** normal: register dynamic vlan, and transmit all vlan attribute.
- forbidden)** fixed: do not register dynamic vlan, and only transmit static vlan attribute.
- forbidden: do not register dynamic vlan, and only transmit default vlan attribute.

**Mode:**

Interface Configuration

**Usage Guide:**

When set registration-mode is fixed or forbidden, will remove the port from vlan witch is dynamic port. And do not

learning vlan.

**Example:**

The following example specifies that set gvrp registration mode test.

```
Switch(config)# interface gi1
Switch(config-if)# gvrp registration-mode fixed
Switch# show gvrp configuration interfaces gi1
Port | GVRP-Status | Registration | Dynamic VLAN Creation
-----+-----+-----+-----
gi1 Enabled Fixed Disabled
```

## 4.9.4 gvrp port creation vlan forbidden

**Command:**

```
gvrp vlan-creation-forbid

no gvrp vlan-creation-forbid
```

**Default:**

no gvrp vlan-creation-forbid

**Mode:**

Interface Configuration

**Usage Guide:**

'gvrp vlan-creation-forbid' will not remove dynamic port from vlan immediate.

The configure can use show gvrp configuration.

**Example:**

The following example specifies that set port gvrp vlan-creation-forbid test.

```
Switch(config)#interface gi1
Switch(config-if)# gvrp vlan-creation-forbid
Switch(config-if)#exit
Switch# show gvrp configuration interfaces gi1
Port | GVRP-Status | Registration | Dynamic VLAN Creation
-----+-----+-----+-----
gi1 Enabled Normal Disabled
```

## 4.9.5 clear gvrp statistics

### Command:

```
clear gvrp (error-statistics | statistics) [interfaces IF_PORTS]
```

### Parameter:

|                                        |                                                                                             |
|----------------------------------------|---------------------------------------------------------------------------------------------|
| <b>(error-statistics   statistics)</b> | Error-statistics: error gvrp packet statistics<br>Statistics: gvrp event message statistics |
| <b>[interfaces IF_PORTS]</b>           | Specifies posts to clear statistics                                                         |

### Mode:

Privileged Configuration

### Usage Guide:

This command will clear the ports error statistics or statistics info.

The configure can use 'show gvrp error-statistics or show gvrp statistics' to check.

### Example:

The following example specifies that clear gvrp error statistics and statistics test.

```
Switch# clear gvrp statistics
Switch# clear gvrp error-statistics
Switch# show gvrp statistics
Switch# show gvrp error-statistics
```

## 4.9.6 show gvrp statistics

### Command:

```
show gvrp statistics [interfaces IF_PORTS]
show gvrp error-statistics [interfaces IF_PORTS]
```

### Parameter:

|                     |                 |
|---------------------|-----------------|
| <b>[interfaces]</b> | Specifies posts |
|---------------------|-----------------|

**IF\_PORTS]**

**Mode:**

Privileged Configuration

**Usage Guide:**

This command will display the ports error statistics or statistics info.

**Example:**

The following example specifies that display gvrp error statistics and statistics test.

```
Switch(config)# aaa authentication login test1 tacacs+ radius local
Switch# show gvrp statistics
Switch# show gvrp error-statistics
INVPROT : Invalid protocoal Id
INVATYP : Invalid Attribute Type INVALEN : Invalid Attribute Length
INVAVAL : Invalid Attribute Value INVEVENT: Invalid Event
Port | INVPROT | INVATYP | INVALEN | INVAVAL | INVEVENT
gi1 0 0 0 0 0
gi2 0 0 0 0 0
gi3 0 0 0 0 0
gi4 0 0 0 0 0
gi5 0 0 0 0 0
gi6 0 0 0 0 0
```

## 4.9.7 show gvrp

**Command:**

```
show gvrp
```

**Mode:**

privileged Configuration

**Usage Guide:**

This command will display the gvrp global info.

**Example:**

The following example specifies that display gvrp test.

```
Switch# show gvrp
GVRP Status

GVRP : Disabled
Join time : 200 ms
Leave time : 600 ms
LeaveAll time : 10000 ms
```

## 4.9.8 show gvrp port configuration

**Command:**

```
show gvrp configuration [interface IF_PORTS]
```

**Parameter:**

**[interface**            Display Specifies posts configuration  
**IF\_PORTS]**

**Mode:**

Privileged Configuration

**Usage Guide:**

This command will display the ports configuration info.

**Example:**

The following example specifies that display gvrp port configuration test.

```
Switch# show gvrp configuration
Port | GVRP-Status | Registration | Dynamic VLAN Creation
-----+-----+-----+-----
gi1 Disabled Normal Enabled
gi 2 Disabled Normal Enabled
gi 3 Disabled Normal Enabled
gi 4 Disabled Normal Enabled
gi 5 Disabled Normal Enabled
gi 6 Disabled Normal Enabled
gi 7 Disabled Normal Enabled
--More--
```





## 4.10 IGMP Snooping

### 4.10.1 Ip igmp snooping

**Command:**

```
ip igmp snooping
no ip igmp snooping
```

**Mode:**

Global Configuration

**Usage Guide:**

'no ip igmp snooping' will clear all ip igmp snooping dynamic group and dynamic router port, and make the static ip igmp group invalid. Then do not learning the dynamic group and router port by igmp message.

The configure can use 'show ip igmp snooping'.

**Example:**

The following example specifies that set ip igmp snooping test.

```
Switch(config)# ip igmp snooping
Switch# show ip igmp snooping
IGMP Snooping Status

Snooping : Enabled
Report Suppression : Enabled
Operation Version : v2
Forward Method : mac
Unknown Multicast Action : Flood
Switch(config)# no ip igmp snooping
Switch# show ip igmp snooping
```

### 4.10.2 ip igmp snooping report-suppression

**Command:**

```
ip igmp snooping report-suppression
```

```
no ip igmp snooping report-suppression
```

**Default:**

ip igmp snooping report-suppression

**Mode:**

Global Configuration

**Usage Guide:**

'no ip igmp snooping report-suppression' will disable igmp v1/v2 igmp report suppression function. So when receive report will forward to the vlan router ports.

The configure can use 'show ip igmp snooping'.

**Example:**

The following example specifies that disable ip igmp snooping report-suppression test.

```
Switch(config)# no ip igmp snooping report-suppression
Switch# show ip igmp snooping
IGMP Snooping Status

Snooping : Enabled
Report Suppression : Disabled
Operation Version : v2
Forward Method : mac
Unknown Multicast Action : Flood
```

### 4.10.3 ip igmp snooping version

**Command:**

```
ip igmp snooping version (2|3)
```

**Parameter:**

(2|3) IP igmp snooping running version 2 or 3

**Default:**

ip igmp snooping version 2

**Mode:**

Global Configuration

**Usage Guide:**

'ip igmp snooping version 3', then will support v3 basic mode. When change version from v3 to v2. the all querier version will update to version 2.

The configure can use 'show ip igmp snooping'.

**Example:**

The following example specifies that set ip igmp snooping version 3 test.

```
Switch(config)# ip igmp snooping version 3
Switch# show ip igmp snooping
IGMP Snooping Status

Snooping : Enabled
Report Suppression : Disabled
Operation Version : v3
Forward Method : mac
Unknown Multicast Action : Flood
```

## 4.10.4 ip igmp snooping unknown-multicast action

**Command:**

```
ip igmp snooping unknown-multicast action (drop | flood |router-port)
```

**Parameter:**

**(drop | flood**            Unknown multicast action for drop|flood|router-port  
**|router-port)**

**Default:**

ip igmp snooping unknown-multicast action flood

**Mode:**

Global Configuration

**Usage Guide:**

When igmp snooping and mld snooping disabled, it can't set action router-port.

When disable igmp snooping & mld snooping, it set unknown multicast action flood.

When action is router-port to flood or drop, it will delete the unknown multicast group entry.

The configure can use 'show ip igmp snooping'.

**Example:**

The following example specifies that set ip igmp unknown multicast action router-port test.

```

Switch(config)# ip igmp snooping
Switch(config)# ip igmp snooping unknown-multicast action router-port
Switch# show ip igmp snooping
IGMP Snooping Status

Snooping : Enabled
Report Suppression : Disabled
Operation Version : v2
Forward Method : mac
Unknown Multicast Action : Router Port
Switch(config)# no ip igmp snooping
Switch# show ip igmp snooping
IGMP Snooping Status

Snooping : Disabled
Report Suppression : Disabled
Operation Version : v2
Forward Method : mac
Unknown Multicast Action : Flood

```

## 4.10.5 ip igmp snooping forward-method

**Command:**

```

ip igmp snooping forward-method (mac |src-dst-ip)

```

**Parameter:**

(mac |src-dst-ip) Multicast lookup method is DMAC OR DIP+SIP

**Default:**

ip igmp snooping forward-method mac

**Mode:**

Global Configuration

**Usage Guide:**

When change lookup method, it will remove all groups.

The configure can use 'show ip igmp snooping'.

**Example:**

The following example specifies that set ip igmp lookup method is src-dst-ip test.

```
Switch(config)# aaa authentication login test1 tacacs+ radius local
Switch(config)# ip igmp forward-method src-dst-ip
Switch# show ip igmp snooping
IGMP Snooping Status

Snooping : Disabled
Report Suppression : Disabled
Operation Version : v2
Forward Method : src-dst-ip
```

## 4.10.6 ip igmp snooping querier

**Command:**

```
ip igmp snooping vlan <VLAN-LIST> querier

no ip igmp snooping [vlan <VLAN-LIST>] querier

ip igmp snooping vlan <VLAN-LIST> querier version (2|3)
```

**Parameter:**

- <VLAN-LIST>** specifies VLAN ID list to set
- (2|3)** Query version 2 or 3

**Mode:**

Global Configuration

**Usage Guide:**

When enable ip igmp vlan querier, there will process router select, the select successful will send general and specific query.

The configure can use 'show ip igmp snooping querier'.

**Example:**

The following example specifies that set ip igmp snooping querier test.

Test must be create static vlan firstly.

```
Switch(config)# vlan 2
Switch(config-vlan)# exit
Switch(config)# ip igmp snooping vlan 2 querier
Switch(config)#exit
Switch#show ip igmp snooping querier
VID | State | Status | Version | Querier IP
-----+-----+-----+-----+-----
1 | Disabled | Non-Querier | No | -----
2 | Enabled | Querier | v2 | 192.168.1.254
Switch#configure
Switch(config)#ip igmp snooping version 3
Switch(config)# ip igmp snooping vlan 2 querier version 3
Switch(config)#do show ip igmp snooping queier
VID | State | Status | Version | Querier IP
-----+-----+-----+-----+-----
1 | Disabled | Non-Querier | No | -----
2 | Enabled | Querier | v3 | 192.168.1.254
Switch(config)#no ip igmp snooping queier
Switch(config)#do show ip igmp snooping queier
```

## 4.10.7 ip igmp snooping vlan

**Command:**

```
ip igmp snooping vlan VLAN-LIST
no ip igmp snooping vlan VLAN-LIST
```

**Parameter:**

**VLAN-LIST** specifies VLAN ID list to set

**Default:**

no ip igmp snooping vlan 1-4094

**Mode:**

Global Configuration

**Usage Guide:**

'no ip igmp snooping vlan 1' will clear vlan all ip igmp snooping dynamic group and dynamic router port, and make the static ip igmp group invalid with vlan ID is vlan 1. Then do not learning the dynamic group and router port by igmp message for vlan 1.

The configure can use show ip igmp snooping vlan 1.

**Example:**

The following example specifies that set ip igmp snooping vlan test.

Test must be enable ip igmp snooping firstly.

```
Switch(config)# ip igmp snooping
Switch(config)# ip igmp snooping vlan 1
Switch# show ip igmp snooping vlan 1
IGMP Snooping is globally enabled
IGMP Snooping VLAN 1 admin : enabled
IGMP Snooping operation mode : enabled
IGMP Snooping robustness: admin 2 oper 2
IGMP Snooping query interval: admin 125 sec oper 125 sec
IGMP Snooping query max response : admin 10 sec oper 10 sec
IGMP Snooping last member query counter: admin 2 oper 2
IGMP Snooping last member query interval: admin 1 sec oper 1 sec
IGMP Snooping last immediate leave: disabled
IGMP Snooping automatic learning of multicast router ports: enabled
Switch(config)# no ip igmp snooping vlan 1
Switch# show ip igmp snooping vlan 1
IGMP Snooping is globally enabled
IGMP Snooping VLAN 1 admin : disabled
IGMP Snooping operation mode : disabled
IGMP Snooping robustness: admin 2 oper 2
IGMP Snooping query interval: admin 125 sec oper 125 sec
IGMP Snooping query max response : admin 10 sec oper 10 sec
IGMP Snooping last member query counter: admin 2 oper 2
IGMP Snooping last member query interval: admin 1 sec oper 1 sec
IGMP Snooping last immediate leave: disabled
IGMP Snooping automatic learning of multicast router ports: enabled
```

## 4.10.8 ip igmp snooping vlan parameters



Command:

```

ip igmp snooping vlan <VLAN-LIST> last-member-query-count <1-7>

no ip igmp snooping vlan <VLAN-LIST> last-member-query-count

ip igmp snooping vlan <VLAN-LIST> last-member-query-interval <1-60>

no ip igmp snooping vlan <VLAN-LIST> last-member-query-interval

[no] ip igmp snooping vlan <VLAN-LIST> router learn pim-dvmrp

[no] ip igmp snooping vlan <VLAN-LIST> fastleave

ip igmp snooping vlan <VLAN-LIST> query-interval <30-18000>

no ip igmp snooping vlan <VLAN-LIST> query-interval

ip igmp snooping vlan <VLAN-LIST> response-time <5-20>

no ip igmp snooping vlan <VLAN-LIST> response-time

ip igmp snooping vlan <VLAN-LIST> robustness-variable <1-7>

no ip igmp snooping vlan <VLAN-LIST> robustness-variable

```

Parameter:

- VLAN-LIST** specifies VLAN ID list to set
- last-member-query-count <1-7>** specifies last member query count to set. Default is 2
- last-member-query-interval <1-60>** specifies last member query interval to set. Default is 1
- query-interval <30-18000>** specifies query interval to set. Default is 125
- response-time <5-20>** specifies a response time to set. default is 10
- robustness-variable <1-7>** specifies a robustness value to set, default is 2

**Default:**

```
no ip igmp snooping vlan 1-4094 last-member-query-count
no ip igmp snooping vlan 1-4094 last-member-query-interval
ip igmp snooping vlan 1-4094 router learn pim-dvmrp
no ip igmp snooping vlan 1-4094 fastleave
no ip igmp snooping vlan 1-4094 query-interval
no ip igmp snooping vlan 1-4094 response-time
no ip igmp snooping vlan 1-4094 robustness-variable
```

**Mode:**

Global Configuration

**Usage Guide:**

'no ip igmp snooping vlan 1 (last-member-query-count | last-member-query-interval | query-interval | response-time | robustness-variable)' will set the vlan parameters to default.

The cli setting will change the ip igmp vlan parameters admin settings.

The configure can use show ip igmp snooping vlan 1.

**Example:**

The following example specifies that set ip igmp snooping vlan parameters test.

```
Switch(config)# ip igmp snooping vlan 1 fastleave
Switch(config)# ip igmp snooping vlan 1 last-member-query-count 5
Switch(config)# ip igmp snooping vlan 1 last-member-query-interval 3
Switch(config)# ip igmp snooping vlan 1 query-interval 100
Switch(config)# ip igmp snooping vlan 1 response-time 12
Switch(config)# ip igmp snooping vlan 1 robustness-variable 4
Switch# show ip igmp snooping vlan 1
IGMP Snooping is globally enabled
IGMP Snooping VLAN 1 admin : enabled
IGMP Snooping operation mode : enabled
IGMP Snooping robustness: admin 4 oper 2
IGMP Snooping query interval: admin 100 sec oper 125 sec
IGMP Snooping query max response : admin 12 sec oper 10 sec
IGMP Snooping last member query counter: admin 5 oper 2
IGMP Snooping last member query interval: admin 3 sec oper 1 sec
IGMP Snooping last immediate leave: enabled
IGMP Snooping automatic learning of multicast router ports: enabled
```

## 4.10.9 ip igmp snooping static port

**Command:**

```
[no] ip igmp snooping vlan <VLAN-LIST> static-port IF_PORTS
```

```
[no] ip igmp snooping vlan <VLAN-LIST> forbidden-port IF_PORTS
```

**Parameter:**

**VLAN-LIST** specifies VLAN ID list to set  
**IF\_PORTS** specifies a port list to set or remove

**Default:**

None static/forbidden ports

**Mode:**

Global Configuration

**Usage Guide:**

'ip igmp snooping vlan 1 static-port gi1-2' will add static port gi1-2 for vlan 1.the all known vlan 1 ipv4 group will add the static ports.

'ip igmp snooping vlan 1 forbidden-port gi3-4' will add forbidden port gi3-4 for vlan 1.the all known vlan 1 ipv4 group will remove the forbidden ports.

The configure can use 'show ip igmp snooping forward-all'.

**Example:**

The following example specifies that set ip igmp snooping static/forbidden port test.

```
Switch(config)# ip igmp snooping vlan 1 static -port gi1-2
Switch(config)# ip igmp snooping vlan 1 forbidden -port gi3-4
Switch# show ip igmp snooping forward-all vlan 1
IGMP Snooping VLAN : 1
IGMP Snooping static port : gi1-2
IGMP Snooping forbidden port : gi3-4
```

## 4.10.10 ip igmp snooping vlan static router port

**Command:**

```
[no] ip igmp snooping vlan <VLAN-LIST> static-router-port IF_PORTS
```

```
[no] ip igmp snooping vlan <VLAN-LIST> forbidden-router-port IF_PORTS
```

**Parameter:**

**VLAN-LIST** specifies VLAN ID list to set  
**IF\_PORTS** specifies a port list to set or remove

**Default:**

None static/forbidden router ports

**Mode:**

Global Configuration

**Usage Guide:**

'ip igmp snooping vlan 1 static-router-port gi1-2' will add static router port gi1-2 for vlan 1.  
 'ip igmp snooping vlan 1 forbidden-router-port gi2' will add forbidden router port gi2 for vlan 1.  
 This will also remove gi2 from static router port. The forbidden router port receive query will not forward.  
 The configure can use 'show ip igmp snooping router'.

**Example:**

The following example specifies that set ip igmp snooping static/forbidden test.

```
Switch(config)# ip igmp snooping vlan 1 static-router-port gi1-2
Switch(config)# ip igmp snooping vlan 1 forbidden-router-port gi2
Switch# show ip igmp snooping router
Dynamic Router Table
VID | Port | Expiry Time(Sec)
-----+-----+-----
Total Entry 0
Static Router Table
VID | Port Mask
-----+-----
1 | gi1
Total Entry 1
Forbidden Router Table
VID | Port Mask
-----+-----
1 | gi2
Total Entry 1
```

**4.10.11 ip igmp snooping static group**

**Command:**

```
[no] ip igmp snooping vlan <VLAN-LIST> static-group <ip-addr> interfaces
IF_PORTS

[no] ip igmp snooping vlan <VLAN-LIST> group <ip-addr>

show ip igmp snooping groups [(dynamic | static)]

clear ip igmp snooping groups [(dynamic | static)]
```

**Parameter:**

- VLAN-LIST** specifies VLAN ID list to set
- ip-addr** specifies multicast group ipv4 address
- IF\_PORTS** specifies port list to set or remove

**Mode:**

Global Configuration

**Usage Guide:**

'ip igmp snooping vlan 1 static-group 224.1.1.1 interfaces gi1' will add static group.  
 The static group will not learning others dynamic port. If the dynamic group exist, then the static group will overlap the dynamic group. If remove the last member of static group, the static group will be delete.  
 The static group want to valid , must igmp snooping vlan enable and ip igmp snooping enable.  
 The configure can use 'show ip igmp snooping group [(dynamic | static)]' to display. And can use 'no ip igmp snooping vlan 1 group 224.1.1.1' to delete the static group. Also can use 'clear ip igmp snooping groups' to delete the static group.

**Example:**

The following example specifies that set ip igmp snooping static group test.

```
Switch(config)# ip igmp snooping vlan 1 static-group 224.1.1.1 interfaces gi1-2
Switch# show ip igmp snooping groups
VLAN | Gourp IP Address | Type | Life(Sec) | Port
-----+-----+-----+-----+-----
1 | 224.1.1.1 | Static| -- | gi1-2
Total Number of Entry = 1
Switch# clear ip igmp snooping groups static
Switch# show ip igmp snooping groups
VLAN | Gourp IP Address | Type | Life(Sec) | Port
-----+-----+-----+-----+-----
```

|                           |
|---------------------------|
| Total Number of Entry = 0 |
|---------------------------|

## 4.10.12 ip igmp profile

### Command:

|                                                                                                                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------|
| <pre>ip igmp profile &lt;1-128&gt;  profile range ip &lt;ip-addr&gt; [ip-addr] action (permit   deny)  show ip igmp profile [&lt;1-128&gt;]</pre> |
|---------------------------------------------------------------------------------------------------------------------------------------------------|

### Parameter:

|                        |                                                                                                                             |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| <b>&lt;1-128&gt;</b>   | specifies profile ID                                                                                                        |
| <b>&lt;ip-addr&gt;</b> | Start ipv4 multicast address                                                                                                |
| <b>[ip-addr]</b>       | End ipv4 multicast address                                                                                                  |
| <b>(permit   deny)</b> | Permit: allow Multicast address range ip address learning<br>deny: do not allow Multicast address range ip address learning |

### Mode:

```
ip igmp profile <1-128>
Global Configuration
profile range ip <ip-addr> [ip-addr] action (permit | deny)
igmp profile config mode
```

### Usage Guide:

Use 'ip igmp profile 1' entry to the igmp profile config mode.

User 'profile range ip 224.1.1.1 224.1.1.8 action permit' to configure the profile entry.

The profile entry is used by port filter.

The configure can use 'show ip igmp profile [<1-128>]' to display

### Example:

The following example specifies that set ip igmp profile test.

|                                                                                                                                                                                                        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <pre>Switch(config)# ip igmp profile 1 Switch(config-igmp-profile)# profile range ip 224.1.1.1 224.1.1.8 action permit Switch(config-igmp-profile)#show ip igmp profile IP igmp profile index: 1</pre> |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

```

IP igmp profile action: permit
Range low ip: 224.1.1.1
Range high ip: 224.1.1.8
Switch(config-igmp-profile)#exit
Switch(config)# ip igmp profile 10
Switch(config-igmp-profile)# profile range ip 224.1.1.5 224.1.1.10 action deny
Switch(config-igmp-profile)#show ip igmp profile
IP igmp profile index: 10
IP igmp profile action: deny
Range low ip: 224.1.1.5
Range high ip: 224.1.1.10
Switch(config-igmp-profile)#exit
Switch(config)# exit
Switch# show ip igmp profile
IP igmp profile index: 1
IP igmp profile action: permit
Range low ip: 224.1.1.1
Range high ip: 224.1.1.8
IP igmp profile index: 10
IP igmp profile action: deny
Range low ip: 224.1.1.5
Range high ip: 224.1.1.10

```

### 4.10.13 ip igmp filter

**Command:**

```

ip igmp filter <1-128>

[no] ip igmp filter

show ip igmp filter [interfaces IF_PORTS]

```

**Parameter:**

|                              |                                 |
|------------------------------|---------------------------------|
| <b>&lt;1-128&gt;</b>         | specifies profile ID            |
| <b>[interfaces IF_PORTS]</b> | Specifies interfaces to display |

**Mode:**

Interface Configuration

**Usage Guide:**

After create ip igmp profile entry. Can use 'ip igmp filter 1' to bind a profile for port.

When the port bind a profile. Then the port learning group will update, if the group is not match the profile rule it will remove the port from the group. static group is excluded.

The configure can use 'show ip igmp filter ' to display

**Example:**

The following example specifies that set ip igmp filter test.

The configure must create ip igmp profile firstly.

```
Switch(config)# ip igmp profile 1
Switch(config-igmp-profile)# profile range ip 224.1.1.1 224.1.1.8 action permit
Switch(config-igmp-profile)#exit
Switch(config)# interface gi1
Switch(config-if)#ip igmp filter 1
Switch(config-if)#exit
Switch(config)# exit
Switch# show ip igmp filter
Port ID | Profile ID
-----+-----
gi1 : 1
gi2 : None
gi3 : None
--More--
```

## 4.10.14 ip igmp max-group

**Command:**

```
ip igmp max-groups <0-256>

no ip igmp max-groups

ip igmp max-groups action (deny | replace)

show ip igmp max-group [interfaces IF_PORTS]
```



**show ip igmp max-group action [interfaces IF\_PORTS]**

**Parameter:**

- <1-128>** specifies profile ID
- (deny | replace)** Deny: current port igmp group arrived max-groups, don't add group.  
Replace: current port igmp group arrived max-groups, remove port for rand group, and add port to new group.

**Default:**

no ip igmp max-groups  
ip igmp max-groups action deny

**Mode:**

Interface Configuration

**Usage Guide:**

use 'ip igmp max-groups 10' to limit port learning max group num is 10.  
When the port had learned more than 10 groups, then the more than 10 group will be remove the port form group.  
static group is excluded.  
The configure can use 'show ip igmp max-group & show ip igmp max-group action ' to display

**Example:**

The following example specifies that set ip igmp max-groups and action is replace test.

```
Switch(config)# interface gi1
Switch(config-if)#ip igmp max-groups 10
Switch(config-if)#ip igmp max-groups action replace
Switch(config-if)#exit
Switch(config)# exit
Switch# show ip igmp max-group
Port ID | Max Group
-----+-----
gi1 : 10
gi2 : 256
gi3 : 256
--More--
Switch# show ip igmp max-group action
Port ID | Max-groups Action
-----+-----
gi1 : replace
gi2 : deny
```

```
gi3 : deny
gi4 : deny
gi5 : deny
gi6 : deny
--More--
```

## 4.10.15 clear ip igmp snooping groups

### Command:

```
clear ip igmp snooping groups [(dynamic | static)]
```

### Parameter:

**(dynamic | static)** IP igmp group type is dynamic or static

### Mode:

Privileged Configuration

### Usage Guide:

This command will clear the ip igmp groups for dynamic or static or all of type.

The configure can use 'show ip igmp snooping groups' to check.

### Example:

The following example specifies that clear ip igmp snooping groups test.

```
Switch# clear ip igmp snooping groups static
Switch# show ip igmp snooping groups
Switch# clear ip igmp snooping groups
Switch# show ip igmp snooping groups
```

## 4.10.16 clear ip igmp snooping statistics

### Command:

```
clear ip igmp snooping statistics
```

**Mode:**

Privileged Configuration

**Usage Guide:**

This command will clear the igmp statistics.

The configure can use show ip igmp snooping.

**Example:**

The following example specifies that clear ip igmp snooping statistics test.

```
Switch# clear ip igmp snooping statistics
Switch# show ip igmp snooping
```

## 4.10.17 show ip igmp snooping counters

**Command:**

```
show ip igmp snooping groups counters
```

**Mode:**

Privileged Configuration

**Usage Guide:**

This command will display the ip igmp group counter include static group.

**Example:**

The following example specifies that display ip igmp snooping group counter test.

```
Switch# show ip igmp snooping counters
Total ip igmp snooping group number: 0
```

## 4.10.18 show ip igmp snooping groups

**Command:**

```
show ip igmp snooping groups [(dynamic | static)]
```

**Parameter:**

**(dynamic | static)** Display Ip igmp group type is dynamic or static

**Mode:**

Privileged Configuration

**Usage Guide:**

This command will display the ip igmp groups for dynamic or static or all of type.

**Example:**

The following example specifies that show ip igmp snooping groups test.

```
Switch# show ip igmp snooping groups
Switch# show ip igmp snooping groups dynamic
Switch# show ip igmp snooping groups static
```

## 4.10.19 show ip igmp snooping router

**Command:**

```
show ip igmp snooping router [(dynamic | forbidden |static)]
```

**Parameter:**

**(dynamic | forbidden | static)** Display Ip igmp router info for different type

**Mode:**

Privileged Configuration

**Usage Guide:**

This command will display the ip igmp router info.

**Example:**

The following example specifies that show ip igmp snooping router test.

```
Switch# show ip igmp snooping router
Switch# show ip igmp snooping router dynamic
Switch# show ip igmp snooping rotuer static
Switch# show ip igmp snooping rotuer forbidden
```

## 4.10.20 show ip igmp snooping querier

**Command:**

```
show ip igmp snooping querier
```

**Mode:**

Privileged Configuration

**Usage Guide:**

This command will display all of the static vlan ip igmp querier info.

**Example:**

The following example specifies that show ip igmp snooping querier test.

```
Switch# show ip igmp snooping querier
VID | State | Status | Version | Querier IP
-----+-----+-----+-----+-----
1 | Disabled | Non-Querier | No | -----
Total Entry 1
```

## 4.10.21 show ip igmp snooping

**Command:**

```
show ip igmp snooping
```

**Mode:**

Privileged Configuration

**Usage Guide:**

This command will display ip igmp snooping global info.

**Example:**

The following example specifies that show ip igmp snooping test.

```
Switch# show ip igmp snooping
IGMP Snooping Status

Snooping : Enabled
Report Suppression : Enabled
Operation Version : v2
```

```

Forward Method : mac
Unknown Multicast Action : Flood
Packet Statistics
Total RX : 0
Valid RX : 0
Invalid RX : 0
Other RX : 0
Leave RX : 0
Report RX : 0
General Query RX : 0
Specail Group Query RX : 0
Specail Group & Source Query RX : 0
Leave TX : 0
Report TX : 0
General Query TX : 0
Specail Group Query TX : 0
Specail Group & Source Query TX : 0

```

## 4.10.22 show ip igmp snooping vlan

**Command:**

```
show ip igmp snooping vlan [VLAN-LIST]
```

**Parameter:**

**[VLAN-LIST]** Show specifies vlan ip igmp snooping info

**Mode:**

Privileged Configuration

**Usage Guide:**

This command will display ip igmp snooping vlan info.

**Example:**

The following example specifies that show ip igmp snooping vlan test.

```

Switch# show ip igmp snooping vlan
IGMP Snooping is globaly enabled

```

```
IGMP Snooping VLAN 1 admin : disabled
IGMP Snooping operation mode : disabled
IGMP Snooping robustness: admin 2 oper 2
IGMP Snooping query interval: admin 125 sec oper 125 sec
IGMP Snooping query max response : admin 10 sec oper 10 sec
IGMP Snooping last member query counter: admin 2 oper 2
IGMP Snooping last member query interval: admin 1 sec oper 1 sec
IGMP Snooping last immediate leave: disabled
IGMP Snooping automatic learning of multicast router ports: enabled
```

## 4.10.23 show ip igmp snooping forward-all

**Command:**

```
show ip igmp snooping forward-all [vlan VLAN-LIST]
```

**Parameter:**

[vlan VLAN-LIST] Show specifies vlan of ip igmp forward info.

**Mode:**

Privileged Configuration

**Usage Guide:**

This command will display ip igmp snooping forward all info.

**Example:**

The following example specifies that show ip igmp snooping forward-all test.

```
Switch# show ip igmp snooping forward-all
IGMP Snooping VLAN : 1
IGMP Snooping static port : None
IGMP Snooping forbidden port : None
```

## 4.10.24 show ip igmp profile

**Command:**

```
show ip igmp profile [<1-128>]
```

**Parameter:**

[<1-128>] Show specifies index profile info

**Mode:**

Privileged Configuration

**Usage Guide:**

This command will display ip igmp profile info.

**Example:**

The following example specifies that show ip igmp profile test.

```
Switch# show ip igmp profile
IP igmp profile index: 1
IP igmp profile action: permit
Range low ip: 224.1.1.1
Range high ip: 224.1.1.8
IP igmp profile index: 2
IP igmp profile action: deny
Range low ip: 225.1.1.0
Range high ip: 225.1.2.1
```

## 4.10.25 show ip igmp port filter

**Command:**

```
show ip igmp filter [interfaces IF_PORTS]
```

**Parameter:**

[interfaces IF\_PORTS] Show specifies ports filter

**Mode:**

Privileged Configuration



**Usage Guide:**

This command will display ip igmp port filter info.

**Example:**

The following example specifies that show ip igmp filter test.

```
Switch# show ip igmp filter
Port ID | Profile ID
-----+-----
gi1 : 1
gi2 : None
gi3 : None
gi4 : None
gi5 : None
--More--
```

## 4.10.26 show ip igmp port max-group

**Command:**

```
show ip igmp max-group [interfaces IF_PORTS]
```

**Parameter:**

**[interfaces**            Show specifies ports max-group  
**IF\_PORTS]**

**Mode:**

Privileged Configuration

**Usage Guide:**

This command will display ip igmp port max-group.

**Example:**

The following example specifies that show ip igmp max-group test.

```
Switch(config)# aaa authentication login test1 tacacs+ radius local
Switch(config)#interface gi1
Switch(config-if)#ip igmp max-groups 50
Switch(config-if)#exit
```

```
Switch(config)#exit
Switch# show ip igmp max-group
Port ID | Max Group
-----+-----
gi1 : 50
gi2 : 256
gi3 : 256
gi4 : 256
gi5 : 256
--More--
```

## 4.10.27 show ip igmp port max-group action

**Command:**

```
show ip igmp max-group action [interfaces IF_PORTS]
```

**Parameter:**

**[interfaces**            Show specifies ports max-group action  
**IF\_PORTS]**

**Mode:**

Privileged Configuration

**Usage Guide:**

This command will display ip igmp port max-group action.

**Example:**

The following example specifies that show ip igmp max-group action test.

```
Switch(config)#interface gi1
Switch(config-if)#ip igmp max-groups action replace
Switch(config-if)#exit
Switch(config)#exit
Switch# show ip igmp max-group action
Port ID | Max-groups Action
-----+-----
gi1 : replace
```

```
gi2 : deny
```

```
gi3 : deny
```

```
gi4 : deny
```

```
gi5 : deny
```

```
--More--
```

## 4.11 IP Source Guard

### 4.11.1 ip source verify

#### Command:

```
ip source verify

ip source verify mac-and-ip

no ip source verify
```

#### Mode:

Interface Configuration

#### Usage Guide:

Use the **ip source verify** command to enable IP Source Guard function. Default IP Source Guard filter source IP address. The "**mac-and-ip**" filters not only source IP address but also source IP address. Use the **no** form of this command to disable

#### Example:

The example shows how to enable IP Source Guard with source IP address filtering on interface gi1.

```
Switch(config)# interface gi1
switch(config-if)# ip source verify
```

The example shows how to enable IP Source Guard with source IP and MAC address filtering on interface gi2. You can verify settings by the following **show ip source interfaces** command.

```
Switch(config)# interface gi2
switch(config-if)# ip source verify mac-and-ip
switch(config-if)# do show ip source interfaces gi1-2
Port | Status | Max Entry | Current Entry
-----+-----+-----+-----
gi1 | Verify MAC+IP | No Limit | 0
gi2 | disabled | No Limit | 0
```

## 4.11.2 ip source binding

### Command:

```
ip source binding A:B:C:D:E:F vlan <1-4094> A.B.C.D interface IF_PORT

no ip source binding A:B:C:D:E:F vlan <1-4094> A.B.C.D interface IF_PORT
```

### Parameter:

**A:B:C:D:E:F** Specify a MAC address of a binding entry

**VLAN <1-4094>** Specify a VLAN ID of a binding entry

**A.B.C.D** Specify IP address and MASK of a binding entry.

**IF\_PORT** Specify interface of a binding entry.

### Mode:

Global Configuration

### Usage Guide:

Use the **ip source binding** command to create a static IP source binding entry has an IP address, its associated MAC address 、 VLAN ID 、 interface. Use the **no** form of this command to delete static entry.

### Example:

The example shows how to add a static IP source binding entry. You can verify settings by the following **show ip source binding** command.

```
Switch(config)# ip source binding 00:11:22:33:44:55 vlan 1 192.168.1.55 interface gi1
switch(config)# do show ip source binding

Bind Table: Maximun Binding Entry Number 192
Port | VID | MAC Address | IP | Type | Lease Time
-----+-----+-----+-----+-----+-----
gi1 | 1 | 00:11:22:33:44:55 | 192.168.1.55(255.255.255.255)| Static | NA
```

## 4.11.3 show ip source interface

### Command:

```
show ip source interfaces IF_PORTS
```

**Parameter:**

**IF\_PORTS** specifies ports to show

**Mode:**

Global Configuration

**Usage Guide:**

Use the **show ip source interface** command to show settings of IP Source Guard of interface

**Example:**

The example shows how to show settings of IP Source Guard of interface gi1

```
switch# show ip source interfaces gi1
Port | Status | Max Entry | Current Entry
-----+-----+-----+-----
gi1 | Verify MAC+IP | No Limit | 0
```

## 4.11.4 show ip source binding

**Command:**

```
show ip source binding [(dynamic|static)]
```

**Parameter:**

**dynamic** Show entries that added by DHCP snooping learn  
**static** Show entries that added by user

**Mode:**

Global Configuration

**Usage Guide:**

Use the **show ip source binding** command to show binding entries of IP Source Guard.

**Example:**

The example shows how to show static binding entries of IP Source Guard.

```
switch# show ip source binding
Bind Table: Maximun Binding Entry Number 192
Port | VID | MAC Address | IP | Type | Lease Time
-----+-----+-----+-----+-----+-----
```

```
gi1 | 1 | 00:11:22:33:44:55 | 192.168.1.55(255.255.255.255)| Static | NA
```

## 4.12 Link Aggregation

### 4.12.1 lag load-balance

#### Command:

```
lag load-balance (src-dst-mac | src-dst-mac-ip)
```

#### Parameter:

- src-dst-mac** Specify algorithm to balance traffic by using source and destination MAC address for all packets.
- src-dst-mac-ip** Specify algorithm to balance traffic by using source and destination IP address for IP packets and using source and destination MAC address for non-IP packets.

#### Default:

Default load balance algorithm is src-dst-mac

#### Mode:

Global Configuration

#### Usage Guide:

Link aggregation group port should transmit packets spread to all ports to balance traffic loading. There are two algorithm supported and this command allow you to select the algorithm.

#### Example:

This example shows how to change load balance algorithm to src-dst-mac-ip.

```
Switch(config)# lag load-balance src-dst-mac-ip
```

This example shows how to show current load balance algorithm.

```
Switch# show lag
Load Balancing: src-dst-mac-ip.
Group ID | Type | Ports
-----+-----+-----
 1 | ----- |
 2 | ----- |
 3 | ----- |
 4 | ----- |
 5 | ----- |
```



```
6 | ----- |
7 | ----- |
8 | ----- |
```

## 4.12.2 lacp system-priority

### Command:

```
lacp system-priority <1-65535>

no lacp system-priority
```

### Parameter:

**<1-65535>** Specify system priority value

### Default:

Default system priority is 1.

### Mode:

Global Configuration

### Usage Guide:

LACP system priority is used for two connected DUT to select master switch. Lower system priority value has higher priority. And the DUT with higher priority can decide which ports are able to join the LAG.

Use “**no lacp system-priority**” to restore to the default priority value. The only way to show this configuration is using “**show running-config**” command.

### Example:

This example shows how to configure lacp system priority to 1000.

```
Switch(config)# lacp system-priority 1000
```

## 4.12.3 lacp port-priority

### Command:

```
lacp port-priority <1-65535>
```

### Parameter:

**<1-65535>** Specify port priority value

**Default:**

Default port priority is 1.

**Mode:**

Interface Configuration

**Usage Guide:**

LACP port priority is used for two connected DUT to select aggregation ports. Lower port priority value has higher priority. And the port with higher priority will be selected into LAG first.

The only way to show this configuration is using “**show running-config**” command.

**Example:**

This example shows how to configure interface fa1 lacp port priority to 100.

```
Switch(config)# interface gi1
Switch(config-if)# lacp port-priority 100
```

## 4.12.4 lacp timeout

**Command:**

```
lacp timeout (long | short)
```

**Parameter:**

|              |                                    |
|--------------|------------------------------------|
| <b>long</b>  | Send LACP packet every 30 seconds. |
| <b>short</b> | Send LACP packet every 1 seconds.  |

**Default:**

Default LACP timeout is long.

**Mode:**

Interface Configuration

**Usage Guide:**

LACP need to send LACP packet to partner switch to check the link status. This command configure the interval of sending LACP packets.

The only way to show this configuration is using “**show running-config**” command.

**Example:**

This example shows how to configure interface gi1 lacp timeout to short.

```
Switch(config)# interface gi1
Switch(config-if)# lacp timeout short
```

## 4.12.5 lag

### Command:

```
lag <1-8> mode (static | active | passive)

no lag
```

### Parameter:

|                    |                                                                                                 |
|--------------------|-------------------------------------------------------------------------------------------------|
| <b>&lt;1-8&gt;</b> | Specify the LAG id for the interface                                                            |
| <b>static</b>      | Specify the LAG to be static mode and join the interface into this LAG.                         |
| <b>active</b>      | Specify the LAG to be dynamic mode and join the interface into this LAG with LACP active port.  |
| <b>passive</b>     | Specify the LAG to be dynamic mode and join the interface into this LAG with LACP passive port. |

### Mode:

Interface Configuration

### Usage Guide:

Link aggregation group function allows you to aggregate multiple physical ports into one logic port to increase bandwidth. This command makes normal port join into the specific LAG logic port with static or dynamic mode. And use “no lag” to leave the LAG logic port.

### Example:

This example shows how to create a dynamic LAG and join gi1-gi3 to this LAG.

```
Switch(config)# lag load-balance src-dst-mac-ip
Switch(config)# interface range gi1-3
Switch(config-if)# lag 1 mode active
```

This example shows how to show current LAG status.

```
Switch# show lag
```

```

Load Balancing: src-dst-mac-ip.
Group ID | Type | Ports
-----+-----+-----
1 | LACP | Inactive: gi1-3
2 | ----- |
3 | ----- |
4 | ----- |
5 | ----- |
6 | ----- |
7 | ----- |
8 | ----- |

```

## 4.12.6 show lag

**Command:**

```

Show lag

```

**Mode:**

Privileged Configuration

**Usage Guide:**

Use “**show lag**” command to show current LAG load balance algorithm and members active/inactive status.

**Example:**

This example shows how to show current LAG status.

```

Switch# show lag
Load Balancing: src-dst-mac-ip.
Group ID | Type | Ports
-----+-----+-----
1 | LACP | Inactive: gi1-3
2 | ----- |
3 | ----- |
4 | ----- |
5 | ----- |
6 | ----- |
7 | ----- |

```

8 | ----- |

## 4.13 LLDP

### 4.13.1 lldp

**Command:**

```
lldp
```

```
no lldp
```

**Mode:**

Global Configuration

**Usage Guide:**

The “lldp” command globally enable LLDP RX/TX ability. “no lldp run” command disables the LLDP RX/TX ability and the behavior when receiving LLDP PDU would be decided by “lldp lldpdu” command. The LLDP enable status is displayed by “show lldp” command.

**Example:**

The following example sets LLDP enable/disable.

```
Switch(config)# lldp
Switch# show lldp
State: Enabled
Timer: 30 Seconds
Hold multiplier: 4
Reinit delay: 2 Seconds
Tx delay: 2 Seconds
LLDP packet handling: Flooding
Switch(config)# no lldp
Switch# show lldp
State: Disabled
Timer: 30 Seconds
Hold multiplier: 4
Reinit delay: 2 Seconds
Tx delay: 2 Seconds
LLDP packet handling: Flooding
```

## 4.13.2 Ildp tx-interval

### Command:

```
Ildp tx-interval <5-32768>
```

### Parameter:

**<5-32768>** Specify the LLDP PDU TX interval in unit of second.

### Default:

Ildp tx-interval 30

### Mode:

Global Configuration

### Usage Guide:

This command globally configures the LLDP TX interval. It should be noticed that both “Ildp tx-interval” and “Ildp tx-delay” affects the LLDP PDU TX time. The larger value of the two configuration decides the TX interval. The configuration could be shown by “show Ildp” command.

### Example:

This example sets LLDP TX interval to 10 seconds.

```
Switch(config)# Ildp tx-interval 10
Switch# show Ildp
State: Disabled
Timer: 10 Seconds
Hold multiplier: 4
Reinit delay: 2 Seconds
Tx delay: 2 Seconds
LLDP packet handling: Flooding
```

## 4.13.3 Ildp reinit-delay

### Command:

```
Ildp reinit-delay <1-10>
```

### Parameter:

**<1-10>** Specify the LLDP re-initial delay time in unit of second.

**Default:**

lldp reinit-delay 2

**Mode:**

Global Configuration

**Usage Guide:**

This command globally configures the LLDP re-initial delay. This delay avoids LLDP generate too many PDU if the port is up and down frequently. The delay starts to count when the port links down. The port would not generate LLDP PDU until the delay counts to zero. The configuration could be shown by "show lldp" command.

**Example:**

This example sets LLDP re-initial delay to 5 seconds.

```
Switch(config)# lldp reinit-delay 5
Switch# show lldp
State: Disabled
Timer: 10 Seconds
Hold multiplier: 4
Reinit delay: 5 Seconds
Tx delay: 2 Seconds
LLDP packet handling: Flooding
```

## 4.13.4 lldp holdtime-multiplier

**Command:**

```
lldp holdtime-multiplier <2-10>
```

**Parameter:**

**<2-10>** Specify the LLDP hold time multiplier.

**Default:**

lldp holdtime-multiplier 4

**Mode:**

Global Configuration

**Usage Guide:**



This command globally configures the LLDP PDU hold multiplier that decides time-to-live (TTL) value sent in LLDP advertisements:  $TTL = (tx\text{-interval} * holdtime\text{-multiplier})$ . The configuration could be shown by “show lldp” command.

**Example:**

This example sets LLDP hold time multiplier to 3.

```
Switch(config)# lldp holdtime-multiplier 3
Switch# show lldp
State: Disabled
Timer: 10 Seconds
Hold multiplier: 3
Reinit delay: 2 Seconds
Tx delay: 2 Seconds
LLDP packet handling: Flooding
```

## 4.13.5 lldp tx-delay

**Command:**

```
lldp tx-delay <1-8192>
```

**Parameter:**

**<1-8192>** Specify the LLDP tx delay in unit of seconds.

**Default:**

lldp tx-delay 2

**Mode:**

Global Configuration

**Usage Guide:**

This command globally configures the delay in seconds between successive LLDP frame transmissions. The delay starts to count in any case LLDP PDU is sent such as by LLDP PDU advertise routine, LLDP PDU content change, port link up, etc. The configuration could be shown by “show lldp” command.

**Example:**

This example sets LLDP PDU TX delay to 10.

```
Switch(config)# lldp tx-delay 10
Switch# show lldp
```

```

State: Disabled
Timer: 10 Seconds
Hold multiplier: 4
Reinit delay: 2 Seconds
Tx delay: 10 Seconds
LLDP packet handling: Flooding

```

## 4.13.6 lldp tlv-select

### Command:

```

lldp tlv-select TLV [TLV] [TLV] [TLV] [TLV] [TLV] [TLV] [TLV]
no lldp tlv-select

```

### Parameter:

**TLV** Specify the selected optional TLV. Available optional TLVs are : sys-name (system name), sys-desc (system description), sys-cap (system capability), mac-phy (802.3 MAC-PHY), lag (802.3 link aggregation), max-frame-size (802.3 max frame size), and management-addr (management address).

### Mode:

Interface Configuration

### Usage Guide:

This command per port configures the selected TLV attaching in PDU. The “no lldp tlv-select” command would remove all selected TLV. The configuration could be shown by “show lldp” command.

### Example:

This example selects system name, system description, system capability, 802.3 MAC-PHY, 802.3 link aggregation, 802.3 max frame size, and management address TLVs for interface gi1 and gi3.

```

Switch(config)# interface range gi 1,3
Switch(config-if-range)# lldp tlv-select port-desc sys-name sys-desc sys-cap mac-phy
lag max-frame-size management-addr
Switch(config-if-range)# exit
Switch(config)# show lldp interfaces gi1,3
State: Disabled
Timer: 10 Seconds

```

```

Hold multiplier: 3
Reinit delay: 2 Seconds
Tx delay: 2 Seconds
LLDP packet handling: Flooding
Port | State | Optional TLVs | Address
-----+-----+-----+-----
gi1 | RX,TX | PD, SN, SD, SC |192.168.1.254
gi3 | RX,TX | PD, SN, SD, SC |192.168.1.254
Port ID: gi1
802.3 optional TLVs: 802.3-mac-phy, 802.3-lag, 802.3-max-frame-size, management-addr
802.1 optional TLVs
PVID: Enabled
Port ID: gi3
802.3 optional TLVs: 802.3-mac-phy, 802.3-lag, 802.3-max-frame-size, management-addr
802.1 optional TLVs
PVID: Enabled

```

## 4.13.7 lldp tlv-select pvid

**Command:**

```
lldp tlv-select pvid (disable|enable)
```

**Parameter:**

**(disable|enable)** Specifies the LLDP 802.1 PVID TLV attach enable status.

**Default:**

lldp tlv-select pvid enable

**Mode:**

Interface Configuration

**Usage Guide:**

This command per port configures the 802.1 PVID TLV attach enable status. The configuration could be shown by “show lldp” command.

**Example:**

This example sets port gi1 PVID TLV attach status to disable and port gi2 to enable.

```

Switch(config)# interface gi1
Switch(config-if-range)# lldp tlv-select pvid disable
Switch(config-if-range)# exit
Switch(config)# interface gi2
Switch(config-if-range)# lldp tlv-select pvid enable
Switch(config-if-range)# exit
Switch(config)# show lldp interfaces gi1,gi2

State: Disabled
Timer: 10 Seconds
Hold multiplier: 3
Reinit delay: 2 Seconds
Tx delay: 2 Seconds
LLDP packet handling: Flooding
Port | State | Optional TLVs | Address
-----+-----+-----+-----
gi1 | RX,TX | |192.168.1.254
gi2 | RX,TX | |192.168.1.254
Port ID: gi1
802.3 optional TLVs:
802.1 optional TLVs
PVID: Disabled
Port ID: gi2
802.3 optional TLVs:
802.1 optional TLVs
PVID: Enabled

```

## 4.13.8 lldp tlv-select vlan-name

**Command:**

```
lldp tlv-select vlan-name (add|remove) VLAN-LIST
```

**Parameter:**

**(add|remove)** Specifies to add or remove VLAN list for LLDP 802.1 VLAN-NAME TLV.

**VLAN-LIST** Specify VLAN list. The configured ports should be member of all the specified VLANs or the VLAN-LIST is not valid.

**Mode:**

Interface Configuration

**Usage Guide:**

The commands per port configure to add or remove VLAN list for 802.1 VLAN-NAME TLV. The configuration could be shown by “show lldp” command.

**Example:**

This example add VLAN 1, 100, 4000 to VLAN-NAME TLV for port gi10.

```
Switch(config)# vlan 100
Switch(config-vlan)# exit
Switch(config)# vlan 4000
Switch(config-vlan)# exit
Switch(config)# interface gi10
Switch(config-if-range)# switchport trunk allowed vlan add all
Switch(config-if-range)# lldp tlv-select pvid enable
Switch(config-if-range)# exit
Switch(config)# show lldp interfaces gi1,gi2
State: Disabled
Timer: 10 Seconds
Hold multiplier: 3
Reinit delay: 2 Seconds
Tx delay: 2 Seconds
LLDP packet handling: Flooding
Port | State | Optional TLVs | Address
-----+-----+-----+-----
gi1 | RX,TX | |192.168.1.254
gi2 | RX,TX | |192.168.1.254
Port ID: gi1
802.3 optional TLVs:
802.1 optional TLVs
PVID: Disabled
Port ID: gi2
802.3 optional TLVs:
802.1 optional TLVs
PVID: Enabled
```

## 4.13.9 Ildp Ildpdu

### Command:

```
Ildp Ildpdu (filtering|flooding|bridging)
```

### Parameter:

**(filtering|flooding|bridging)** Specifies that when LLDP is globally disabled, received LLDP packets are filtered (dropped), flooded (forwarded to all interfaces) or bridged (flooded to VLAN member ports).

### Default:

Ildp Ildpdu flooding

### Mode:

Global Configuration

### Usage Guide:

This command globally configures the LLDP PDU handling behavior when LLDP is globally disabled. It should be noticed that if LLDP is globally enabled and per port LLDP RX status is configured to disabled, the received LLDP PDU would be dropped instead of taking the global disable behavior. The configuration could be shown by “show Ildp” command.

### Example:

This example sets LLDP disable action to bridging.

```
Switch(config)# Ildp Ildpdu bridging
Switch(config)# show Ildp
State: Enabled
Timer: 30 Seconds
Hold multiplier: 4
Reinit delay: 2 Seconds
Tx delay: 2 Seconds
LLDP packet handling: Bridging
```

## 4.13.10 Ildp tx/rx

### Command:

```
lldp rx
```

```
no lldp rx
```

```
lldp tx
```

```
no lldp tx
```

**Mode:**

Interface Configuration

**Usage Guide:**

The command per port configures the LLDP PDU RX and TX ability. The configuration could be shown by “show lldp” command.

**Example:**

This example sets port gi1 to enable LLDP RX and TX, port gi2 to disable RX but enable TX, port gi3 to enable RX but disable TX, port gi4 to disable RX and TX.

```
Switch(config)# interface gi1
Switch(config-if)# lldp rx
Switch(config-if)# lldp tx
Switch(config-if)# exit
Switch(config)# interface gi2
Switch(config-if)# no lldp rx
Switch(config-if)# lldp tx
Switch(config-if)# exit
Switch(config)# interface gi3
Switch(config-if)# lldp rx
Switch(config-if)# no lldp tx
Switch(config-if)# exit
Switch(config)# interface gi4
Switch(config-if)# no lldp rx
Switch(config-if)# no lldp tx
Switch(config-if)# exit
Switch(config)# show lldp interfaces gi1-4
State: Enabled
Timer: 30 Seconds
Hold multiplier: 4
Reinit delay: 2 Seconds
```

```
Tx delay: 2 Seconds
LLDP packet handling: Bridging
Port | State | Optional TLVs | Address
----- + ----- + ----- + -----
gi1 | RX,TX | |192.168.1.254
gi2 | TX | |192.168.1.254
gi3 | RX | |192.168.1.254
gi4 |Disable | |192.168.1.254
```

### 4.13.11 Ildp med

**Command:**

```
lldp med

no lldp med
```

**Mode:**

Interface Configuration

**Usage Guide:**

The command per port configures the LLDP MED enable status. If LLDP MED is enabled, LLDP MED capability TLV and other selected MED TLV would be attached. The configuration could be shown by “show lldp med” command.

**Example:**

This example sets port gi1-4 to enable LLDP MED, port gi5-8 to disable LLDP MED.

```
Switch(config)# interface range gi1-4
Switch(config-if)# lldp med
Switch(config-if)# exit
Switch(config)# interface range gi5-8
Switch(config-if)# no lldp med
Switch(config-if)# exit
Switch(config)# show lldp interfaces gi1-8 med
Port | Capabilities | Network Policy | Location | Inventory | POE
----- + ----- + ----- + ----- + -----+ ----
gi1 | Yes | Yes | No | No | No
gi2 | Yes | Yes | No | No | No
```



```
gi3 | Yes | Yes | No | No | No
gi4 | Yes | Yes | No | No | No
gi5 | No | Yes | No | No | No
gi6 | No | Yes | No | No | No
gi7 | No | Yes | No | No | No
gi8 | No | Yes | No | No | No
```

## 4.13.12 lldp med tlv-select

### Command:

```
lldp med tlv-select MEDTLV [MEDTLV] [MEDTLV] [MEDTLV]

no lldp med tlv-select
```

### Parameter:

**MEDTLV** MED optional TLV. Available optional TLVs are : network-policy, location, poe-pse, inventory.

### Default:

lldp med tlv-select network-policy

### Mode:

Interface Configuration

### Usage Guide:

The command per port configures the LLDP MED TLV selection. “no lldp med tlv-select” command would remove all selected MED TLV over the dedicated ports. It should be noticed that even no MED TLV is selected, MED capability TLV would be attached if LLDP MED is enable. The configuration could be shown by “show lldp med” command.

### Example:

This example sets port gi1-2 to select LLDP MED network policy, location, POE-PSE, inventory TLVs, and it sets port gi3-4 to un-select all LLDP MED TLVs.

```
Switch(config)# interface range gi1-2
Switch(config-if)# lldp med tlv-select network-policy location poe-pse inventory
Switch(config-if)# exit
Switch(config)# interface range gi3-4
```

```
Switch(config-if-range)# no lldp med tlv-select
Switch(config-if-range)# exit
Switch(config)# show lldp interfaces gi1-4 med
Port | Capabilities | Network Policy | Location | Inventory | POE
-----+-----+-----+-----+-----+-----
gi1 | Yes | Yes | Yes | Yes | Yes
gi2 | Yes | Yes | Yes | Yes | Yes
gi3 | Yes | No | No | No | No
gi4 | Yes | No | No | No | No
```

### 4.13.13 lldp med fast-start-repeat-count

**Command:**

```
lldp med fast-start-repeat-count <1-10>
```

**Parameter:**

**<1-10>** LLDP PDU fast start TX repeat counts.

**Default:**

lldp med fast-start-repeat-count 3

**Mode:**

Global Configuration

**Usage Guide:**

The command globally configures the LLDP PDU fast start TX repeat count. When port links up, it will send LLDP PDU immediately to notify link partner. The number of LLDP PDU sends when it links up depends on fast-start-repeat-count configuration. The LLDP PDU fast-start transmits in interval of one second. The fast start behavior works no matter LLDP MED is enabled or not. The configuration could be shown by “show lldp med” command.

**Example:**

This example sets fast start repeat count to 10.

```
Switch(config)# lldp med fast-start-repeat-count 10
Switch(config)# show lldp med
Fast Start Repeat Count: 10
lldp med network-policy voice: auto
```

## 4.13.14 lldp med network-policy

### Command:

```
lldp med network-policy <1-32> app
(voice|voice-signaling|guest-voice|guest-voice-signaling|softphone-voice|
video-conferencing|streaming-video|video-signaling) vlan <1-4094> vlan-type
(tag|untag) priority <0-7> dscp <0-63>

no lldp med network-policy <1-32>
```

### Parameter:

|                                                                                                                                     |                                              |
|-------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|
| <b>&lt;1-32&gt;</b>                                                                                                                 | Specify the network policy index             |
| <b>(voice voice-signaling guest-voice guest-voice-signaling softphone-voice video-conferencing streaming-video video-signaling)</b> | Specify the network policy application type. |
| <b>&lt;1-4094&gt;</b>                                                                                                               | Specify the VLAN ID                          |
| <b>(tag untag)</b>                                                                                                                  | Specify the VLAN tag status                  |
| <b>&lt;0-7&gt;</b>                                                                                                                  | Specify the L2 priority                      |
| <b>&lt;0-63&gt;</b>                                                                                                                 | Specify the DSCP value                       |

### Mode:

Global Configuration

### Usage Guide:

The commands globally configures the LLDP MED network policy table. The “lldp med network-policy” command created a network policy entry that can be bind to ports. If LLDP MED network policy voice auto mode is enabled, “voice” type network policy can not be created since it is in auto mode. The “no lldp med network-policy” command clear the network policy entry of the specified index. A network policy can be cleared only when it is not bind to any port. The network policy table configuration could be shown by “show lldp med” command.

### Example:

This example create 2 network policies.

```
Switch(config)# aaa authentication login test1 tacacs+ radius local
Switch(config)# lldp med network-policy 1 app voice-signaling vlan 2 vlan-type tag
```

```

priority 3 dscp 4
Switch(config)# lldp med network-policy 32 app video-conferencing vlan 5 vlan-type
tag priority 1 dscp 63
Switch(config)# show lldp med
Fast Start Repeat Count: 10
lldp med network-policy voice: auto
Network policy 1

Application type: Voice Signaling
VLAN ID: 2 tagged
Layer 2 priority: 3
DSCP: 4
Network policy 32

Application type: Conferencing
VLAN ID: 5 tagged
Layer 2 priority: 1
DSCP: 63

```

## 4.13.15 lldp med network-policy add | remove

**Command:**

```
lldp med network-policy (add|remove) <1-32>
```

**Parameter:**

|                     |                                                 |
|---------------------|-------------------------------------------------|
| <b>(add remove)</b> | Add or remove network policy binding for ports. |
| <b>&lt;1-32&gt;</b> | Specify the network policy index                |

**Mode:**

Interface Configuration

**Usage Guide:**

The command per port configures the network policy binding for port interface. The binded network policy of one port should be with different types. If network policy TLV is selected over a port, the binded network policies would be attached in LLDP MED PDU. The configuration of network policy binding could be shown by “show lldp med” command.

**Example:**

This example binds network policy for interface gi1 and gi2.

```

Switch(config)# show lldp med
Fast Start Repeat Count: 10
lldp med network-policy voice: auto
Network policy 1

Application type: Voice Signaling
VLAN ID: 2 tagged
Layer 2 priority: 3
DSCP: 4
Network policy 32

Application type: Conferencing
VLAN ID: 5 tagged
Layer 2 priority: 1
DSCP: 63
Switch(config)# interface range gi1,2
Switch(config-if-range)# lldp med network-policy add 1,32
Switch(config)# show lldp interfaces gi1,2 med
Port | Capabilities | Network Policy | Location | Inventory | POE
-----+-----+-----+-----+-----+-----
gi1 | Yes | Yes | Yes | Yes | Yes
gi2 | Yes | Yes | Yes | Yes | Yes
Port ID: gi1
Network policies: 1, 32
Port ID: gi2
Network policies: 1, 32

```

## 4.13.16 lldp med network-policy auto

**Command:**

```

lldp med network-policy auto

no lldp med network-policy auto

```

**Mode:**

Global Configuration

**Usage Guide:**

The command globally configures the network policy voice auto mode enable status. In voice auto mode, if network-policy TLV is selected, a voice type network policy would be attached to PDU that contents comes from voice VLAN configuration. This works for voice VLAN module to exchange voice VLAN information with link partner. If voice auto mode is enabled, user can not manually create an voice type network policy; if an voice type network policy is created, the voice auto mode can not be enabled. The configuration of network policy auto mode could be shown by “show lldp med” command.

**Example:**

This example sets network policy auto mode to enable and then disable.

```
Switch(config)# lldp med network-policy auto
Switch(config)# show lldp med
Fast Start Repeat Count: 10
lldp med network-policy voice: auto
Switch(config)# no lldp med network-policy auto
Switch(config)# show lldp med
Fast Start Repeat Count: 10
lldp med network-policy voice: manual
```

## 4.13.17 lldp med location

**Command:**

```
lldp med location (coordination|civic-address|ecs-elin) ADDR
no lldp med location (coordination|civic-address|ecs-elin)
```

**Parameter:**

- (coordination|civic-address|ecs-elin)** Location type to be configured. “ecs-elin” is abbreviation of emergency call service – emergency location identifier number
- ADDR** Specify the location data. Input format is hexadecimal values without colon (for example: 1234AB). For coordination location type, the length of ADDR is 16 bytes. For civic-address, the length is 6 to 160 bytes. For ecs-elin, the length is 10 to 25 bytes.

**Mode:**

Interface Configuration

**Usage Guide:**

The command per port configures the LLDP MED location data. The “no lldp med location” command clear the location data. The “coordinate”, “civic-address”, “ecs-elin” locations are independent, so at most three location TLVs could be sent if their data are not empty. The configuration of location could be shown by “show lldp interface PORT med” command.

**Example:**

This example sets location data for interface gi1.

```
Switch(config)# aaa authentication login test1 tacacs+ radius local
Switch(config)# interface gi1
Switch(config-if)# lldp med location coordinate
112233445566778899AABBCCDDEEFF00
Switch(config-if)# lldp med location civic-address 112233445566
Switch(config-if)# lldp med location ecs-elin 112233445566778899AA
Switch(config)# show lldp interfaces gi1 med
Port | Capabilities | Network Policy | Location | Inventory | POE
----- + ----- + ----- + ----- + -----+ ----
gi1 | Yes | Yes | Yes | Yes | Yes
Port ID: gi1
Network policies: 1, 32
Location:
Coordinates: 112233445566778899AABBCCDDEEFF00
Civic-address: 112233445566
Ecs-elin: 112233445566778899AA
```

## 4.13.18 show lldp

**Command:**

```
show lldp

show lldp interface IF_NMLPORTS
```

**Parameter:**

**IF\_NMLPORTS** Specify the ports to display information

**Mode:**

- Global Configuration
- Privileged Configuraiton

**Usage Guide:**

The “show lldp” and “show lldp interface” command displays LLDP global information including LLDP enable status, LLDP PDU TX interval, hold time multiplier, re-initial delay, TX delay, and LLDP packet handling when LLDP is disabled. The per port information displayed includes port LLDP RX/TX enable status, selected TLV to TX and IP address. The abbreviations in optional TLVs are: port description (PD), system name (SN), system description (SD), and system capability (SC).

**Example:**

This example displays lldp information of port gi1 and gi2

```
Switch# show lldp interfaces gi1,gi2
State: Disabled
Timer: 30 Seconds
Hold multiplier: 4
Reinit delay: 2 Seconds
Tx delay: 2 Seconds
LLDP packet handling: Flooding
Port | State | Optional TLVs | Address
-----+-----+-----+-----
gi1 | RX,TX | PD, SN, SD, SC | 192.168.1.254
gi1 | RX,TX | | 192.168.1.254
Port ID: gi1
802.3 optional TLVs: 802.3-mac-phy, 802.3-lag, 802.3-max-frame-size, management-addr
802.1 optional TLVs
PVID: Enabled
Port ID: gi2
802.3 optional TLVs:
802.1 optional TLVs
PVID: Enabled
```

## 4.13.19 show lldp local-device

**Command:**



```
show lldp local-device
```

```
show lldp interfaces IF_NMLPORTS local-device
```

**Parameter:**

**IF\_NMLPORTS** Specify the ports to display information

**Mode:**

Privileged Configuration

Global Configuration

**Usage Guide:**

The commands show the local configuration of LLDP PDU. By the commands, a user can view the contents of LLDP/LLDP-MED TLVs that would be attached in LLDP PDU.

**Example:**

This example displays the local device information.

```
Switch(config)# show lldp local-device
LLDP Local Device Information:
Chassis Type : Mac Address
Chassis ID : 00:12:12:12:12:12
System Name : Switch
System Description :
System Capabilities Support : Bridge
System Capabilities Enable : Bridge
Management Address : 192.168.1.254(IPv4)
Switch(config)# show lldp interfaces gi1 local-device
Device ID: 00:12:12:12:12:12
Port ID: gi1
System Name: Switch
Capabilities: Bridge
System description:
Port description:
Management address: 192.168.1.254
Time To Live: 120
802.3 MAC/PHY Configur/Status
Auto-negotiation support: Supported
Auto-negotiation status: Enabled
Auto-negotiation Advertised Capabilities: 10BASE-T half duplex, 10BASE-T full duplex,
```

100BASE-TX half duplex, 100BASE-TX full duplex  
Operational MAU type: Other or unknown  
802.3 Link Aggregation  
Aggregation capability: Capable of being aggregated  
Aggregation status: Not currently in aggregation  
Aggregation port ID: 0  
802.3 Maximum Frame Size: 1522  
802.1 PVID: 1  
LLDP-MED capabilities: Capabilities, Network Policy, Location, Extended PSE, Inventory  
LLDP-MED Device type: Network Connectivity  
LLDP-MED Network policy  
Application type: Voice Signaling  
Flags: Unknown Policy  
VLAN ID: 2  
Layer 2 priority: 3  
DSCP: 4  
LLDP-MED Network policy  
Application type: Conferencing  
Flags: Unknown Policy  
VLAN ID: 5  
Layer 2 priority: 1  
DSCP: 63  
Hardware revision: 1123  
Firmware revision: 2.5.0-beta.32801  
Software revision: 2.5.0-beta.32801  
Serial number: abc  
Manufacturer Name:  
Model name: Switch  
Asset ID:  
LLDP-MED Location  
Coordinates: 11:22:33:44:55:66:77:88:99:AA:BB:CC:DD:EE:FF:00  
Civic-address: 11:22:33:44:55:66  
Ecs-elin: 11:22:33:44:55:66:77:88:99:AA

## 4.13.20 show lldp neighbor

### Command:

```
show lldp neighbor
```

```
show lldp interfaces IF_NMLPORTS neighbor
```

### Parameter:

**IF\_NMLPORTS** Specify the ports to display information

### Mode:

Global Configuration

Privileged Configuration

### Usage Guide:

When LLDP PDU is received on LLDP RX enable ports, system would store the PDU information in database until time to live of the PDU counts down to zero. The commands display the received neighbor LLDP PDU information.

### Example:

This example displays the neighbor information.

```
Switch(config)# show lldp neighbor
Port | Device ID | Port ID | SysName | Capabilities | TTL
---- + -+----- + -+----- + -+----- + -+----- + ----
gi3 | 00:12:12:12:12:12 | gi1 | Switch | Bridge | 111
gi11 | TREEBASE | 00:1A:4D:26:EB:E8 | TREEBASE | Station Only | 33
Switch(config)# show lldp interfaces gi3 neighbor
Device ID: 00:12:12:12:12:12
Port ID: gi1
System Name: Switch
Capabilities: Bridge
System description:
Port description:
Management address: 192.168.1.254
Time To Live: 98
802.3 MAC/PHY Configur/Status
Auto-negotiation support: Supported
Auto-negotiation status: Enabled
Auto-negotiation Advertised Capabilities: 10BASE-T half duplex, 10BASE-T full duplex,
```

100BASE-TX half duplex, 100BASE-TX full duplex  
Operational MAU type: 100BASE-TX full duplex mode  
802.3 Link Aggregation  
Aggregation capability: Capable of being aggregated  
Aggregation status: Not currently in aggregation  
Aggregation port ID: 0  
802.3 Maximum Frame Size: 1522  
802.1 PVID: 1  
LLDP-MED capabilities: Capabilities, Network Policy, Location, Extended PSE, Inventory  
LLDP-MED Device type: Network Connectivity  
LLDP-MED Network policy  
Application type: Voice Signaling  
Flags: Unknown Policy  
VLAN ID: 2  
Layer 2 priority: 3  
DSCP: 4  
LLDP-MED Network policy  
Application type: Conferencing  
Flags: Unknown Policy  
VLAN ID: 5  
Layer 2 priority: 1  
DSCP: 63  
LLDP-MED Power over Ethernet  
Device Type: Power Sourcing Entity  
Power Source: Primary Power Source  
Power priority: Low  
Power value: 13.0 Watts  
Hardware revision: 1123  
Firmware revision: 2.5.0-beta.32801  
Software revision: 2.5.0-beta.32801  
Serial number: abc  
Manufacturer Name:  
Model name: Switch  
Asset ID:  
LLDP-MED Location  
Coordinates: 11:22:33:44:55:66:77:88:99:AA:BB:CC:DD:EE:FF:00  
Civic-address: 11:22:33:44:55:66  
Ecs-elin: 11:22:33:44:55:66:77:88:99:AA

## 4.13.21 show lldp med

### Command:

```
show lldp med
```

```
show lldp interfaces IF_NMLPORTS med
```

### Parameter:

**IF\_NMLPORTS** Specify the ports to display information

### Mode:

Global Configuration

Privileged Configuration

### Usage Guide:

The commands display the LLDP MED configuration information.

### Example:

This example display the LLDP MED information.

```
Switch(config)# show lldp med
```

```
Fast Start Repeat Count: 10
```

```
lldp med network-policy voice: manual
```

```
Network policy 1
```

```

```

```
Application type: Voice Signaling
```

```
VLAN ID: 2 tagged
```

```
Layer 2 priority: 3
```

```
DSCP: 4
```

```
Network policy 32
```

```

```

```
Application type: Conferencing
```

```
VLAN ID: 5 tagged
```

```
Layer 2 priority: 1
```

```
DSCP: 63
```

```
Port | Capabilities | Network Policy | Location | Inventory | POE
```

```
-----+-----+-----+-----+-----+-----
```

```
gi1 | Yes | Yes | Yes | Yes | Yes
```

```
gi2 | Yes | Yes | Yes | Yes | Yes
```

```
gi3 | Yes | No | No | No | No
gi4 | Yes | No | No | No | No
gi5 | No | Yes | No | No | No
gi6 | No | Yes | No | No | No
gi7 | No | Yes | No | No | No
gi8 | No | Yes | No | No | No
gi9 | Yes | Yes | No | No | No
gi10 | Yes | Yes | No | No | No
gi11 | Yes | Yes | No | No | No
gi12 | Yes | Yes | No | No | No
gi13 | Yes | Yes | No | No | No
gi14 | Yes | Yes | No | No | No
gi15 | Yes | Yes | No | No | No
gi16 | Yes | Yes | No | No | No
gi17 | Yes | Yes | No | No | No
gi18 | Yes | Yes | No | No | No
gi19 | Yes | Yes | No | No | No
gi20 | Yes | Yes | No | No | No
gi21 | Yes | Yes | No | No | No
gi22 | Yes | Yes | No | No | No
gi23 | Yes | Yes | No | No | No
gi24 | Yes | Yes | No | No | No
gi25 | Yes | Yes | No | No | No
gi26 | Yes | Yes | No | No | No
gi27 | Yes | Yes | No | No | No
gi28 | Yes | Yes | No | No | No

Switch(config)# show lldp interfaces gi1 med

Port | Capabilities | Network Policy | Location | Inventory | POE
----- + ----- + ----- + ----- + -----+ -----
gi1 | Yes | Yes | Yes | Yes | Yes

Port ID: gi1
Network policies: 1, 32
Location:
Coordinates: 112233445566778899AABBCCDDEEFF00
Civic-address: 112233445566
Ecs-elin: 112233445566778899AA

Switch(config)#
```

## 4.13.22 show lldp statistics

### Command:

```
show lldp statistics
```

```
show lldp interfaces IF_NMLPORTS statistics
```

### Parameter:

**IF\_NMLPORTS** Specify the ports to display information

### Mode:

Global Configuration

Privileged Configuration

### Usage Guide:

The commands display the LLDP RX/TX statistics.

### Example:

This example display the LLDP statistics.

```
Switch(config)# show lldp statistics
LLDP Global Statistics:
Insertions : 3
Deletions : 0
Drops : 0
Age Outs : 1
| TX Frames | RX Frames | RX TLVs | RX Ageouts
Port | Total | Total | Discarded | Errors | Discarded | Unrecognized | Total
-----+-----+-----+-----+-----+-----+-----+-----
gi1 | 50 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi3 | 0 | 50 | 0 | 0 | 0 | 0 | 0 | 1
gi4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi6 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi7 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi8 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi9 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi10 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0
```

```

gi11 | 3377 | 10129 | 0 | 0 | 0 | 0 | 0 | 0
gi12 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi13 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi14 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi16 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi17 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi18 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi19 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi20 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi21 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi22 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi23 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi24 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi25 | 3377 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi26 | 3377 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi27 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0
gi28 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0

Switch(config)# show lldp interfaces gi1 statistics

LLDP Port Statistics:
| TX Frames | RX Frames | RX TLVs | RX Ageouts
Port | Total | Total | Discarded | Errors | Discarded | Unrecognized | Total
-----+-----+-----+-----+-----+-----+-----+-----
gi1 | 51 | 0 | 0 | 0 | 0 | 0 | 0 | 0

```

### 4.13.23 show lldp tlv-overloading

Command:

```
show lldp interfaces IF_NMLPORTS tlvs-overloading
```

Parameter:

**IF\_NMLPORTS** Specify the ports to display information

Mode:

Global Configuration



Privileged Configuration

**Usage Guide:**

The LLDP PDU is composed by TLVs and selected number TLVs may compose a large PDU that the system can not handle. The maximum PDU length is to take the smaller number of jumbo frame size minus 30 bytes (30 bytes kept for header) or 1488 bytes. The commands display the length of LLDP TLVs and if the TLVs overload the PDU length. The TLVs with status marked "overload" would not be transmitted.

**Example:**

This example display the LLDP TLVs overloading status of port gi1.

```
Switch(config)# show lldp interfaces gi1 tlvs-overloading
gi1:
TLVs Group | Bytes | Status
-----+-----+-----
Mandatory | 21 | Transmitted
LLDP-MED Capabilities | 9 | Transmitted
LLDP-MED Location | 53 | Transmitted
LLDP-MED Network Policies | 20 | Transmitted
LLDP-MED POE | 9 | Transmitted
802.3 | 30 | Transmitted
Optional | 38 | Transmitted
LLDP-MED Inventory | 97 | Transmitted
802.1 | 8 | Transmitted
Total: 285 bytes
Left: 1203 bytes
```

## 4.14 Logging

### 4.14.1 logging

**Command:**

```
logging
no logging
```

**Mode:**

Global Configuration

**Usage Guide:**

Enable/Disable the logging service.

**logging**

Enable the logging service. It is the global option of logging service. The status of the logging service is available from the command "show logging".

**no logging**

Disable the logging service. When the logging service is disabled, all messages will stop logging to the system.

**show logging**

Display the global logging status. It will show the logging configuration of the system, including the global logging status, and the lists of logging services.

**Example:**

```
Switch(config)# show logging
Switch(config)# no logging
Switch(config)# show logging
Logging service is disabled
TARGET | STATUS | Server (PORT) | FACILITY | LOG LEVEL
-----+-----+-----+-----+-----
buffered | enabled | | | emerg, alert, crit, error, warning, notice, info
Switch(config)# logging
Switch(config)# show logging
Logging service is enabled
TARGET | STATUS | Server (PORT) | FACILITY | LOG LEVEL
```

```
-----+-----+-----+-----+-----
buffered | enabled | | | emerg, alert, crit, error, warning, notice, info
```

## 4.14.2 logging flash | buffered

**Command:**

```
logging (flash|buffered) [severity <0-7>]

no logging (flash|buffered)
```

**Parameter:**

- flash**                      Specify logging to flash.
- buffer**                     Specify logging to RAM.
- severity**                   Specify the minimum severity mask of logging message.

**Default:**

Severity = 6 (emerg, alert, crit, error, warning, notice, info)

**Mode:**

Global Configuration

**Usage Guide:**

Enable/Disable the local capability to log message to RAM/flash with the minimum severity. The minimum severity value is "6", including messages of severity emergency, alert, critical, error, warning, notice, and info.

**logging flash**

Enable the capability to log message to flash, and the default minimum severity is 6. When the service is enables, messages will start to be logged to the flash. All logging messages will be saved when the system shutdown. Only when the local logging capability of flash is enabled, the status of logging flash service will be shown by the command "show logging".

**logging buffered**

Enable the capability to log message to RAM, and the default minimum severity is 6. When the service is enabled, the messages will start to be logged to RAM. All logging message will be lost when the system shutdown.

**no logging flash**

Disable the capability to log message to flash. Once the logging capability of flash is disabled, the status of logging flash service will be removed from the service list shown by the command "show logging".

**no logging buffered**

Disable the capability to log message to RAM.

**show logging**

Display the logging status. It will show the logging configuration of the system, including the global logging status, and the lists of logging services. When the local logging capability is enabled, the status of the local logging (flash or buffered) will be shown by the command “show logging”; Otherwise, the logging entry will be removed from the service list.

**Example:**

```
Switch(config)# show logging
Logging service is enabled
TARGET | STATUS | Server (PORT) | FACILITY | LOG LEVEL
-----+-----+-----+-----+-----
buffered | enabled | | |emerg, alert, crit, error, warning, notice, info
Switch(config)# no logging buffer
Switch(config)# show logging
Logging service is enabled
TARGET | STATUS | Server (PORT) | FACILITY | LOG LEVEL
-----+-----+-----+-----+-----
Switch(config)# logging buffered
Switch(config)# logging flash severity 5
Switch(config)# show logging
Logging service is enabled
TARGET | STATUS | Server (PORT) | FACILITY | LOG LEVEL
-----+-----+-----+-----+-----
buffered | enabled | | |emerg, alert, crit, error, warning, notice, info
flash | enabled | | |emerg, alert, crit, error, warning, notice
```

### 4.14.3 logging host

**Command:**

```
logging host <ip-addr> [port <0-65535>] [severity <0-7>] [facility
(local0|local1|local2|local3|local4|local5|local6|local7)]
```

**no logging <ip-addr>**

**Parameter:**

|                 |                                                       |
|-----------------|-------------------------------------------------------|
| <b>ip-addr</b>  | Specify the IP address of remote logging server.      |
| <b>port</b>     | Specify the port number of remote logging server.     |
| <b>severity</b> | Specify the minimum severity mask of logging message. |
| <b>facility</b> | Specify the facility of logging messages.             |

**Default:**

Port = 514,  
 Severity = 6 (emerg, alert, crit, error, warning, notice, info)  
 Facility = Local7

**Mode:**

Global Configuration

**Usage Guide:**

Enable/Disable the capability to log message to the remote syslog server.

**logging host 192.168.1.100**

Enable the capability to log messages to the remote server. The default values of the parameter port is "514", severity is "6" (emerg, alert, crit, error, warning, notice, info), and the facility is "local7". All logging message will be sent to the remote server. Only when the remote logging capability is enabled, the status of remote logging service will be shown by the command "show logging". When an existed entry is set twice, the old setting will be replaced and modified with the new one.

**no logging host 192.168.1.100**

Disable the capability to log messages to the remote server. When the remote logging service is disabled, the log will not be sent to the remote syslog server, and the status of remote logging entry will be removed from service list shown by the command "show command".

**show logging**

Display the logging status. It will show the logging configuration of the system, including the global logging status, and the lists of logging services. When the remote logging capability is enabled, the status of remote logging will be shown by the command "show logging"; Otherwise, the remote logging entry will be removed from the service list.

**Example:**

```
Switch(config)# logging host 192.168.1.100
Switch(config)# logging host 192.168.1.100 port 2048 severity 3 facility local1
```

```
Switch(config)# show logging
Logging service is enabled
TARGET | STATUS | Server (PORT) | FACILITY | LOG LEVEL
-----+-----+-----+-----+-----
buffered | enabled | | |emerg, alert, crit, error, warning, notice, info
flash | enabled | | |emerg, alert, crit, error, warning, notice
host | enabled | 192.168.1.100(2048)| local1 |emerg, alert, crit, error
Switch(config)# no logging host 192.168.1.100
Switch(config)# show logging
Logging service is enabled
TARGET | STATUS | Server (PORT) | FACILITY | LOG LEVEL
-----+-----+-----+-----+-----
buffered | enabled | | |emerg, alert, crit, error, warning, notice, info
flash | enabled | | |emerg, alert, crit, error, warning, notice
```

## 4.14.4 show logging

**Command:**

```
show logging
```

**Mode:**

- Global Configuration
- Privileged Configuration

**Usage Guide:**

**show logging**

Show the logging configuration. The information includes the global logging service status, and the list of logging service.

Status of global logging service can be determined by the command “logging/no logging”. The list of logging service shows all the active logging service.

**Example:**

```
Switch(config)# show logging
Logging service is enabled
TARGET | STATUS | Server (PORT) | FACILITY | LOG LEVEL
-----+-----+-----+-----+-----
```

buffered | enabled | | | emerg, alert, crit, error, warning, notice, info

## 4.14.5 show logging flash | buffered

**Command:**

**show logging (flash|buffered)**

**Parameter:**

- flash** Specify showing the messages logged to flash.
- buffered** Specify showing the messages logged to RAM.

**Mode:**

- Global Configuration
- Privileged Configuration

**Usage Guide:**

Show the messages logged to flash/RAM.

**show logging flash**

Show the messages logged to the flash. When the capability of the service is enabled, it will show all message logged to the flash. All messages will be logged in inverse chronological order.

**show logging buffered**

Show the messages logged to the RAM. When the capability of the service is enabled, it will show all message logged to the RAM. Logs will be lost after system shutdown. All messages will be logged in inverse chronological order.

**Example:**

```
Switch(config)# show logging buffered
Log messages in buffered
NO.| Timestamp | Category | Severity | Message
-----+-----+-----+-----+-----
1| Jan 01 08:00:57| STP| info| Port 1 STP port state is set to Forwarding
2| Jan 01 08:00:42| STP| info| Port 1 STP port state is set to Learning
3| Jan 01 08:00:30| AAA| info| User " enter privileged mode from console with level '15'
success
```

```
4| Jan 01 08:00:28| AAA| info| User " is authorized with privilege level 1
5| Jan 01 08:00:28| AAA| info| User " login from console success
6| Jan 01 08:00:24| System| info| Sysinfo variable 'resetdefault' is set to value '0'
7| Jan 01 08:00:23| System| notice| System Startup!
```

## 4.14.6 clear logging flash | buffered

### Command:

```
clear logging (flash|buffered)
```

### Parameter:

**flash** Specify showing the messages logged to flash.  
**buffered** Specify showing the messages logged to RAM.

### Mode:

Global Configuration  
Privileged Configuration

### Usage Guide:

Clear the message logged to flash/RAM.

#### clear logging flash

Clear the messages logged to flash.

#### clear logging buffered

Clear the messages logged to RAM.

### Example:

```
Switch# show logging buffered
Log messages in buffered
NO.| Timestamp | Category | Severity | Message
-----+-----+-----+-----+-----
1| Jan 01 08:00:57| STP| info| Port 1 STP port state is set to Forwarding
2| Jan 01 08:00:42| STP| info| Port 1 STP port state is set to Learning
3| Jan 01 08:00:30| AAA| info| User " enter privileged mode from console with level '15'
success
```



```
4| Jan 01 08:00:28| AAA| info| User " " is authorized with privilege level 1
5| Jan 01 08:00:28| AAA| info| User " " login from console success
6| Jan 01 08:00:24| System| info| Sysinfo variable 'resetdefault' is set to value '0'
7| Jan 01 08:00:23| System| notice| System Startup!
```

```
Switch# clear logging buffered
```

```
Switch# show logging buffered
```

```
Log messages in buffered
```

```
NO.| Timestamp | Category | Severity | Message
```

```
-----+-----+-----+-----
```

## 4.15 MAC Address Table

### 4.15.1 clear mac address-table

**Command:**

```
clear mac address-table dynamic [interfaces IF_PORTS] [vlan <1-4094>]
```

**Parameter:**

**IF\_PORTS** Delete all dynamic addresses on the specified interface.  
**<1-4094>** Delete all dynamic addresses on the specified VLAN

**Mode:**

Privileged Configuration

**Usage Guide:**

Use the **clear mac address-table Privileged EXEC** command to delete dynamic mac entry on specified interface or VLAN or all dynamic mac entry in mac address table

You can verify your setting by entering the **show mac address-table dynamic Privileged EXEC** command

**Example:**

This example shows how to delete dynamic MAC address entries on gi1

```
Switch# show mac address-table dynamic
VID | MAC Address | Type | Ports
-----+-----+-----+-----
1 | 00:30:4F:00:00:12 | Dynamic | gi11
1 | 00:30:4F:3B:1E:E6 | Dynamic | gi1
Total number of entries: 2
Switch(config)# clear mac address-table dynamic interfaces gi1
Switch# show mac address-table dynamic
VID | MAC Address | Type | Ports
-----+-----+-----+-----
1 | 00:30:4F:00:00:12 | Dynamic | gi11
Total number of entries: 1
```

### 4.15.2 mac address-table aging-time

**Command:**

```
mac address-table aging-time <10-630>
```

**Parameter:**

**<10-630>** Specify aging time value of second.

**Default:**

In default aging out time is 300s.

**Mode:**

Global Configuration

**Usage Guide:**

Use the mac address-table aging-time Global configuration command to set the aging time of the address table

You can verify your setting by entering the **show mac address-table aging-time Privileged EXEC** command

**Example:**

The following example show how to configure dynamic mac entry aging out time

```
Switch(config)# mac address-table aging-time 100
Switch# show mac address-table aging-time
Mac Address Table aging time: 100 sec
```

## 4.15.3 mac address-table static

**Command:**

```
mac address-table static A:B:C:D:E:F vlan <1-4094> interfaces IF_PORTS

no mac address-table static A:B:C:D:E:F vlan <1-4094>
```

**Parameter:**

**A:B:C:D:E:F** Destination MAC address (unicast or multicast) to add to the address table. Packets with this destination address received in the specified VLAN are forwarded to the specified interface.

**<1-4094>** Specify the VLAN for which the packet with the specified MAC address is received.

**IF\_PORTS** Interface to which the received packet is forwarded. Valid interfaces include physical ports and port channels.

**Mode:**

Global Configuration

**Usage Guide:**

Use the **mac address-table static** global configuration command to add static addresses to the MAC address table.

Use the **no** form of this command to remove static entries from the table.

You can verify your setting by entering the **show mac address-table static** Privileged EXEC command

**Example:**

This example shows how to add static addresses to the MAC address table.

```
Switch(config)# mac address-table static 0:1:2:3:4:5 vlan 1 interfaces gi5
Switch(config)# mac address-table static 1:6:7:9:a:b vlan 100 interfaces gi1,gi5,gi10
Switch# show mac address-table static
VID | MAC Address | Type | Ports -----+-----+-----
-----+----- 1 | 00:30:4F:03:04:05 | Static | gi5
100 | 00:30:4F:09:0A:0B | Static | gi1,gi5,gi10
Total number of entries: 2
```

## 4.15.4 mac address-table static drop

**Command:**

```
mac address-table static A:B:C:D:E:F vlan <1-4094> drop
```

**Parameter:**

**A:B:C:D:E:F** Unicast source or destination MAC address. Packets with this MAC address are dropped.

**<1-4094>** Specify the VLAN for which the packet with the specified MAC address is received.

**Default:**

Unicast MAC address filtering is disabled. The switch does not drop traffic for specific source or destination MAC addresses.

**Mode:**

Global Configuration

**Usage Guide:**

Use the **mac address-table static drop** global configuration command to enable unicast MAC address filtering and to configure the switch to drop traffic with a specific source or destination MAC address.

Use the **no** form of this command to return to the default setting.

You can verify your setting by entering the **show mac address-table static** Privileged EXEC command

**Example:**

This example shows how to add filter mac addresses to the MAC address table.

```
Switch(config)# mac address-table static a:b:c:d:e:f vlan 20 drop
Switch# show mac address-table
VID | MAC Address | Type | Ports -----+-----+-----
-----+----- 1 | 00:30:4F:03:04:05 | Static | gi5
100 | 00:30:4F:09:0A:0B | Static | gi1,gi5,gi10 20 | 00:30:4F:0D:0E:0F | Filtering | All
Total number of entries: 3
```

## 4.15.5 show mac address-table

**Command:**

```
show mac address-table [(static|dynamic)] [interfaces IF_PORTS] [vlan <1-4094>]

show mac address-table A:B:C:D:E:F [vlan <1-4094>]
```

**Parameter:**

- static** Add/Edit login authentication list
- dynamic** Displays only static MAC address table entries.
- IF\_PORTS** Displays entries for a specific interface ID. The interface ID can be one of the following types: Ethernet port or port-channel.
- <1-4094>** Displays entries for a specific VLAN.
- A:B:C:D:E:F** Displays entries for a specific MAC address.

**Mode:**

Privileged EXEC

**Usage Guide:**

Use the show mac address-table command in EXEC mode to view entries in the MAC address table.

**Example:**

This example shows all MAC address entries in mac address table.

```
Switch# show mac address-table
VID | MAC Address | Type | Ports
```

```

-----+-----+-----+-----
1 | DE:AD:BE:EF:01:02 | Management | CPU 1 | 00:00:E3:00:00:12 | Dynamic | gi11
1 | 00:01:02:03:04:05 | Static | gi5
1 | 00:14:78:3B:1E:E6 | Dynamic | gi1
100 | 01:06:07:09:0A:0B | Static | gi1,gi5,gi10 20 | 0A:0B:0C:0D:0E:0F | Static | All
Total number of entries: 6

The following example displays address table entries containing the specified MAC
address.

Switch# show mac address-table 0:1:2:3:4:5

VID | MAC Address | Type | Ports
-----+-----+-----+-----
1 | 00:01:02:03:04:05 | Static | gi5

Total number of entries: 1

```

## 4.15.6 show mac address-table counters

Command:

```
show mac address-table counters
```

Mode:

Privileged EXEC

Usage Guide:

Use the **show mac address-table counters** command in EXEC mode to display the number of addresses present in mac address-table

Example:

This example shows how to display total mac entry counters

```
Switch# show mac address-table counters

Total number of entries: 5
```

## 4.15.7 show mac address-table aging-time

Command:

```
show mac address-table aging-time
```

**Mode:**

Privileged EXEC

**Usage Guide:**

Use the **show mac address-table aging-time** command in EXEC mode to display the aging time for dynamic mac entries.

**Example:**

This example shows how to display aging time of dynamic mac address entry

```
Switch# show mac address-table aging-time
Mac Address Table aging time: 300 sec
```

## 4.16 Mirror

### 4.16.1 mirror session

**Command:**

```
mirror session <1-4> source interfaces IF_PORTS (both | rx | tx)

no mirror session <1-4> source interfaces IF_PORTS (both|rx|tx)

mirror session <1-4> source vlan <1-4094>

no mirror session <1-4> source vlan

mirror session <1-4> destination interface IF_NMLPORT [allow-ingress]

no mirror session <1-4> destination interface IF_NMLPORT

no mirror session (<1-4> | all)
```

**Parameter:**

|                    |                                                                                          |
|--------------------|------------------------------------------------------------------------------------------|
| <b>&lt;1-4&gt;</b> | Specify the mirror session to configure                                                  |
| <b>IF_PORTS</b>    | Specify the source interface, Valid interfaces include physical ports and port channels. |
| <b>both,rx,tx</b>  | Specify the traffic direction to mirror.                                                 |

|                       |                                                                     |
|-----------------------|---------------------------------------------------------------------|
| <b>&lt;1-4094&gt;</b> | Specify the mirrored VLAN ID                                        |
| <b>IF_NMLPORT</b>     | Specify the SPAN destination. A destination must be a physical port |
| <b>allow-ingress</b>  | Enable ingress traffic forwarding.                                  |

**Mode:**

Global Configuration

**Usage Guide:**

Use the **monitor session** global configuration command to start a new Switched Port Analyzer (SPAN) source or destination session

Use the **no** form of this command to remove the SPAN session or to remove source or destination interfaces or filters from the SPAN session

You can verify your setting by entering the **show mirror** Privileged EXEC command

**Example:**

This example shows how to create a local SPAN session 1 to monitor both sent and received traffic on source port gi1.

```
Switch(config)# mirror session 1 source interface gi2-5 both
Switch(config)# mirror session 1 destination interface gi1
Switch(config)# show mirror session 1
Session 1 Configuration
Source RX Port : gi2-5
Source TX Port : gi2-5
Destination port : gi1
Ingress State: disabled
Switch(config)# mirror session 2 source vlan 100
Switch(config)# mirror session 2 destination interface gi1 allow-ingress
Switch(config)# show mirror session 2
Session 2 Configuration
Mirrored VLAN: 100
Destination port : gi1
Ingress State: enable
```

## 4.16.2 show mirror

**Command:**



```
show mirror [session <1-4>]
```

**Parameter:**

<1-4> Specify the mirror session to display

**Mode:**

Privileged EXEC

**Usage Guide:**

Use the **show mirror** command in EXEC mode to display mirror session configuration

**Example:**

This example shows how to display mirror session configuration

```
Switch(config)# show mirror
Session 1 Configuration
Source RX Port : gi2-5
Source TX Port : gi2-5
Destination port : gi1
Ingress State: disabled
Session 2 Configuration
Mirrored source : Not Config
Destination port : Not Config
Session 3 Configuration
Mirrored source : Not Config
Destination port : Not Config
Session 4 Configuration
Mirrored source : Not Config
Destination port : Not Config
```

## 4.17 MLD Snooping

### 4.17.1 ipv6 mld snooping

#### Command:

```

ipv6 mld snooping

no ipv6 mld snooping

show ipv6 mld snooping

```

#### Default:

Disabled

#### Mode:

Global Configuration

#### Usage Guide:

'**no ipv6 mld snooping**' will clear all ipv6 mld snooping dynamic group and dynamic router port, and make the static ipv6 mld group invalid. Then do not learning the dynamic group and router port by mld message.

The configure can use '**show ipv6 mld snooping**'

#### Example:

This example shows how to specify that set ipv6 mld snooping test.

```

Switch(config)# ipv6 mld snooping
Switch# show ipv6 mld snooping
MLD Snooping Status

Snooping : Enabled
Report Suppression : Enabled
Operation Version : v1
Forward Method : mac
Unknown Multicast Action : Flood
Switch(config)# no ipv6 mld snooping
Switch# show ipv6 mld snooping
MLD Snooping Status

Snooping : Disabled
Report Suppression : Enabled

```

```

Operation Version : v1
Forward Method : mac
Unknown Multicast Action : Flood

```

## 4.17.2 ipv6 mld snooping report-suppression

### Command:

```

ipv6 mld snooping report-suppression

no ipv6 mld snooping report-suppression

```

### Default:

Enabled

### Mode:

Global Configuration

### Usage Guide:

'**no ipv6 mld snooping report-suppression**' will disable mld v1 report suppression function. So when receive report will forward to the vlan router ports. The configure can use '**show ipv6 mld snooping**'.

### Example:

This example shows how to specify that disable ipv6 mld snooping report-suppression test.

```

Switch(config)# no ipv6 mld snooping report-suppression
Switch# show ipv6 mld snooping
MLD Snooping Status

Snooping : Enabled
Report Suppression : Disabled
Operation Version : v1
Forward Method : mac
Unknown Multicast Action : Flood

```

## 4.17.3 ipv6 mld snooping version

**Command:**

```
ipv6 mld snooping version (1|2)
```

**Parameter:**

(1|2)                    ipv6 mld snooping running version 1 or 2

**Default:**

Version 1

**Mode:**

Global Configuration

**Usage Guide:**

When ipv6 mld snooping version is 1 ,the version 2 packet is not process.The configure can use '**show ipv6 mld snooping**'.

**Example:**

This example shows how to set ipv6 mld snooping version 2.

```
Switch(config)# ipv6 mld snooping version 2
Switch# show ipv6 mld snooping
MLD Snooping Status

Snooping : Enabled
Report Suppression : Disabled
Operation Version : v2
Forward Method : mac
Unknown Multicast Action : Flood
```

## 4.17.4 ipv6 mld snooping vlan

**Command:**

```
ipv6 mld snooping vlan VLAN-LIST

no ipv6 mld snooping vlan VLAN-LIST

show ipv6 mld snooping vlan [VLAN-LIST]
```

**Parameter:**

**VLAN-LIST** specifies VLAN ID list to set

**Default:**

Disabled

**Mode:**

Global Configuration

**Usage Guide:**

'**no ipv6 mld snooping vlan 1**' will clear vlan all ipv6 mld snooping dynamic group and dynamic router port, and make the static ipv6 mld group invalid with vlan ID is vlan 1. Then do not learning the dynamic group and router port by mld message for vlan 1.

The configure can use 'show ipv6 mld snooping vlan 1'.

**Example:**

This example shows how to set ipv6 mld snooping vlan.

```
Switch(config)# ipv6 mld snooping
Switch(config)# ipv6 mld snooping vlan 1
Switch# show ipv6 mld snooping vlan 1
MLD Snooping is globally enabled
MLD Snooping VLAN 1 admin : enabled
MLD Snooping oper mode : enabled
MLD Snooping robustness: admin 2 oper 2
MLD Snooping query interval: admin 125 sec oper 125 sec
MLD Snooping query max response : admin 10 sec oper 10 sec
MLD Snooping last member query counter: admin 2 oper 2
MLD Snooping last member query interval: admin 1 sec oper 1 sec
MLD Snooping last immediate leave: disabled
MLD Snooping automatic learning of multicast router ports: enabled
Switch(config)# no ipv6 mld snooping vlan 1
Switch# show ipv6 mld snooping vlan 1
MLD Snooping is globally enabled
MLD Snooping VLAN 1 admin : disabled
MLD Snooping oper mode : disabled
MLD Snooping robustness: admin 2 oper 2
MLD Snooping query interval: admin 125 sec oper 125 sec
MLD Snooping query max response : admin 10 sec oper 10 sec
MLD Snooping last member query counter: admin 2 oper 2
MLD Snooping last member query interval: admin 1 sec oper 1 sec
MLD Snooping last immediate leave: disabled
```

MLD Snooping automatic learning of multicast router ports: enabled

## 4.17.5 ipv6 mld snooping vlan parameters

Command:

```

ipv6 mld snooping vlan <VLAN-LIST> last-member-query-count <1-7>

no ipv6 mld snooping vlan <VLAN-LIST> last-member-query-count

ipv6 mld snooping vlan <VLAN-LIST> last-member-query-interval <1-60>

no ipv6 mld snooping vlan <VLAN-LIST> last-member-query-interval

[no] ipv6 mld snooping vlan <VLAN-LIST> router learn pim-dvmrp

[no] ipv6 mld snooping vlan <VLAN-LIST> fastleave

ipv6 mld snooping vlan <VLAN-LIST> query-interval <30-18000>

no ipv6 mld snooping vlan <VLAN-LIST> query-interval

ipv6 mld snooping vlan <VLAN-LIST> response-time <5-20>

no ipv6 mld snooping vlan <VLAN-LIST> response-time

ipv6 mld snooping vlan <VLAN-LIST> robustness-variable <1-7>

no ipv6 mld snooping vlan <VLAN-LIST> robustness-variable

```

Parameter:

|                                                |                                                         |
|------------------------------------------------|---------------------------------------------------------|
| <b>login</b>                                   | Add/Edit login authentication list                      |
| <b>VLAN-LIST</b>                               | Specify VLAN ID list to set                             |
| <b>last-member-query-count &lt;1-7&gt;</b>     | Specify last member query count to set. Default is 2    |
| <b>last-member-query-interval &lt;1-60&gt;</b> | Specify last member query interval to set. Default is 1 |

**interval <1-60>**  
**query-interval** Specify query interval to set. Default is 125  
**<30-18000>**  
**response-time** Specify a response time to set. default is 10  
**<5-20>**  
**robustness-variabl** Specify a robustness value to set, default is 2  
**e <1-7>**

**Mode:**

Global Configuration

**Usage Guide:**

'no ipv6 mld snooping vlan 1 (last-member-query-count | last-member-query-interval | query-interval | response-time | robustness-variable)' will set the vlan parameters to default.

The cli setting will change the ipv6 mld vlan parameters admin settings.

The configure can use 'show ipv6 mld snooping vlan 1'.

**Example:**

This example shows how to set ipv6 mld snooping vlan parameters.

```
Switch(config)# ipv6 mld snooping vlan 1 fastleave
Switch(config)# ipv6 mld snooping vlan 1 last-member-query-count 5
Switch(config)# ipv6 mld snooping vlan 1 last-member-query-interval 3
Switch(config)# ipv6 mld snooping vlan 1 query-interval 100
Switch(config)# ipv6 mld snooping vlan 1 response-time 12
Switch(config)# ipv6 mld snooping vlan 1 robustness-variable 4
Switch# show ipv6 mld snooping vlan 1
MLD Snooping is globally enabled
MLD Snooping VLAN 1 admin : disabled
MLD Snooping oper mode : disabled
MLD Snooping robustness: admin 4 oper 2
MLD Snooping query interval: admin 100 sec oper 125 sec
MLD Snooping query max response : admin 12 sec oper 10 sec
MLD Snooping last member query counter: admin 5 oper 2
MLD Snooping last member query interval: admin 3 sec oper 1 sec
MLD Snooping last immediate leave: enabled
MLD Snooping automatic learning of multicast router ports: enabled
```

**4.17.6 ipv6 mld snooping vlan static-port**

**Command:**

```
[no] ipv6 mld snooping vlan <VLAN-LIST> static-port IF_PORTS
```

```
[no] ipv6 mld snooping vlan <VLAN-LIST> forbidden-port IF_PORTS
```

**Parameter:**

|                  |                                      |
|------------------|--------------------------------------|
| <b>VLAN-LIST</b> | Specify VLAN ID list to set          |
| <b>IF_PORTS</b>  | Specify a port list to set or remove |

**Default:**

None static/forbidden ports

**Mode:**

Global Configuration

**Usage Guide:**

'**ipv6 mld snooping vlan 1 static-port gi1-2**' will add static port gi1-2 for vlan 1. The all known vlan 1 ipv6 group will add the static ports.

'**ipv6 mld snooping vlan 1 forbidden-port gi3-4**' will add forbidden port gi3-4 for vlan 1. The all known vlan 1 ipv6 group will remove the forbidden ports.

The configuration can use '**show ipv6 mld snooping forward-all**'.

**Example:**

This example shows how to set ipv6 mld snooping static/forbidden port

```
Switch(config)# ipv6 mld snooping vlan 1 static -port gi1-2
Switch(config)# ipv6 mld snooping vlan 1 forbidden -port gi3-4
Switch# show ipv6 mld snooping forward-all vlan 1
MLD Snooping VLAN : 1
MLD Snooping static port : gi1-2
MLD Snooping forbidden port : gi3-4
```

## 4.17.7 ipv6 mld snooping vlan static-router-port

**Command:**

```
[no] ipv6 mld snooping vlan <VLAN-LIST> static-router-port IF_PORTS
```

```
[no] ipv6 mld snooping vlan <VLAN-LIST> forbidden-router-port IF_PORTS
```



**Parameter:**

- VLAN-LIST** specifies VLAN ID list to set
- IF\_PORTS** specifies a port list to set or remove

**Default:**

None static/forbidden router ports

**Mode:**

Global Configuration

**Usage Guide:**

'**ipv6 mld snooping vlan 1 static-router-port gi1-2**' will add static router port gi1-2 for vlan 1.

'**ipv6 mld snooping vlan 1 forbidden-router-port gi2**' will add forbidden router port gi2 for vlan 1.

This will also remove gi2 from static router port. The forbidden router port received query will not forward.

The configure can use show ipv6 mld snooping router.

**Example:**

This example shows how to set ipv6 mld snooping static/forbidden.

```
Switch(config)# ipv6 mld snooping vlan 1 static-router-port gi1-2
Switch(config)# ipv6 mld snooping vlan 1 forbidden-router-port gi2
Switch# show ipv6 mld snooping router
Dynamic Router Table
VID | Port | Expiry Time(Sec)
-----+-----+-----
Total Entry 0
Static Router Table VID | Port Mask
-----+-----
1 | gi1
Total Entry 1
Forbidden Router Table
VID | Port Mask
-----+-----
1 | gi2
Total Entry 1
```

## 4.17.8 ipv6 mld snooping vlan static-group

**Command:**

```
[no] ipv6 mld snooping vlan <VLAN-LIST> static-group <ip-addr> interfaces
IF_PORTS

[no] ipv6 mld snooping vlan <VLAN-LIST> group <ip-addr>
```

**Parameter:**

- VLAN-LIST** specifies VLAN ID list to set
- ip-addr** specifies multicast group ipv4 address
- IF\_PORTS** specifies port list to set or remove

**Mode:**

Global Configuration

**Usage Guide:**

'**ipv6 mld snooping vlan 1 static-group ff12::1 interfaces gi1**' will add static group.

The static group will not learning others dynamic port. If the dynamic group exist, then the static group will overlap the dynamic group. If remove the last member of static group, the static group will be delete.

The static group want to valid , must mld snooping vlan enable and ipv6 mld snooping enable.

The configure can use '**show ipv6 mld snooping groups [(dynamic | static)]**' to display. And can use '**no ipv6 mld snooping vlan 1 group ff12::1**' to delete the static group. Also can use '**clear ipv6 mld snooping groups**' to delete the static group.

**Example:**

This example shows how to set ipv6 mld snooping static group.

```
Switch(config)# ipv6 mld snooping vlan 1 static-group ff12::1 interfaces gi1-2
Switch# show ipv6 mld snooping groups
VLAN | Gourp IP Address | Type | Life(Sec) | Port
-----+-----+-----+-----+-----
1 | ff12::1 | Static| -- | gi1-2
Total Number of Entry = 1
Switch# clear ipv6 mld snooping groups static
Switch# show ipv6 mld snooping groups
VLAN | Gourp IP Address | Type | Life(Sec) | Port
-----+-----+-----+-----+-----
Total Number of Entry = 0
```

## 4.17.9 ipv6 mld profile

**Command:**

```

ipv6 mld profile <1-128>
profile range ipv6 <ipv6-addr> [ipv6-addr] action (permit | deny)
show ipv6 mld profile [<1-128>]

```

**Parameter:**

|                          |                                                             |
|--------------------------|-------------------------------------------------------------|
| <b>&lt;1-128&gt;</b>     | specifies profile ID                                        |
| <b>&lt;ipv6-addr&gt;</b> | Start ipv6 multicast address                                |
| <b>[ipv6-addr]</b>       | End ipv6 multicast address                                  |
| <b>(permit   deny)</b>   | permit: allow Multicast address range ipv6 address learning |

**Mode:**

```

ipv6 mld profile <1-128>
Global Configuration
profile range ipv6 <ipv6-addr> [ipv6-addr] action (permit | deny)
mld profile config mode

```

**Usage Guide:**

Use '**ipv6 mld profile 1**' entry to the mld profile config mode.

User '**profile range ipv6 ff12::1 ff12::8 action permit**' to configure the profile entry.

The profile entry is used by port filter.

The configure can use '**show ipv6 mld profile [<1-128>]**' to display

**Example:**

This example shows how to set ipv6 mld profile.

```

Switch(config)# ipv6 mld profile 1
Switch(config-mld-profile)# profile range ipv6 ff13::1 ff13::10 action permit
Switch(config-mld-profile)#show ipv6 mld profile
IPv6 mld profile index: 1
IPv6 mld profile action: permit
Range low ip: ff13::1
Range high ip: ff13::10
Switch(config-mld-profile)#exit
Switch(config)# ipv6 mld profile 5
Switch(config-mld-profile)# profile range ipv6 ff12::1 ff12::12 action deny
Switch(config-mld-profile)#show ipv6 mld profile
IPv6 mld profile index: 5
IPv6 mld profile action: deny
Range low ip: ff12::1
Range high ip: ff12::12

```

```

Switch(config-mld-profile)#exit
Switch(config)# exit
Switch# show ipv6 mld profile
IPv6 mld profile index: 1
IPv6 mld profile action: permit
Range low ip: ff13::1
Range high ip: ff13::10
IPv6 mld profile index: 5
IPv6 mld profile action: deny
Range low ip: ff12::1
Range high ip: ff12::12

```

## 4.17.10 ipv6 mld filter

### Command:

```

ipv6 mld profile <1-128>

profile range ipv6 <ipv6-addr> [ipv6-addr] action (permit | deny)

show ipv6 mld profile [<1-128>]

```

### Parameter:

|                                  |                                 |
|----------------------------------|---------------------------------|
| <b>&lt;1-128&gt;</b>             | specifies profile ID            |
| <b>[interfaces<br/>IF_PORTS]</b> | Specifies interfaces to display |

### Mode:

Interface mode

### Usage Guide:

After create ipv6 mld profile entry. Can use '**ipv6 mld filter 1**' to bind a profile for port.

When then port bind a profile. Then the port learning group will update, if the group is not match the profile rule it will remove the port from the group. Static group is excluded.

The configure can use '**show ipv6 mld filter**' to display

### Example:

This example shows how to set ipv6 mld filter

```

Switch(config)# ipv6 mld profile 1
Switch(config-igmp-profile)# profile range ipv6 ff13::1 ff13::10 action permit
Switch(config-igmp-profile)#exit
Switch(config)# interface gi1
Switch(config-if)# ipv6 mld filter 1
Switch(config-if)#exit
Switch(config)# exit
Switch# show ipv6 mld filter
Port ID | Profile ID
-----+-----
gi1 : 1
gi2 : None
gi3 : None
gi4 : None gi5 : None

```

## 4.17.11 ipv6 mld max-groups

### Command:

```

ipv6 mld max-groups <0-256>

no ipv6 mld max-groups

ipv6 mld max-groups action (deny | replace)

show ipv6 mld max-group [interfaces IF_PORTS]

show ipv6 mld max-group action [interfaces IF_PORTS]

```

### Parameter:

**<1-128>** specifies profile ID

**(deny | replace)** Deny: current port ipv6 group arrived max-groups, don't add group.

### Default:

no ipv6 mld max-groups  
 ipv6 mld max-groups action deny

### Mode:

Interface mode

**Usage Guide:**

use 'ipv6 mld max-groups 10' to limit port learning max group num is 10.

When then port had learned more than 10 groups, then the more than 10 group will be remove the port form group. static group is excluded.

The configure can use 'show ipv6 mld max-group & show ipv6 mld max-group action ' to display

**Example:**

This example shows how to set ipv6 mld max-groups and action is replace

```
Switch(config)# interface gi1
Switch(config-if)# ipv6 mld max-groups 10
Switch(config-if)# ipv6 mld max-groups action replace
Switch(config-if)#exit
Switch(config)# exit
Switch# show ipv6 mld max-group
Port ID | Max Group
-----+-----
gi1 : 10 gi2 : 256
gi3 : 256
gi4 : 256
gi5 : 256
--More--
Switch# show ipv6 mld max-group action
Port ID | Max-groups Action
-----+----- gi1 : replace
gi2 : deny
gi3 : deny gi4 : deny
gi5 : deny
--More--
```

## 4.17.12 clear ipv6 mld snooping groups

**Command:**

```
clear ipv6 mld snooping groups [(dynamic | static)]
```

**Parameter:**

**None** Clear ipv6 mld groups include dynamic and static  
**(dynamic | static)** ipv6 mld group type is dynamic or static

**Default:**

clear all ipv6 mld groups

**Mode:**

Privileged mode

**Usage Guide:**

This command will clear the ipv6 mld groups for dynamic or static or all of type.

The configuration can use '**show ipv6 mld snooping groups**' to check.

**Example:**

This example shows how to clear ipv6 mld snooping groups

```
Switch# clear ipv6 mld snooping groups static
```

```
Switch# show ipv6 mld snooping groups
```

```
Switch# clear ipv6 mld snooping groups
```

```
Switch# show ipv6 mld snooping groups
```

## 4.17.13 clear ipv6 mld snooping statistics

**Command:**

```
clear ipv6 mld snooping statistics
```

**Mode:**

privileged mode

**Usage Guide:**

This command will clear the mld statistics.

The configure can use show ipv6 mld snooping.

**Example:**

This example shows how to clear ipv6 mld snooping statistics

```
Switch# clear ipv6 mld snooping statistics
Switch# show ipv6 mld snooping
```

## 4.17.14 show ipv6 mld snooping groups counters

**Command:**

```
show ipv6 mld snooping groups counters
```

**Mode:**

privileged mode

**Usage Guide:**

This command will display the ipv6 mld group counter include static group.

**Example:**

This example shows how to display ipv6 mld snooping group counter

```
Switch# show ipv6 mld snooping counters
```

## 4.17.15 show ipv6 mld snooping groups

**Command:**

```
show ipv6 mld snooping groups [(dynamic | static)]
```

**Parameter:**

|                           |                                                  |
|---------------------------|--------------------------------------------------|
| <b>none</b>               | Show ipv6 mld groups include dynamic and static  |
| <b>(dynamic   static)</b> | Display ipv6 mld group type is dynamic or static |

**Mode:**

Privileged mode

**Usage Guide:**

This command will display the ipv6 mld groups for dynamic or static or all of type.



**Example:**

This example shows show ipv6 mld snooping groups

```
Switch# show ipv6 mld snooping groups
Switch# show ipv6 mld snooping groups dynamic
Switch# show ipv6 mld snooping groups static
```

## 4.17.16 show ipv6 mld snooping router

**Command:**

```
show ipv6 mld snooping router [(dynamic | forbidden |static)]
```

**Parameter:**

**none** Show ipv6 mld router include dynamic and static and forbidden  
**(dynamic | forbidden | static)** Display ipv6 mld router info for different type

**Mode:**

privileged mode

**Usage Guide:**

This command will display the ipv6 mld router info.

**Example:**

This example shows how to show ipv6 mld snooping router

```
Switch# show ipv6 mld snooping router
Switch# show ipv6 mld snooping router dynamic
Switch# show ipv6 mld snooping rotuer static
Switch# show ipv6 mld snooping rotuer forbidden
```

## 4.17.17 show ipv6 mld snooping

**Command:**

```
show ipv6 mld snooping
```

**Mode:**

privileged mode

**Usage Guide:**

This command will display ipv6 mld snooping global info.

**Example:**

This example shows how to show ipv6 mld snooping

```
Switch# show ipv6 mld snooping
MLD Snooping Status

Snooping : Disabled
Report Suppression : Enabled
Operation Version : v1
Forward Method : mac
Unknown Multicast Action : Flood
Packet Statistics
Total RX : 0
Valid RX : 0
Invalid RX : 0
Other RX : 0
Leave RX : 0
Report RX : 0
General Query RX : 0
Specail Group Query RX : 0
Specail Group & Source Query RX : 0
Leave TX : 0
Report TX : 0
General Query TX : 0
Specail Group Query TX : 0
Specail Group & Source Query TX : 0
```

## 4.17.18 show ipv6 mld snooping vlan

**Command:**

```
show ipv6 mld snooping vlan [VLAN-LIST]
```

**Parameter:**

**[VLAN-LIST]** Show specifies vlan ipv6 mld snooping info

**Mode:**

privileged mode

**Usage Guide:**

This command will display ipv6 mld snooping vlan info.

**Example:**

This example shows how to show ipv6 mld snooping vlan

```
Switch# show ipv6 mld snooping vlan
MLD Snooping is globally disabled
MLD Snooping VLAN 1 admin : disabled
MLD Snooping oper mode : disabled
MLD Snooping robustness: admin 2 oper 2
MLD Snooping query interval: admin 125 sec oper 125 sec
MLD Snooping query max response : admin 10 sec oper 10 sec
MLD Snooping last member query counter: admin 2 oper 2
MLD Snooping last member query interval: admin 1 sec oper 1 sec
MLD Snooping last immediate leave: disabled
MLD Snooping automatic learning of multicast router ports: enabled
```

## 4.17.19 show ipv6 mld snooping forward-all

**Command:**

```
show ipv6 mld snooping forward-all [vlan VLAN-LIST]
```

**Parameter:**

**[vlan VLAN-LIST]** Show specifies vlan of ipv6 mld forward info.

**Mode:**

privileged mode

**Usage Guide:**

This command will display ipv6 mld snooping forward all info.

**Example:**

This example shows how to show ipv6 mld snooping forward-all

```
Switch# show ipv6 mld snooping forward-all
MLD Snooping VLAN : 1
MLD Snooping static port : None
MLD Snooping forbidden port : None
```

## 4.17.20 show ipv6 mld profile

**Command:**

```
show ipv6 mld profile [<1-128>]
```

**Parameter:**

[<1-128>]            Show specifies index profile info

**Mode:**

privileged mode

**Usage Guide:**

This command will display ipv6 mld profile info.

**Example:**

This example shows how to show ipv6 mld profile

```
Switch# show ipv6 mld profile
IPv6 mld profile index: 1
IPv6 mld profile action: permit
Range low ip: ff13::1
Range high ip: ff13::10
```

## 4.17.21 show ipv6 mld filter

**Command:**

```
show ipv6 mld filter [interfaces IF_PORTS]
```

**Parameter:**

**[interfaces**            Show specifies ports filter  
**IF\_PORTS]**

**Mode:**

privileged mode

**Usage Guide:**

This command will display ipv6 mld port filter info.

**Example:**

This example shows how to show ipv6 mld filter

```
Switch# show ipv6 mld filter
Port ID | Profile ID
-----+-----
gi1 : 1
gi2 : None
gi3 : None
gi4 : None gi5 : None
--More--
```

## 4.17.22 show ipv6 mld max-group

**Command:**

```
show ipv6 mld max-group [interfaces IF_PORTS]
```

**Parameter:**

**[interfaces**            Show specifies ports max-group  
**IF\_PORTS]**

**Mode:**

privileged mode

**Usage Guide:**

This command will display ipv6 mld port max-group.

**Example:**

This example shows how to show ipv6 mld max-group.

```
Switch(config)#interface gi1
Switch(config-if)# ipv6 mld max-groups 50
Switch(config-if)#exit
Switch(config)#exit
Switch# show ipv6 mld max-group
Port ID | Max Group
-----+-----
gi1 : 50 gi2 : 256
gi3 : 256
gi4 : 256
gi5 : 256
--More--
```

## 4.17.23 show ipv6 mld max-group action

**Command:**

```
show ipv6 mld max-group action [interfaces IF_PORTS]
```

**Parameter:**

**[interfaces**            Show specifies ports max-group action  
**IF\_PORTS]**

**Mode:**

privileged mode

**Usage Guide:**

This command will display ipv6 mld port max-group action.

**Example:**

This example shows how to show ipv6 mld max-group action.

```
Switch(config)#interface gi1
Switch(config-if)# ipv6 mld max-groups action replace
Switch(config-if)#exit
Switch(config)#exit
```

```
Switch# show ipv6 mld max-group action
```

```
Port ID | Max-groups Action
```

```
-----+----- gi1 : replace
```

```
gi2 : deny
```

```
gi3 : deny gi4 : deny
```

```
gi5 : deny
```

```
--More--
```

## 4.18 Port Security

### 4.18.1 port-security

**Command:**

```
port-security

no port-security
```

**Default:**

Default is disabled

**Mode:**

Global Configuration

**Usage Guide:**

The “**port-security**” command enables the port security functionality on this port.

Use the **no** form of this command to disable

**Example:**

This example shows how to enable port security on port 1 and set the learning limit number to 10.

```
switch(config)# interface gi1
switch(config-if)# port-security address-limit 10 action discard
switch(config-if)# port-security
switch(config)# show port-security interfaces gi1
Port | Mode | Security | CurrentAddr | Action
-----+-----+-----+-----+-----
gi1 | Dynamic | Enabled (10) | 0 | Discard
```

### 4.18.2 port-security address-limit

**Command:**

```
port-security address-limit <1-256> action (forward|discard|shutdown)

no dot1x port-control address-limit
```



**Parameter:**

|                 |                                                                                                             |
|-----------------|-------------------------------------------------------------------------------------------------------------|
| <1-256>         | The learning-limit number. It specifies how many MAC addresses this port can learn                          |
| <b>forward</b>  | Forward this packet whose SMAC is new to system and exceed the learning-limit number                        |
| <b>discard</b>  | Discard this packet whose SMAC is new to system and exceed the learning-limit number.                       |
| <b>shutdown</b> | Shutdown this port when receives a packet whose SMAC is new to system and exceed the learning limit number. |

**Default:**

The address-limit default is 10 and action is “discard”.

**Mode:**

Interface Configuration

**Usage Guide:**

Use the “**port-security address-limit**” command to set the learning-limit number and the violation action. Use the **no** form of this command to restore the default settings.

**Example:**

The following example shows how to enable port security on port 1 and set the learning limit number to 10.

```
switch(config)# interface gi1
switch(config-if)# port-security address-limit 10 action discard
switch(config-if)# port-security
switch(config)# show port-security interfaces gi1
Port | Mode | Security | CurrentAddr | Action
-----+-----+-----+-----+-----
gi1 | Dynamic | Enabled (10) | 0 | Discard
```

### 4.18.3 show port-security

**Command:**

```
show port-security interface IF_PORTS
```

**Parameter:**

|                 |                                                   |
|-----------------|---------------------------------------------------|
| <b>IF_PORTS</b> | Select port to show port-security configurations. |
|-----------------|---------------------------------------------------|

**Mode:**

Privileged EXEC

**Usage Guide:**

Use “**show port-security interfaces**” command to show port-security information of the specified port.

**Example:**

This example shows how to show port-security configurations on interface gi1.

```
Switch# show port-security interfaces gi1
Port | Mode | Security | CurrentAddr | Action
-----+-----+-----+-----+-----
gi1 | Dynamic | Enabled (10) | 0 | Discard
```

## 4.19 Port Error Disable

### 4.19.1 errdisable recovery cause

**Command:**

```
errdisable recovery cause (all | acl | arp-inspection | broadcast-flood | bpduguard |
dhcp-rate-limit | psecure-violation | unicast-flood | udld | unknown-multicast-flood |
selfloop)

no errdisable recovery cause (all | acl | arp-inspection | broadcast-flood | bpduguard
| dhcp-rate-limit | psecure-violation | unicast-flood | udld | unknown-multicast-flood |
selfloop)
```

**Parameter:**

|                                |                                                                                                          |
|--------------------------------|----------------------------------------------------------------------------------------------------------|
| <b>all</b>                     | Enable/Disable to auto recovery for port error disabled by all reasons                                   |
| <b>acl</b>                     | Enable/Disable to auto recovery for port error disabled by ACL shutdown port reason.                     |
| <b>arp-inspection</b>          | Enable/Disable to auto recovery for port error disabled by arp-inspection reason.                        |
| <b>broadcast-flood</b>         | Enable/Disable to auto recovery for port error disabled by storm control broadcast flood reason.         |
| <b>bpduguard</b>               | Enable/Disable to auto recovery for port error disabled by STP BPDU Guard reason.                        |
| <b>dhcp-rate-limit</b>         | Enable/Disable to auto recovery for port error disabled by dhcp-rate-limit reason.                       |
| <b>psecure-violation</b>       | Enable/Disable to auto recovery for port error disabled by violate port security rule reason.            |
| <b>unicast-flood</b>           | Enable/Disable to auto recovery for port error disabled by storm control unicast flood reason.           |
| <b>udld</b>                    | Enable/Disable to auto recovery for port error disabled by udld reason.                                  |
| <b>unknown-multicast-flood</b> | Enable/Disable to auto recovery for port error disabled by storm control unknown multicast flood reason. |
| <b>selfloop</b>                | Enable/Disable to auto recovery for port error disabled by self loop detect reason.                      |

**Default:**

Default auto recover state for all reasons are disabled.

**Mode:**

Global Configuration

**Usage Guide:**

Port will be disabled by some invalid actions detected by protocols. Administrator can enable these error disabled port manually by “**no shutdown**” command in Interface Mode, or just turn on the auto recovery mechanism by this command to auto enable the error disabled port after auto recovery interval.

**Example:**

This example shows how to enable auto recovery with reason bpduguard and broadcast-flood.

```
Switch(config)# errdisable recovery cause bpduguard
Switch(config)# errdisable recovery cause broadcast-flood
```

This example shows how to show current auto recovery state of each reason and port error disabled status.

```
Switch# show errdisable recovery
ErrDisable Reason | Timer Status
-----+-----
bpduguard | enabled
udld | disabled
selfloop | disabled
broadcast-flood | enabled
unknown-multicast-flood | disabled
unicast-flood | disabled
acl | disabled
psecure-violation | disabled
dhcp-rate-limit | disabled
arp-inspection | disabled
Timer Interval : 300 seconds
Interfaces that will be enabled at the next timeout:
Port | Error Disable Reason | Time Left
----+-----+-----
```

## 4.19.2 errdisable recovery interval

**Command:**

```
errdisable recovery interval <0-86400>
```

**Parameter:**

**<0-86400>** Specify the auto recovery interval with unit second.

**Default:**

Default auto recovery interval is 300 second.

**Mode:**

Global Configuration

**Usage Guide:**

Port will be disabled by some invalid actions detected by protocols. Auto recovery mechanism will enable these error disabled port after a while. This command configures how long the port will be enabled after error disabled.

**Example:**

This example shows how to configure the auto recovery interval to 600 seconds.

```
Switch(config)# errdisable recovery interval 600
```

This example shows how to show current auto recovery interval

```
Switch# show errdisable recovery
ErrDisable Reason | Timer Status
-----+-----
bpdguard | enabled
udld | disabled
selfloop | disabled
broadcast-flood | enabled
unknown-multicast-flood | disabled
unicast-flood | disabled
acl | disabled
psecure-violation | disabled
dhcp-rate-limit | disabled
arp-inspection | disabled
Timer Interval : 600 seconds
Interfaces that will be enabled at the next timeout:
Port | Error Disable Reason | Time Left
-----+-----+-----
```

### 4.19.3 show errdisable recovery

**Command:**

```
show errdisable recovery
```

**Mode:**

Privileged EXEC

**Usage Guide:**

Use “**show errdisable recovery**” command to show each error disable state, error disable recovery interval and current error disabled port status.

**Example:**

This example shows how to show current auto recovery interval

```
Switch# show errdisable recovery
ErrDisable Reason | Timer Status
-----+-----
bpduguard | enabled
udld | disabled
selfloop | disabled
broadcast-flood | enabled
unknown-multicast-flood | disabled
unicast-flood | disabled
acl | disabled
psecure-violation | disabled
dhcp-rate-limit | disabled
arp-inspection | disabled
Timer Interval : 600 seconds
Interfaces that will be enabled at the next timeout:
Port | Error Disable Reason | Time Left
-----+-----+-----
```

## 4.20 Port

### 4.20.1 description

**Command:**

```
description WORD<1-32>
```

```
no description
```

**Parameter:**

**WORD<1-32>** Specify port description string

**Mode:**

Interface Configuration

**Usage Guide:**

Use “**description**” command to give the port a name to identify it easily.

If description includes space character, please use double quoted to wrap it.

Use no form to restore description to empty string.

**Example:**

This example shows how to modify port descriptions.

```
Switch(config)# interface gi1
Switch(config-if)# description userport
Switch(config-if)# exit
Switch(config)# interface gi2
Switch(config-if)# description "uplink port"
```

This example shows how to show current port description on interface fa1 and fa2

```
Switch# show interfaces gi1-2 status
Port Name Status Vlan Duplex Speed Type
gi1 userport notconnect 1 auto auto Copper
gi2 uplink port notconnect 1 auto auto Copper
```

## 4.20.2 speed

### Command:

```
speed (10 | 100 | 1000)

speed auto [(10 | 100 | 1000 | 10/100)]
```

### Parameter:

|               |                                                                         |
|---------------|-------------------------------------------------------------------------|
| <b>10</b>     | Specify port speed to force 10Mbps/s or auto with 10Mbps/s ability.     |
| <b>100</b>    | Specify port speed to force 100Mbps/s or auto with 100Mbps/s ability.   |
| <b>1000</b>   | Specify port speed to force 1000Mbps/s or auto with 1000Mbps/s ability. |
| <b>10/100</b> | Specify port speed to auto with 10Mbps/s and 100Mbps/s                  |

### Default:

Default port speed is auto with all available abilities.

### Mode:

Interface Configuration

### Usage Guide:

Use “**speed**” command to change port speed configuration. The speed is only able to configure to the physical maximum speed. For example, in fast Ethernet port, speed 1000 is not available.

### Example:

This example shows how to modify port speed configuration.

```
Switch(config)# interface gi1
Switch(config-if)# speed 100
Switch(config-if)# exit
Switch(config)# interface gi2
Switch(config-if)# speed auto 10/100
```

This example shows how to show current speed configuration

```
Switch# show running-config interfaces gi1-2
interface gi1
speed 100
interface gi2
speed auto 10/100
```



This example shows how to show current interface link speed

```
Switch# show interfaces gi1-2 status
Port Name Status Vlan Duplex Speed Type
gi1 connected 1 a-full a-100M Copper
gi2 connected 1 a-full a-100M Copper
```

## 4.20.3 duplex

### Command:

```
duplex (auto | full | half)
```

### Parameter:

|             |                                           |
|-------------|-------------------------------------------|
| <b>auto</b> | Specify port duplex to auto negotiation.  |
| <b>full</b> | Specify port duplex to force full duplex. |
| <b>half</b> | Specify port duplex to force half duplex. |

### Default:

Default port duplex is auto.

### Mode:

Interface Configuration

### Usage Guide:

Use “**duplex**” command to change port duplex configuration.

### Example:

This example shows how to add a login authentication list to authenticate with order tacacs+, radius, local.

```
Switch(config)# aaa authentication login test1 tacacs+ radius local
```

## 4.20.4 flow-control

### Command:

```
flow-control (off | on)
```

```
no flow-control
```

**Parameter:**

**off** Disable port flow control.  
**on** Enable port flow control.

**Default:**

Default port flow control is off.

**Mode:**

Interface Configuration

**Usage Guide:**

Use "**flow-control**" command to change port flow control configuration.

Use no form to restore flow control to default (off) configuration.

**Example:**

This example shows how to modify port duplex configuration.

```
Switch(config)# interface gi1
Switch(config-if)# flow-control on
```

This example shows how to show current flow control configuration

```
Switch# show interfaces gi1
Hardware is Gigabit
Full-duplex, Auto-speed, media type is Copper
flow-control is on
0 packets input, 0 bytes, 0 throttles
Received 0 broadcasts (0 multicasts)
0 runts, 0 giants, 0 throttles
0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored
0 multicast, 0 pause input
0 input packets with dribble condition detected
379 packets output, 31981 bytes, 0 underrun
0 output errors, 0 collisions, 0 interface resets
0 babbles, 0 late collision, 0 deferred
0 PAUSE output
```

## 4.20.5 shutdown

**Command:**

```
shutdown

no shutdown
```

**Mode:**

Interface Configuration

**Usage Guide:**

Use “**shutdown**” command to disable port and use “**no shutdown**” to enable port. If port is error disabled by some reason, use “no shutdown” command can also recovery the port manually.

**Example:**

This example shows how to modify port duplex configuration.

```
Switch(config)# interface gi1
Switch(config-if)# shutdown
```

This example shows how to show current admin state configuration

```
Switch# show running-config interfaces gi1

interface gi1
shutdown
```

## 4.20.6 jumbo-frame

**Command:**

```
jumbo-frame <64-9216>
```

**Parameter:**

**<64-9216>** Specify the maximum frame size.

**Default:**

Default maximum frame size is 1522.

**Mode:**

Interface Configuration

**Usage Guide:**

Use “**jumbo-frame**” command to modify maximum frame size.

The only way to show this configuration is using “**show running-config**” command.

**Example:**

This example shows how to modify maximum frame size on gi1 to 9216 bytes.

```
Switch(config)# interface gi1
Switch(config-if)# jumbo-frame 9216
```

This example shows how to show current jumbo-frame size

```
Switch# show running-config interface gi1

interface gi1

jumbo-frame 9216
```

## 4.20.7 protected

**Command:**

```
protected

no protected
```

**Mode:**

Interface Configuration

**Usage Guide:**

Use “**protected**” command to make port to be protected. Protected port is only allowed to communicate with unprotected port. In other words, protected port is not allowed to communicate with another protected port.

Use no form to make port unprotected.

**Example:**

This example shows how to configure port fa1 and fa2 to be protected port.

```
Switch(config)# interface range gi1-2
Switch(config-if-range)# protected
```

This example shows how to show current protected port state.

```
Switch# show interfaces gi1-2 protected
Port | Protected State
-----+-----
gi1 | enabled
gi2 | enabled
```

## 4.20.8 eee

### Command:

```
eee
no eee
```

### Default:

Default eee state is disabled.

### Mode:

Interface Configuration

### Usage Guide:

Use “**eee**” command to make port to enable the energy efficient Ethernet feature and use “**no eee**” command to disable it.

The only way to show this configuration is using “**show running-config**” command.

### Example:

This example shows how to configure port gi1 to be protected port.

```
Switch(config)# interface gi1
Switch(config-if)# eee
```

This example shows how to show current jumbo-frame size

```
Switch# show running-config interface gi1
interface gi1
eee
```

## 4.20.9 clear interface

**Command:**

```
clear interfaces IF_PORTS counters
```

**Parameter:**

*IF\_PORTS* Specify port to clear counters.

**Mode:**

Privileged EXEC

**Usage Guide:**

Use “**clear interface**” command to clear counters on specific ports.

**Example:**

This example shows how to clear counters on port gi1.

```
Switch(config)# clear interfaces gi1 counters
```

This example shows how to show current counters

```
Switch# show interfaces gi1
Hardware is gigabit
Auto-duplex, Auto-speed, media type is Copper
flow-control is off
0 packets input, 0 bytes, 0 throttles
Received 0 broadcasts (0 multicasts)
0 runts, 0 giants, 0 throttles
0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored
0 multicast, 0 pause input
0 input packets with dribble condition detected
0 packets output, 0 bytes, 0 underrun
0 output errors, 0 collisions, 0 interface resets
0 babbles, 0 late collision, 0 deferred
0 PAUSE output
```

## 4.20.10 show interface

### Command:

```
show interfaces IF_PORTS

show interfaces IF_PORTS status

show interfaces IF_PORTS protected
```

### Parameter:

*IF\_PORTS* Specify port to show.

### Mode:

Privileged EXEC

### Usage Guide:

Use “**show interface**” command to show port counters, parameters and status.

### Example:

This example shows how to show current counters

```
Switch# show interfaces gi1
Hardware is Gigabit
Auto-duplex, Auto-speed, media type is Copper
flow-control is off
0 packets input, 0 bytes, 0 throttles
Received 0 broadcasts (0 multicasts)
0 runts, 0 giants, 0 throttles
0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored
0 multicast, 0 pause input
0 input packets with dribble condition detected
0 packets output, 0 bytes, 0 underrun
0 output errors, 0 collisions, 0 interface resets
0 babbles, 0 late collision, 0 deferred
0 PAUSE output
```

This example shows how to show current protected port state.

```
Switch# show interfaces gi1-2 protected
```

```
Port | Protected State
-----+-----
gi1 |enabled
gi2 |enabled
```

This example shows how to show current port status

```
Switch# show interfaces gi1 status
Port Name Status Vlan Duplex Speed Type
gi1 connected 1 full a-100M Copper
```



## 4.21 QoS

### 4.21.1 qos

**Command:**

```
qos basic
```

```
no qos
```

**Parameter:**

**basic** Specify the device to qos basic mode

**Mode:**

Global Configuration

**Usage Guide:**

QoS have following 2 modes, use this command is able to switch between them.

**Disable:**

QoS function is disabled and all packets will go through lowest priority queue. It means first in will be first out, no QoS is guarantee.

**Basic:**

According to basic trust type to assign queue for packets, and packets with higher priority are able to send first.

**Example:**

This example shows how to change qos to basic mode.

```
Switch(config)# qos basic
```

This example shows how to change qos to disabled mode.

```
Switch(config)# no qos
```

This example shows how to check current qos mode

```
Switch# show qos
QoS Mode: basic
```

```
Basic trust: cos
```

## 4.21.2 qos trust

### Command:

```
qos trust (cos | cos-dscp | dscp | precedence)
```

### Parameter:

|                   |                                                                                    |
|-------------------|------------------------------------------------------------------------------------|
| <b>cos</b>        | Specify the device to trust CoS                                                    |
| <b>cos-dscp</b>   | Specify the device to trust DSCP for IP packets, and trust CoS for non-IP packets. |
| <b>dscp</b>       | Specify the device to trust DSCP                                                   |
| <b>precedence</b> | Specify the device to trust IP Precedence                                          |

### Default:

Default qos basic mode trust type is cos.

### Mode:

Global Configuration

### Usage Guide:

In QoS basic mode, there are 4 trust types for device to judge the appropriate queue of the packets. This command is able to switch between these trust types.

#### CoS:

IEEE 802.1p defined 3bits priority value in vlan tag. Trust this value in packets and assign queue according to cos-queue map.

#### DSCP:

IETF RFC2474 defined 6bits priority value in IP packet (highest 6bits in ToS field). Trust this value in packets and assign queue according to dscp-queue map.

#### IP Precedence:

The highest 3bits priority value in IP packet ToS field. Trust this value in packets and assign queue according to precedence-queue map.

#### CoS-DSCP:

Trust DSCP for IP packets and assign queue according to dscp-queue map. Trust CoS for non-IP packets and assign

queue according to cos-queue map.

**Example:**

This example shows how to change qos basic mode trust types.

```
Switch(config)# qos trust cos
Switch(config)# qos trust cos-dscp
Switch(config)# qos trust dscp
Switch(config)# qos trust precedence
```

This example shows how to check current qos trust type.

```
Switch# show qos
QoS Mode: basic
Basic trust: cos
```

## 4.21.3 qos map

**Command:**

```
qos map (cos-queue | dscp-queue | precedence-queue) SEQUENCE to <1-8>

qos map (queue-cos | queue-precedence) SEQUENCE to <0-7>

qos map queue-dscp SEQUENCE to <0-63>
```

**Parameter:**

- cos-queue**            Configure or show CoS to queue map
- dscp-queue**        Configure or show DSCP to queue map
- precedence-queue**   Configure or show IP Precedence to queue map.
- queue-cos**            Configure or show queue to CoS map
- queue-dscp**         Configure or show queue to DSCP map
- queue-precedence**    Configure or show queue to IP Precedence map
- SEQUENCE**            Specify the cos, dscp, precedence or queue with one or multiple values.
- <1-8>**                Specify th queue id
- <0-7>**                Specify the cos or precedence values
- <0-63>**              Specify the dscp values

**Default:**

The default values of cos-queue are showing in the following table.

| CoS | Queue ID |
|-----|----------|
| 0   | 2        |
| 1   | 1        |
| 2   | 3        |
| 3   | 4        |
| 4   | 5        |
| 5   | 6        |
| 6   | 7        |
| 7   | 8        |

The default values of dscp-queue are showing in the following table.

| DSCP  | Queue ID |
|-------|----------|
| 0~7   | 1        |
| 8~15  | 2        |
| 16~23 | 3        |
| 24~31 | 4        |
| 32~39 | 5        |
| 40~47 | 6        |
| 48~55 | 7        |
| 56~63 | 8        |

The default values of ip precedence are showing in the following table.

| IP Precedence | Queue ID |
|---------------|----------|
| 0             | 1        |
| 1             | 2        |
| 2             | 3        |
| 3             | 4        |
| 4             | 5        |
| 5             | 6        |
| 6             | 7        |
| 7             | 8        |

The default values of queue-cos are showing in the following table.

| Queue ID | CoS |
|----------|-----|
|----------|-----|

|   |   |
|---|---|
| 1 | 1 |
| 2 | 0 |
| 3 | 2 |
| 4 | 3 |
| 5 | 4 |
| 6 | 5 |
| 7 | 6 |
| 8 | 7 |

The default values of queue-dscp are showing in the following table.

| Queue ID | DSCP |
|----------|------|
| 1        | 0    |
| 2        | 8    |
| 3        | 16   |
| 4        | 24   |
| 5        | 32   |
| 6        | 40   |
| 7        | 48   |
| 8        | 56   |

The default values of queue-precedence are showing in the following table.

| Queue ID | DSCP |
|----------|------|
| 1        | 0    |
| 2        | 1    |
| 3        | 2    |
| 4        | 3    |
| 5        | 4    |
| 6        | 5    |
| 7        | 6    |
| 8        | 7    |

**Mode:**

Global Configuration

**Usage Guide:**

According to different trust type, packets will be assigned to different queue based on the specific qos map. For example, if the trust type is trust cos, the device will get the cos value in packet and reference the cos-queue mapping to assign the correct queue.

The queue to cos, dscp or precedence maps are used by remarking function. If the port remarking feature is enabled,

the remarking function will reference these 3 tables to remark packets.

**Example:**

This example shows how to map cos 6 and 7 to queue 1.

```
Switch(config)# qos map cos-queue 6 7 to 1
Switch# show qos map cos-queue
CoS to Queue mappings
COS 0 1 2 3 4 5 6 7

Queue 2 1 3 4 5 6 1 1
```

This example shows how to map queue 4 and 5 to cos 7.

```
Switch(config)# qos map queue-cos 4 5 to 7
Switch# show qos map queue-cos
Queue to CoS mappings
Queue 1 2 3 4 5 6 7 8

CoS 1 0 2 7 7 5 6 7
```

## 4.21.4 qos queue

**Command:**

```
qos queue strict-priority-num <0-8>

qos queue weight SEQUENCE

show qos queueing
```

**Parameter:**

**strict-priority-num** Specify the strict priority queue number  
 <0-8>

**weight SEQUENCE** Specify the non-strict priority queue weight value. The valid queue weight value is from  
 1 to 127.

**Default:**

Default strict priority queue number is 8, it means all queues are strict priority queue.

The default queue weight for each queue is shown in following table.

| Queue ID | Queue Weight |
|----------|--------------|
| 1        | 1            |
| 2        | 2            |
| 3        | 3            |
| 4        | 4            |
| 5        | 5            |
| 6        | 9            |
| 7        | 13           |
| 8        | 15           |

**Mode:**

Global Configuration

**Usage Guide:**

The device support total 8 queues for QoS queueing. It is able to set the queue to be strict priority queue or weighted queue to prevent starvation. The queue with higher id value has higher priority.

First, you need to decide how many strict priority queue you need. The strict priority queue will always occupy the higher priority queue. For example, if you specify the strict priority number to be 2, then the queue 7 and 8 will be the strict priority queues and the others are weighted queues.

After you setup the number of strict priority queue, you need to setup the weight for the weighted queues by using “qos queue weight” command. And the bandwidth will shared by the weight you configured between these weighted queues.

**Example:**

This example shows how to setup device with 3 strict priority queues and give other weighted queues with weight 5, 10, 15, 20, 25.

```
Switch(config)# qos queue strict-priority-num 3
Switch(config)# qos queue weight 5 10 15 20 25
Switch# show qos queueing
qid-weights Ef - Priority
1 - 5 dis- N/A
2 - 10 dis- N/A
3 - 15 dis- N/A
4 - 20 dis- N/A
5 - 25 dis- N/A
6 - N/A ena- 6
```

```
7 - N/A ena- 7
```

```
8 - N/A ena- 8
```

## 4.21.5 qos cos

### Command:

```
qos cos <0-7>
```

### Parameter:

**cos <0-7>** Specify the CoS value for the interface.

### Default:

Default CoS value for interface is 0.

### Mode:

Interface Configuration

### Usage Guide:

Sometimes, there is no qos information in the packets, such as CoS, DSCP, IP Precedence. But we still can give the priority for packets by configuring the interface default cos value. If there is no qos information in the packets, the device will use this default cos value and find the cos-queue map to get the final destination queue.

Use “**qos cos**” command to assign port default cos value.

### Example:

This example shows how to configure default cos value 7 on interface gi1.

```
Switch(config)# interface GigabitEthernet 1
Switch(config-if)# qos cos 7
Switch(config-if)# end
Switch# show qos interface GigabitEthernet 1
Port | CoS | Trust State | Remark Cos | Remark DSCP | Remark IP Prec
-----+-----+-----+-----+-----+-----
gi1 | 7 | enabled | disabled | disabled | disabled |
```

## 4.21.6 qos trust



**Command:**

```

qos trust

no qos trust

```

**Default:**

Default interface qos trust state is enabled.

**Mode:**

Interface Configuration

**Usage Guide:**

After QoS function is enabled in basic mode, the device also support per interface enable/disable the qos function. If the trust state on interface is enabled, all ingress packets of this interface will remap according to the trust type and the qos maps. Otherwise, all ingress packets will assign to queue 1.

Use “**qos trust**” to enable trust state on interface and use “**no qos trust**” to disable trust state on interface.

**Example:**

This example shows how to disable qos trust state on interface gi1.

```

Switch(config)# interface GigabitEthernet 1
Switch(config-if)# no qos trust
Switch(config-if)# end

Switch# show qos interface GigabitEthernet 1
Port | CoS | Trust State | Remark Cos | Remark DSCP | Remark IP Prec
-----+-----+-----+-----+-----+-----
gi1 | 0 | disabled | disabled | disabled | disabled |

```

## 4.21.7 qos remark

**Command:**

```

qos remark (cos | dscp | precedence)

no qos remark (cos | dscp | precedence)

```

**Parameter:**

- cos**                      Enable/Disable cos remarking.
- dscp**                    Enable/Disable dscp remarking.

**precedence** Enable/Disable precedence remarking.

**Default:**

- Default CoS remarking is disabled.
- Default DSCP remarking is disabled.
- Default IP Precedence remarking is disabled.

**Mode:**

Interface Configuration

**Usage Guide:**

QoS remarking feature allow you to change priority information in packets based on egress queue. For example, you want all packets egress from interface fa1 queue 1 to remark the cos value to be 5 for next tier of device, you can enable the cos remarking feature on fa1 and configure the queue-cos map for queue 1 map to cos 5.

Use “**qos remark**” command to enable remarking feature on specific type. And use “**no qos remark**” command to disable it.

**Example:**

This example shows how to enable remarking features on interface gi1.

```
Switch(config)# interface GigabitEthernet 1
Switch(config-if)# qos remark cos
Switch(config-if)# qos remark dscp
Switch(config-if)# qos remark precedence
Switch(config-if)# end
Switch# show qos interface GigabitEthernet 1
Port | CoS | Trust State | Remark Cos | Remark DSCP | Remark IP Prec
-----+-----+-----+-----+-----+-----
gi1 | 0 | enabled | enabled | enabled | enabled
```

## 4.21.8 show qos

**Command:**

```
show qos
```

**Mode:**

Privileged EXEC

**Usage Guide:**

Use “**show qos**” command to show qoe mode and trust type.

**Example:**

This example shows how to check current qos mode.

```
Switch# show qos
QoS Mode: basic
Basic trust: cos
```

## 4.21.9 show qos map

**Command:**

```
show qos map [(cos-queue | dscp-queue | precedence-queue | queue-cos |
queue-dscp | queue-precedence)]
```

**Parameter:**

- cos-queue**            Show CoS to queue map.
- dscp-queue**        Show DSCP to queue map
- precedence-queue** Show IP Precedence to queue map.
- queue-cos**         Show queue to CoS map.
- queue-dscp**        Show queue to DSCP map.
- queue-precedence** Show queue to IP Precedence map.

**Mode:**

Privileged EXEC

**Usage Guide:**

Use “**show qos map**” command to show all kinds of mapping for qos remapping and remarking features.

**Example:**

This example shows how to show all qos maps.

```
Switch(config)# show qos map
CoS to Queue mappings
COS 0 1 2 3 4 5 6 7

Queue 2 1 3 4 5 6 7 8
DSCP to Queue mappings
```

```

d1: d2 0 1 2 3 4 5 6 7 8 9

0: 1 1 1 1 1 1 1 1 2 2
1: 2 2 2 2 2 2 3 3 3 3
2: 3 3 3 3 4 4 4 4 4 4
3: 4 4 5 5 5 5 5 5 5 5
4: 6 6 6 6 6 6 6 7 7
5: 7 7 7 7 7 8 8 8 8
6: 8 8 8 8
IP Precedence to Queue mappings
IP Precedence 0 1 2 3 4 5 6 7

Queue 1 2 3 4 5 6 7 8
Queue to CoS mappings
Queue 1 2 3 4 5 6 7 8

CoS 1 0 2 3 4 5 6 7
Queue to DSCP mappings
Queue 1 2 3 4 5 6 7 8

DSCP 0 8 16 24 32 40 48 56
Queue to IP Precedence mappings
Queue 1 2 3 4 5 6 7 8

ipprec 0 1 2 3 4 5 6 7

```

## 4.21.10 show qos interface

Command:

```
show qos interface IF_PORTS
```

Parameter:

***IF\_PORTS***            Select port to show qos configurations.

Mode:

Privileged EXEC

**Usage Guide:**

Use “**show qos interfaces**” command to show port default cos ,remarking state and remarking type state informations.

**Example:**

This example shows how to show qos configurations on interface gi1.

```
Switch# show qos interface GigabitEthernet 1
Port | CoS | Trust State | Remark Cos | Remark DSCP | Remark IP Prec
-----+-----+-----+-----+-----+-----
gi1 | 7 | enabled | disabled | disabled | disabled |
```

## 4.22 Rate Limit

### 4.22.1 rate limit

#### Command:

```

rate-limit ingress burst <1-65535>

no rate-limit ingress burst

rate-limit egress burst <4578-50000>

rate-limit egress queue burst <1-8> <1-65535>

no rate-limit egress burst [<1-8>]

```

#### Parameter:

**burst** Specify the maximum permitted excess burst size (CBS) in bytes

**<1-8>** Specify the egress shaper queue number

#### Default:

Rate limiting is disabled.

#### Mode:

Global Configuration

#### Usage Guide:

Use the **rate-limit ingress burst** Global Configuration mode command to limit the incoming traffic rate for all ports.

Use the no form of this command to disable the rate limit

Use the **rate-limit egress burst** Global Configuration mode command to configure the egress ports or queue shaper.

Use the no form of this command to disable the shaper

You can verify your setting by entering the **show running-config** Privileged EXEC command

#### Example:

The following example show how to configure ingress port rate limit and egress port & queue shaper.

```

Switch(config)# rate-limit ingress burst 5000
Switch(config)# rate-limit egress burst 6000
Switch(config)# rate-limit egress queue burst 7000
Switch# show running-config
rate-limit ingress burst 5000

```

```
rate-limit egress burst 6000
rate-limit egress queue burst 7000
```

## 4.22.2 rate limit (interface)

### Command:

```
rate-limit ingress <0-1000000>

no rate-limit ingress

rate-limit egress <0-1000000>

rate-limit egress queue <1-8> <0-1000000>

no rate-limit egress [<1-8>]
```

### Parameter:

**Cir** Specify the maximum number of kilobits per second of ingress traffic on a port. The range is 100 –max port speed.

**<1-8>** Specify the egress shaper queue number

### Mode:

Interface Configuration

### Usage Guide:

Use the **rate-limit ingress** Interface Configuration mode command to limit the incoming traffic rate on a port. Use the no form of this command to disable the rate limit

Use the **rate-limit egress** Interface Configuration mode command to configure the egress port or queue shaper. Use the no form of this command to disable the shaper

You can verify your setting by entering the **show running-config** interfaces Privileged EXEC command

### Example:

The following example show how to configure ingress port rate limit and egress port & queue shaper.

```
Switch(config)# interfaces gi7
Switch(config-if)# rate-limit ingress 128
Switch(config-if)# rate-limit egress 2048
```

```
Switch(config-if)# rate-limit egress queue 1 512
Switch# show running-config interfaces gi7
interface gi7
rate-limit ingress 128
rate-limit egress 2048 165
rate-limit egress queue 1 512
```



## 4.23 RMON

### 4.23.1 Rmon event

**Command:**

```
rmon event <1-65535> [log] [trap COMMUNITY] [description DESCRIPTION] [owner
NAME]

no rmon event <1-65535>
```

**Parameter:**

**<1-65535>** Specify event index to create or modify

**[log]** (Optional)Specify to show syslog.

**[trap COMMUNITY]** (Optional)Specify SNMP community to show SNMP trap.

**[description DESCRIPTION]** (Optional)Specify description of event

**[owner NAME]** (Optional)Specify owner of event.

**Mode:**

Global Configuration

**Usage Guide:**

Use the **rmon alarm** command to add or modify a RMON alarm entry. Use the **no** form of this command to delete.

**Example:**

The example shows how to add RMON event entry with log and trap action and then modify it action to log only. You can verify settings by the following **show rmon event** command.

```
switch(config)# rmon event 1 log trap public description test owner admin
switch(config)# show rmon event 1
Rmon Event Index : 1
Rmon Event Type : Log and Trap
Rmon Event Community : public
Rmon Event Description : test
Rmon Event Last Sent :
Rmon Event Owner : admin
switch(config)# rmon event 1 log description test owner admin
switch(config)# show rmon event 1
Rmon Event Index : 1
```

```
Rmon Event Type : Log
Rmon Event Community : public
Rmon Event Description : test
Rmon Event Last Sent :
Rmon Event Owner : admin
```

## 4.23.2 Rmon alarm

### Command:

```
rmon alarm <1-65535> interface IF_PORT (drop-events|octets|pkts|broadcast-pkts|
multicast-pkts|crc-align-errors|undersize-pkts|oversize-pkts|fragments|jabbers|collisions
|pkts64octets|pkts65to127octets|pkts128to255octets|pkts256to511octets|pkts512to1023octets
|pkts1024to1518octets) <1-2147483647> (absolute|delta) rising <0-2147483647> <0-65535>
falling <0-2147483647> <0-65535> startup (rising|rising-falling|falling) [owner NAME]

no rmon alarm <1-65535>
```

### Parameter:

|                                                                                                                                                                                                                                                                                                           |                                                                      |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|
| <1-65535>                                                                                                                                                                                                                                                                                                 | Specify alarm index to create or modify                              |
| IF_PORT                                                                                                                                                                                                                                                                                                   | Specify the interface to sample                                      |
| (drop-events octets<br> pkts broadcast-pkts<br>s <br>multicast-pkts crc-<br>align-errors unders<br>ize-pkts oversize-p<br>kts fragments jabb<br>ers collisions<br> pkts64octets pkts6<br>5to127octets pkts1<br>28to255octets pkts<br>256to511octets pkt<br>s512to1023octets<br> pkts1024to1518oct<br>ets) | Specify a mib object to sample                                       |
| <1-2147483647>                                                                                                                                                                                                                                                                                            | Specify the time in seconds that the alarm monitors the MIB variable |

|                                             |                                                                                                                  |
|---------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <b>(absolute delta)</b>                     | Specify absolute to compare sample counter absolutely.<br>Specify delta to compare delta counter between samples |
| <b>&lt;0-2147483647&gt;</b>                 | Specify a number which the alarm trigger rising event                                                            |
| <b>&lt;0-65535&gt;</b>                      | Specify event index when the rising threshold exceeds.                                                           |
| <b>&lt;0-2147483647&gt;</b>                 | Specify a number which the alarm trigger falling event                                                           |
| <b>&lt;0-65535&gt;</b>                      | Specify event index when the falling threshold exceeds.                                                          |
| <b>(rising rising-falling<br/> falling)</b> | Specify only to how rising or falling startup event. Or show either rising or falling startup event.             |
| <b>[owner NAME]</b>                         | (Optional) Specify owner of alarm.                                                                               |

**Mode:**

Global Configuration

**Usage Guide:**

Use the **rmon event** command to add or modify a RMON event entry. Before add alarm entry, at least one event entry must be added. Use the **no** form of this command to delete.

**Example:**

The example shows how to add RMON alarm entry that sample interface fa1 packets delta count every 300 seconds. Trigger event index 1 if over than rising threshold 10000, trigger event index 2 if lower than falling threshold. You can verify settings by the following **show rmon alarm** command.

```

switch(config)# rmon event 1 log
switch(config)# rmon event 2 log
switch(config)# show rmon event all
Rmon Event Index : 1
Rmon Event Type : Log
Rmon Event Community :
Rmon Event Description :
Rmon Event Last Sent :
Rmon Event Owner :
Rmon Event Index : 2
Rmon Event Type : Log
Rmon Event Community :
Rmon Event Description :
Rmon Event Last Sent :
Rmon Event Owner :
Switch(config)# rmon alarm 1 interface gi1 pkts 300 delta rising 10000 1 falling 100 1
startup rising-falling owner admin
Rmon Alarm Index : 1

```

```
Rmon Alarm Sample Interval : 300
Rmon Alarm Sample Interface : gi1
Rmon Alarm Sample Variable : Pkts
Rmon Alarm Sample Type : delta
Rmon Alarm Type : Rising or Falling
Rmon Alarm Rising Threshold : 10000
Rmon Alarm Rising Event : 1
Rmon Alarm Falling Threshold : 100
Rmon Alarm Falling Event : 1
Rmon Alarm Owner : admin
```

### 4.23.3 rmon history

**Command:**

```
rmon history <1-65535> interface IF_PORT [buckets <1-65535>] [interval <1-3600>]
[owner NAME]

no rmon history <1-65535>
```

**Parameter:**

|                                  |                                                   |
|----------------------------------|---------------------------------------------------|
| <b>&lt;1-65535&gt;</b>           | Specify history index to create or modify.        |
| <b>IF_PORT</b>                   | Specify the interface to sample                   |
| <b>[bucket &lt;1-65535&gt;]</b>  | (Optional) Specify the maximum number of buckets. |
| <b>[interval &lt;1-3600&gt;]</b> | (Optional) Specify time interval for each sample  |
| <b>[owner NAME]</b>              | (Optional)Specify owner of history                |

**Mode:**

Global Configuration

**Usage Guide:**

Use the **rmon history** command to add or modify a RMON history entry. Use the **no** form of this command to delete

**Example:**

The example shows how to add RMON history entry that monitor interface gi1 every 60 seconds and then modify it to monitor every 30 seconds. You can verify settings by the following **show rmon history** command.

```

switch(config)# rmon history 1 interface gi1 interval 60 owner admin
switch(config)# show rmon history 1
Rmon History Index : 1
Rmon Collection Interface: gi1
Rmon History Bucket : 50
Rmon history Interval : 60
Rmon History Owner : admin
switch(config)# rmon history 1 interface gi1 interval 30 owner admin
switch(config)# show rmon history 1
Rmon History Index : 1
Rmon Collection Interface: gi1
Rmon History Bucket : 50
Rmon history Interval : 30
Rmon History Owner : admin

```

## 4.23.4 clear rmon interfaces statistics

**Command:**

```
clear rmon interfaces IF_PORTS statistics
```

**Parameter:**

**IF\_PORTS** specifies ports to clear

**Mode:**

Global Configuration

**Usage Guide:**

Use the **clear rmon interfaces statistics** command to clear RMON etherStat statistics those are recorded on interface.

**Example:**

The example shows how to clear RMON etherStat statistics on interface gi1. You can verify settings by the following **show rmon interface statistics** command.

```

switch# clear rmon interfaces gi1 statistics
switch# show rmon interfaces gi1 statistics
==== Port gi1 =====

```

```

etherStatsDropEvents : 0
etherStatsOctets : 0
etherStatsPkts : 0
etherStatsBroadcastPkts : 0
etherStatsMulticastPkts : 0
etherStatsCRCAAlignErrors : 0
etherStatsUnderSizePkts : 0
etherStatsOverSizePkts : 0
etherStatsFragments : 0
etherStatsJabbers : 0
etherStatsCollisions : 0
etherStatsPkts64Octets : 0
etherStatsPkts65to127Octets : 0
etherStatsPkts128to255Octets : 0
etherStatsPkts256to511Octets : 0
etherStatsPkts512to1023Octets : 0
etherStatsPkts1024to1518Octets : 0

```

## 4.23.5 show rmon event

### Command:

```
show rmon event (<1-65535> | all)
```

### Parameter:

|                        |                               |
|------------------------|-------------------------------|
| <b>&lt;1-65535&gt;</b> | specifies event index to show |
| <b>all</b>             | Show all existed event        |

### Mode:

Global Configuration

### Usage Guide:

Use the **show rmon event** command to show existed RMON event entry.

### Example:

The example shows how to show rmon event entry.

```
switch(config)# rmon event 1 log trap public description test owner admin
switch(config)# show rmon event 1
Rmon Event Index : 1
Rmon Event Type : Log and Trap
Rmon Event Community : public
Rmon Event Description : test
Rmon Event Last Sent :
Rmon Event Owner : admin
```

## 4.23.6 show rmon event log

**Command:**

```
show rmon event <1-65535> log
```

**Parameter:**

**<1-65535>** specifies event index to show event log

**Mode:**

Global Configuration

**Usage Guide:**

Use the **show rmon event log** command to show log triggered by RMON alarm.

**Example:**

The example shows how to show rmon event log.

```
switch(config)# show rmon event 1 log
=====
Index : 1
Alarm Index : 1
Action : Startup Falling
Time : (32918334) 3 days, 19:26:23.34
Description : gi1.Pkts=0 <= 100
```

## 4.23.7 show rmon alarm

**Command:**

```
show rmon alarm (<1-65535> | all)
```

**Parameter:**

<1-65535> specifies alarm index to show  
 all Show all existed alarm

**Mode:**

Global Configuration

**Usage Guide:**

Use the **show rmon alarm** command to show existed RMON alarm entry.

**Example:**

The example shows how to show rmon alarm entry.

```
Switch(config)# rmon alarm 1 interface gi1 pkts 300 delta rising 10000 1 falling 100 1
startup rising-falling owner admin
Rmon Alarm Index : 1
Rmon Alarm Sample Interval : 300
Rmon Alarm Sample Interface : gi1
Rmon Alarm Sample Variable : Pkts
Rmon Alarm Sample Type : delta
Rmon Alarm Type : Rising or Falling
Rmon Alarm Rising Threshold : 10000
Rmon Alarm Rising Event : 1
Rmon Alarm Falling Threshold : 100
Rmon Alarm Falling Event : 1
Rmon Alarm Owner : admin
```

## 4.23.8 show rmon history

**Command:**

```
show rmon history (<1-65535> | all)
```

**Parameter:**

<1-65535> specifies history index to show



**all** Show all existed history

**Mode:**

Global Configuration

**Usage Guide:**

Use the **show rmon history** command to show existed RMON history entry

**Example:**

The example shows how to show RMON history entry.

```
switch(config)# rmon history 1 interface gi1 interval 30 owner admin
switch(config)# show rmon history 1
Rmon History Index : 1
Rmon Collection Interface: gi1
Rmon History Bucket : 50
Rmon history Interval : 30
Rmon History Owner : admin
```

## 4.23.9 show rmon history statistics

**Command:**

```
show rmon history <1-65535> statistic
```

**Parameter:**

**<1-65535>** specifies history index to show history statistic

**Mode:**

Global Configuration

**Usage Guide:**

Use the **show rmon history statistic** command to show statistics that are recorded by RMON history..

**Example:**

The example shows how to show RMON history statistics

```
switch(config)# show rmon history 1 statistics
=====
Sample Index : 2
```

Interval Start : (32940466) 3 days, 19:30:04.66

DropEvents : 0

Octets : 117226

Pkts : 763

BroadcastPkts : 9

MulticastPkts : 0

CRCAAlignErrors : 0

UnderSizePkts : 0

OverSizePkts : 0

Fragments : 0

Jabbers : 0

Collisions : 0

Utilization : 1

=====

Sample Index : 1

Interval Start : (32939462) 3 days, 19:29:54.62

DropEvents : 0

Octets : 220

Pkts : 3

BroadcastPkts : 1

MulticastPkts : 0

CRCAAlignErrors : 0

UnderSizePkts : 0

OverSizePkts : 0

Fragments : 0

Jabbers : 0

Collisions : 0

Utilization : 0

## 4.24 SNMP

### 4.24.1 snmp

**Command:**

```
snmp

no snmp
```

**Mode:**

Global Configuration

**Usage Guide:**

'no snmp' will disable snmp.

'snmp' will enable snmp.

The configure can use show snmp

**Example:**

The following example specifies that set global snmp test

```
Switch(config)# snmp
Switch# show snmp
SNMP is enabled
```

### 4.24.2 snmp trap

**Command:**

```
[no] snmp trap (auth|linkUpDown|warm-start|cold-start|port-security)
```

**Default:**

```
snmp trap auth
snmp trap linkUpDown
snmp trap warm-start
snmp trap cold-start
snmp trap port-security
```

**Mode:**

Global Configuration

**Usage Guide:**

- 'no snmp trap auth' snmp will not send auth failure trap.
  - 'no snmp trap linkUpDown' snmp will not send linkup and link down trap.
  - 'no snmp trap warm-start snmp will not send warm start trap.
  - 'no snmp trap cold-start' snmp will not send cold start trap.
  - 'no snmp trap port-security' snmp will not send port-security trap.
- The configure can use show snmp trap.

**Example:**

The following example specifies that set trap auth disable test.

```
Switch(config)#no snmp auth
Switch# show snmp trap
SNMP auth failed trap : Disable
SNMP linkUpDown trap : Enable
SNMP warm-start trap : Enable
SNMP cold-start trap : Enable
SNMP port security trap: Enable
```

### 4.24.3 snmp view

**Command:**

```
snmp view NAME subtree OID oid-mask (all | MASK) viewtype (included | excluded)

no snmp view NAME subtree (all |OID)
```

**Parameter:**

|                              |                                                       |
|------------------------------|-------------------------------------------------------|
| <b>NAME</b>                  | View Name                                             |
| <b>OID</b>                   | View subtree OID                                      |
| <b>(all   MASK)</b>          | View subtree OID mask.<br>All: all mask bit is '1'    |
| <b>(included   excluded)</b> | View subtree is accessed or not allowed accesse       |
| <b>(all  OID)</b>            | Delete the View name all subtree OID or specifies OID |

**Default:**

Default View is "all" and subtree is .1 the type is include.

**Mode:**

Global Configuration

**Usage Guide:**

The default view can't delete and create by user

The min view is sysUpTime.

The exclude view must in range of include view,otherwise, it is not invalid.

The configure use 'show snmp view' to check

**Example:**

The following example specifies that set view systemView test.

```
Switch(config)# snmp view systemView subtree 1.3.6.1.2.1.1 oid-mask all viewtype
included
Switch# show snmp view
View Name Subtree OID OID Mask View Type

all .1 all included
systemView .1.3.6.1.2.1.1 all included
```

## 4.24.4 snmp access group

**Command:**

```
snmp group NAME version (1 |2c |3) (noauth | auth | priv) read-view NAME write-view
NAME [notify-view NAME]

no snmp group NAME security-mode version (1 |2c |3)
```

**Parameter:**

|                               |                                                              |
|-------------------------------|--------------------------------------------------------------|
| <b>NAME</b>                   | Access group name                                            |
| <b>(1  2c  3)</b>             | Access model for snmp v1/v2c/v3                              |
| <b>(noauth   auth   priv)</b> | Noauth for snmp v1/v2c/v3<br>Auth and priv group for snmp v3 |
| <b>read-view NAME</b>         | Access group specifies read view                             |
| <b>write-view NAME</b>        | Access group specifies write view                            |
| <b>notify-view NAME</b>       | Access group specifies notify view                           |

**Mode:**

Global Configuration

**Usage Guide:**

The group version 1 and 2c only for snmp community use. And version 3 group only for snmp user use.

When group version is 1 or 2c , can only use noauth

The read/write/notify view must exist.

The configure use 'show snmp group' to check

**Example:**

The following example specifies that set snmp group test.

```
Switch(config)#snmp group group1 version 1 noauth read-view all write-viw ""
Switch(config)#snmp group group2 version 2c noauth read-view all write-view all
Switch(config)# snmp group group3 version 3 auth read-view all write-view all
Switch# show snmp group
Group Name Model Level ReadView WriteView NotifyView

group1 v1 noauth all --- ---
group2 v2c noauth all all ---
group3 v3 auth all all ---
```

## 4.24.5 snmp community

**Command:**

```
snmp community NAME [view NAME] (ro|rw)

snmp community NAME group NAME

no snmp community NAME
```

**Parameter:**

- community NAME** Snmp v1/v2 community name
- group NAME** Snmp community specifies access group name for advance mode
- [view NAME]** Snmp community specifies view for basic mode
- (ro|rw)** Snmp community read or readwrite attribute for basic mode

**Mode:**

Global Configuration

**Usage Guide:**

The community support basic & advace mode.

Basic: community assigned view and read/write right.

Advace: community assigned access group.

The community specifies the group witch must exist.

The community specifies the view witch must exist. It will generate the no exist v1 or v2 access group for community.

The configure can use 'show snmp community' to check

**Example:**

The following example specifies that configure community test.

```
Switch(config)# snmp communit public rw
Switch(config)# snmp communit test1 view all ro
Switch(config)# snmp group group2 version 2c noauth read-view all write-view ""
Switch(config)# snmp community test2 group group2
Switch# show snmp comunity
Community Name Group Name View
Access

public all rw
test2 group2
test1 all ro
```

## 4.24.6 snmp user

**Command:**

```
snmp user USERNAME GROUPNAME [auth (md5|sha) AUTHPASSWD]

snmp user USERNAME GROUPNAME auth (md5|sha) AUTHPASSWD priv
PRIVPASSWD

no snmp user NAME
```

**Parameter:**

- USERNAME** Snmp user name
- GROUPNAME** Snmp user specifies group
- [auth (md5|sha)]** Snmp user auth protocol

**AUTHPASSWD** Snmp user auth password  
**PRIVPASSWD** Snmp user priv password

**Mode:**

Global Configuration

**Usage Guide:**

The group version must be v3 , and the security level must match the snmp user configure.

AUTHPASSWD and PRIVPASSWD min length is 8.max length is 32 and 64

The configure can use 'show snmp user' to check

**Example:**

The following example specifies that set auth snmp user test.

```
Switch(config)# snmp group group3 version 3 auth read-view all write-view all
Switch(config)# snmp user user1 group3 auth md5 12345678
Switch# show snmp user
Username: user1
Password: *****
Privilege Mode: rw
Access GroupName: group3
Authentication Protocol: md5
Encryption Protocol: none
Access SecLevel: auth
```

## 4.24.7 snmp engineID

**Command:**

```
snmp engineid (default | ENGINEID)

snmp engineid remote (A.B.C.D|X::X:X) ENGINEID

no snmp engineid remote (A.B.C.D|X::X:X)
```

**Parameter:**

**(default |** Default is MAC address.  
**ENGINEID)** ENGINEID is 10~64 hex characters  
**(A.B.C.D|X::X:X)** Host ipv4/ipv6 address



**Mode:**

Global Configuration

**Usage Guide:**

Default engineid is DUT MAC address.

The configure can use 'show snmp engineid'

**Example:**

The following example specifies that set remote engine id test.

```
Switch(config)# snmp engineid remote 192.168.1.100 112233445566
Switch# show snmp engineid
Local SNMPV3 Engine id: DEADBEEF0114
IP address Remote SNMP engineID

192.168.1.100 112233445566
```

## 4.24.8 snmp host

**Command:**

```
snmp host (A.B.C.D|X::X:X|HOSTNAME) [(traps | informs)] [version (1|2c)] NAME
[udp-port <1-65535>] [timeout <1-300>] [retries <1-255>]

snmp host (A.B.C.D|X::X:X|HOSTNAME) [(traps | informs)] version 3 [(auth |
noauth | priv)] NAME [udp-port <1-65535>] [timeout <1-300>] [retries <1-255>]

no snmp host (A.B.C.D|X::X:X|HOSTNAME) [(traps | informs)] [version (1|2c|3)]
```

**Parameter:**

- (A.B.C.D|X::X:X|H OSTNAME) Snmp trap host ipv4/ipv6 address or host name
- [(traps | informs)] Snmp notification type is traps or informs
- [version (1|2c|3)] V1/v2c/v3 traps
- [(auth | noauth | priv)] V3 trap for auth/noauth/priv
- NAME Snmp community name or user name
- [udp-port] The manage receive trap udp port num

<1-65535>]

[timeout <1-300>] The notify type is inform timeout value

[retries <1-255>] The notify type is inform retries

**Mode:**

Global Configuration

**Usage Guide:**

This command can't configure version 1 inform

When use traps, this command can't configure udp-port and retries.

The host use NAME witch is snmp community or user NAME must exist.

The host use host security level must match the snmp user security level

The configure can use 'show snmp host' to check

**Example:**

The following example specifies that snmp community configure test.

```
Switch(config)# snmp community public ro
Switch(config)# snmp community private rw
Switch(config)# snmp group group3 version 3 auth read-view all write-view all
Switch(config)# snmp user user1 group3 auth md5 12345678
Switch(config)# snmp host 192.168.1.100 version 2c public
Switch(config)# snmp host 192.168.1.100 informs version 2c private
Switch(config)# snmp host 192.168.1.100 version 3 auth user1
Switch# show snmp host
Server Community Name Notification Version Notification Type UDP Port Retries Timeout

192.168.1.100 public v2c trap 162 -- --
192.168.1.100 private v2c inform 200 3 10
192.168.1.100 user1 v3 trap 162 -- --
```

## 4.24.9 show snmp

**Command:**

```
show snmp
```

**Mode:**

privileged mode

**Usage Guide:**

This command will snmp status.

**Example:**

The following example specifies that show snmp test

```
Switch# show snmp
```

## 4.24.10 show snmp trap

**Command:**

```
show snmp trap
```

**Mode:**

privileged mode

**Usage Guide:**

This command will display snmp trap class auth/linkupdown/cold-start/warm-start/port-security/. Status.

**Example:**

The following example specifies that display snmp trap test

```
Switch# show snmp trap
```

## 4.24.11 show snmp view

**Command:**

```
show snmp view
```

**Mode:**

privileged mode

**Usage Guide:**

This command will display the snmp view entry.

**Example:**

The following example specifies that display snmp view test.

```
Switch# show snmp view
```

## 4.24.12 show snmp group

**Command:**

```
show snmp group
```

**Mode:**

privileged mode

**Usage Guide:**

This command will display the snmp group

**Example:**

The following example specifies that display snmp group test.

```
Switch# show snmp group
```

## 4.24.13 show snmp community

**Command:**

```
show snmp community
```

**Mode:**

privileged mode

**Usage Guide:**

This command will display the snmp community entry.

**Example:**

The following example specifies that display snmp community test

```
Switch# show snmp community
```

## 4.24.14 show snmp host

**Command:**

```
show snmp host
```

**Mode:**

privileged mode

**Usage Guide:**

This command will display the snmp host entry.

**Example:**

The following example specifies that display snmp host test.

```
Switch# show snmp host
```

## 4.24.15 show snmp user

**Command:**

```
show snmp user
```

**Mode:**

privileged mode

**Usage Guide:**

This command will display the snmp user entry.

**Example:**

The following example specifies that display snmp user test.

```
Switch# show snmp user
```

## 4.24.16 show snmp engineid

**Command:**

```
show snmp engineid
```

**Mode:**

privileged mode

**Usage Guide:**

This command will display the snmp local/remote engine id

**Example:**

The following example specifies that display snmp local/remote engine id test.

```
Switch# show snmp engineid
```

## 4.25 Storm Control

### 4.25.1 Storm-control unit

**Command:**

```
storm-control unit (bps | pps)
```

**Parameter:**

|            |                                               |
|------------|-----------------------------------------------|
| <b>bps</b> | Storm control rate calculates by octet-based  |
| <b>pps</b> | Storm control rate calculates by packet-based |

**Default:**

Default storm control unit is bps.

**Mode:**

Global Configuration

**Usage Guide:**

Storm control mechanism will try to calculate ingress packets is exceed configured rate or not and do corresponding action. This command allows you to change the unit of calculating method

**Example:**

This example shows how to configure storm control rate unit as pps.

```
Switch(config)# storm-control unit pps
```

This example shows how to show storm control global configuration

```
Switch# show storm-control
Storm control preamble and IFG: Excluded
Storm control unit: pps
.....
```

### 4.25.2 storm-control ifg

**Command:**

**storm-control ifg (include | exclude)**

**Parameter:**

- include**                      Include preamble & IFG (20 bytes) when count ingress storm control rate.
- exclude**                     Exclude preamble & IFG (20 bytes) when count ingress storm control rate

**Default:**

Default storm control inter frame gap is excluded.

**Mode:**

Global Configuration

**Usage Guide:**

Storm control mechanism will try to calculate ingress packets is exceed configured rate or not and do corresponding action. This command allows you to decide to include/exclude the preamble and inter frame gap into the calculating or not.

**Example:**

This example shows how to configure storm control rate unit as pps.

Switch(config)# **storm-control ifg include**

This example shows how to show storm control global configuration.

```
Switch# show storm-control
Storm control preamble and IFG: Included
Storm control unit: pps
.....
```

## 4.25.3 storm-control

**Command:**

```
storm-control

no storm-control

storm-control (broadcast | unknown-unicast | unknown-multicast)
```



```
no storm-control (broadcast | unknown-unicast | unknown-multicast)
```

```
storm-control (broadcast | unknown-unicast | unknown-multicast) level <0-1000000>
```

```
no storm-control (broadcast | unknown-unicast | unknown-multicast) level
```

**Parameter:**

|                                |                                                  |
|--------------------------------|--------------------------------------------------|
| <b>broadcast</b>               | Select broadcast storm control type              |
| <b>unknown-unicast</b>         | Select unknown unicast storm control type        |
| <b>unknown-multicast</b>       | Select unknown multicast storm control type      |
| <b>level &lt;0-1000000&gt;</b> | Specify the storm control rate for selected type |

**Default:**

Default broadcast storm control is disabled.

Default unknown multicast storm control is disabled

Default unknown unicast storm control is disabled

Default broadcast storm control rate is 10000.

Default unknown multicast storm control rate is 10000.

Default unknown unicast storm control rate is 10000.

**Mode:**

Interface Configuration

**Usage Guide:**

Storm control function is able to enable/disable on each single port. Use the “**storm control**” command to enable storm control feature on the selected ports. And use “**no storm control**” command to disable storm control feature.

Not only port is able to enable/disable on the port. Each storm control type is also able to enable/disable on each single port. Use the “**storm-control (broadcast | unknown-unicast | unknown-multicast)**” command to enable the storm control type you need and use no form to disable it.

Each control type is allowed to have different storm control rate. Use “**storm-control (broadcast | unknown-unicast | unknown-multicast) level**” command to configure it and use no form to restore to default value.

**Example:**

This example shows how to enable storm control on interface gi1.

```
Switch(config)# interface gi1
Switch(config-if)# storm-control
```

This example shows how to enable broadcast storm control and configure broadcast storm control rate to 200.

```
Switch(config)# interface gi1
```

```
Switch(config-if)# storm-control broadcast
Switch(config-if)# storm-control broadcast level 200
```

This example shows how to show current storm control configuration on interface gi1

```
Switch# show storm-control interfaces gi1
Port | State | Broadcast | Unkown-Multicast | Unknown-Unicast | Action
| | pps | pps | pps |
-----+-----+-----+-----+-----|-----
gi1 enable 200 Off(10000) Off(10000) Shutdown
```

## 4.25.4 storm-control action

### Command:

```
storm-control action (drop | shutdown)

no storm-control action
```

### Parameter:

**(drop | shutdown)** Storm-control action for drop|flood|router-port

### Default:

Default storm control action is drop.

### Mode:

Interface Configuration

### Usage Guide:

The storm control mechanism allows you to drop packets which exceed storm control rate or just shutdown port. Use no form to restore to default action.

### Example:

This example shows how to configure storm control action to shutdown port on interface gi1.

```
Switch(config)# interface gi1
Switch(config-if)# storm-control action shutdown
```

This example shows how to show storm control action on interface gi1.

```
Switch# show storm-control interfaces gi1
Port | State | Broadcast | Unkown-Multicast | Unknown-Unicast | Action
| | pps | pps | pps |
-----+-----+-----+-----+-----+-----|-----
gi1 disable Off(10000) Off(10000) Off(10000) Shutdown
```

## 4.25.5 show storm-control

**Command:**

```
show storm-control

show storm-control interface IF_PORTS
```

**Parameter:**

*IF\_PORTS* Specify port to show.

**Mode:**

Privileged EXEC

**Usage Guide:**

Use “**show storm-control**” command to show all storm control related configurations including global configuration and per port configurations.

Use “**show storm-control interface**” command to show selected port storm control configurations.

**Example:**

This example shows how to show storm control global configuration.

```
Switch# show storm-control
Storm control preamble and IFG: Excluded
Storm control unit: pps
.....
```

This example shows how to show current storm control configuration on interface gi1

```
Switch# show storm-control interfaces gi1
Port | State | Broadcast | Unkown-Multicast | Unknown-Unicast | Action
| | pps | pps | pps |
```

```
-----+-----+-----+-----+-----|-----
fa1 enable 200 Off(10000) Off(10000) Shutdown
```

## 4.26 Spanning Tree

### 4.26.1 spanning-tree

**Command:**

```
spanning-tree
no spanning-tree
```

**Mode:**

Global Configuration

**Usage Guide:**

Enable or Disable Spanning-Tree Protocol. Using `spanning-tree` command to enable STP or `no spanning-tree` command to disable STP

**Example:**

The following example sets the STP status to enable and disable.

```
Switch# configure
Switch(config)# spanning-tree
Switch(config)# exit
Switch# show spanning-tree
Spanning tree enabled mode RSTP
Default port cost method: long
Root ID Priority 32768
Address 00:03:4F:28:55:00
This switch is the root
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
Number of topology changes 1 last change occurred 01:49:43 ago
Times: hold 0, topology change 0, notification 0
hello 2, max age 20, forward delay 15
Interfaces
Name State Prio.Nbr Cost Sts Role EdgePort Type

gi1 enabled 128.1 20000 Frw Desg No P2P
(RSTP)
Switch#
```

## 4.26.2 spanning-tree bpdu

### Command:

```
spanning-tree bpdu (filtering | flooding)
```

### Parameter:

( **filtering** | **flooding** ) Specify the forwarding action of BPDU to filtering or flooding.

### Default:

spanning-tree bpdu flooding

### Mode:

Global Configuration

### Usage Guide:

Configure the BPDU forwarding action when STP is disabled.

### Example:

This example sets the BPDU forwarding action to filtering.

```
Switch# configure
Switch(config)# no spanning-tree
Switch(config)# spanning-tree bpdu filtering
Switch(config)# exit
Switch# show spanning-tree
Spanning tree disabled (BPDU filtering) mode RSTP
Default port cost method: long
Switch#
```

## 4.26.3 spanning-tree mode

### Command:

```
spanning-tree mode (stp | rstp | mstp)
```

**Parameter:**

- stp** Specify the mode to Spanning Tree Protocol
- rstp** Specify the mode to Rapid Spanning Tree Protocol
- mstp** Specify the mode to Multiple Spanning Tree Protocol.

**Default:**

spanning-tree mode stp

**Mode:**

Global Configuration

**Usage Guide:**

Configure the force-version of Spanning-Tree Protocol. The configuration could be shown by “show spanning-tree” command.

**Example:**

This example sets STP mode to STP (Classic Spanning Tree Protocol).

```
Switch# configure
Switch(config)# spanning-tree mode stp
Switch(config)# exit
Switch# show spanning-tree
Spanning tree enabled mode STP
Default port cost method: long
Root ID Priority 32768
Address 00:30:4F:28:55:00
This switch is the root
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
Number of topology changes 1 last change occurred 00:05:13 ago
Times: hold 0, topology change 0, notification 0
hello 2, max age 20, forward delay 15
Interfaces
Name State Prio.Nbr Cost Sts Role EdgePort Type

gi1 enabled 128.1 200000 Dscd Desg No P2P (STP)
Switch#
```

## 4.26.4 spanning-tree priority

**Command:**

```
spanning-tree priority <0-61440>
```

**Parameter:**

**<0-61440>** Specify the bridge priority, it must multiples of 4096

**Default:**

spanning-tree priority 32768

**Mode:**

Global Configuration

**Usage Guide:**

This command configures the bridge priority. The configuration could be shown by “show spanning-tree” command.

**Example:**

This example sets the bridge priority to 16384.

```
Switch# configure
Switch(config)# spanning-tree priority 16384
Switch(config)# exit
Switch# show spanning-tree
Spanning tree enabled mode RSTP
Default port cost method: long
Root ID Priority 16384
Address 00:30:4F:28:55:00
This switch is the root
Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
Number of topology changes 2 last change occurred 00:03:37 ago
Times: hold 0, topology change 0, notification 0
hello 2, max age 20, forward delay 15
Interfaces
Name State Prio.Nbr Cost Sts Role EdgePort Type

gi1 enabled 128.1 20000 Frw Desg No P2P (RSTP)
Switch#
```

## 4.26.5 spanning-tree hello-time



**Command:**

```
spanning-tree hello-time <1-10>
```

**Parameter:**

<1-10> Specify the hello-time interval (second).

**Default:**

spanning-tree hello-time = 2

**Mode:**

Global Configuration

**Usage Guide:**

This command configures the BPDU hello-time interval (second). The configuration could be shown by “show spanning-tree” command.

**Example:**

This example sets the BPDU hello-time to 5 sec.

```
Switch# configure
Switch(config)# spanning-tree hello-time 5
Switch(config)# exit
Switch# show spanning-tree
Spanning tree enabled mode RSTP
Default port cost method: long
Root ID Priority 16384
Address 00:30:4F:28:55:00
This switch is the root
Hello Time 5 sec Max Age 20 sec Forward Delay 15 sec
Number of topology changes 2 last change occurred 00:00:01 ago
Times: hold 0, topology change 0, notification 0
hello 5, max age 20, forward delay 15
Interfaces
Name State Prio.Nbr Cost Sts Role EdgePort Type

gi1 enabled 128.1 20000 Frw Desg No P2P (RSTP)
Switch#
```

## 4.26.6 spanning-tree max-hops

**Command:**

```
spanning-tree max-hops <1-40>
```

**Parameter:**

<1-40> Specify the max-hops value

**Default:**

spanning-tree max-hops = 20

**Mode:**

Global Configuration

**Usage Guide:**

This command configures the maximum hops value for MSTP. The configuration could be shown by “show spanning-tree” command.

**Example:**

This example sets the max-hops to 15.

```
Switch# configure
Switch(config)# spanning-tree max-hops 15
```

## 4.26.7 spanning-tree forward-delay

**Command:**

```
spanning-tree forward-delay <4-30>
```

**Parameter:**

<4-30> Specify the forward-delay interval (second).

**Default:**

spanning-tree forward-delay = 15

**Mode:**

Global Configuration

**Usage Guide:**

This command configures the BPDU forward-delay interval (second). The configuration could be shown by “show spanning-tree” command.

**Example:**

This example sets the BPDU forward-delay to 30 sec.

```
Switch# configure
Switch(config)# spanning-tree forward-delay 30
```

## 4.26.8 spanning-tree maximum-age

**Command:**

```
spanning-tree maximum-age <6-40>
```

**Parameter:**

**<6-40>** Specify the maximum-age time (second).

**Default:**

spanning-tree maximum-age = 20

**Mode:**

Global Configuration

**Usage Guide:**

This command configures the BPDU maximum-age interval (second). The configuration could be shown by “show spanning-tree” command.

**Example:**

This example sets the BPDU maximum-age to 10 sec.

```
Switch# configure
Switch(config)# spanning-tree maximum-age 10
```

## 4.26.9 spanning-tree tx-hold-count

**Command:**

```
spanning-tree tx-hold-count <1-10>
```

**Parameter:**

**<1-10>** Specify the tx-hold-count value.

**Default:**

spanning-tree tx-hold-count = 6

**Mode:**

Global Configuration

**Usage Guide:**

This command configures the BPDU tx-hold-count.

**Example:**

This example sets the BPDU tx hold count to 10

```
Switch# configure
Switch(config)# spanning-tree tx-hold-count 10
```

## 4.26.10 spanning-tree pathcost method

**Command:**

```
spanning-tree pathcost method (long | short)
```

**Parameter:**

**long** Specify the type of pathcost value to 32 bits (long).  
**short** Specify the type of pathcost value to 16 bits (short).

**Default:**

spanning-tree pathcost method = long

**Mode:**

Global Configuration

**Usage Guide:**

This command configures the BPDU pathcost value type to 16bits (short) or 32 bits (long). The configuration could be shown by “show spanning-tree” command.

**Example:**

This example sets the type of pathcost value to short.

```
Switch# configure
Switch(config)# spanning-tree pathcost method short
```

## 4.26.11 spanning-tree port-priority

**Command:**

```
spanning-tree port-priority <0-240>
```

**Parameter:**

**<0-240>** Specify the STP port priority. It must multiples of 16.

**Default:**

spanning-tree port-priority = 128

**Mode:**

Port Configuration

**Usage Guide:**

This command per port configures the STP port priority. The configuration could be shown by “show spanning-tree interface” command.

**Example:**

This example sets port gi1 STP port priority to 64.

```
Switch# configure
Switch(config)# interface gi1
Switch(config-if)# spanning-tree port-priority 64
```

## 4.26.12 spanning-tree cost

**Command:**

```
spanning-tree cost <0-200000000>
```

**Parameter:**

**<0-200000000>** Specify the STP port cost. In short pathcost method, the range is from 0 to 65535. ( 0 = Auto )

**Default:**

spanning-tree cost = 0

**Mode:**

Port Configuration

**Usage Guide:**

This command per port configures the STP port cost. The configuration could be shown by “show spanning-tree interface” command.

**Example:**

This example sets port gi1 STP port cost to 100.

```
Switch# configure
Switch(config)# interface gi1
Switch(config-if)# spanning-tree cost 100
```

## 4.26.13 spanning-tree edge

**Command:**

```
spanning-tree edge
no spanning-tree edge
```

**Mode:**

Port Configuration

**Usage Guide:**

This command per port configures the STP edge port function. The configuration could be shown by “show spanning-tree interface” command.

**Example:**

This example sets port gi1 STP edge port to enable.

```
Switch# configure
Switch(config)# interface gi1
Switch(config-if)# spanning-tree edge
```

## 4.26.14 spanning-tree bpdu-filter

**Command:**

```
spanning-tree bpd-filter

no spanning-tree bpd-filter
```

**Mode:**

Port Configuration

**Usage Guide:**

This command per port configures the STP BPDU Filter status. The configuration could be shown by “show spanning-tree interface” command.

**Example:**

This example sets port gi1 STP BPDU Filter status to enable.

```
Switch# configure
Switch(config)# interface gi1
Switch(config-if)# spanning-tree bpd-filter
```

## 4.26.15 spanning-tree bpd-guard

**Command:**

```
spanning-tree bpd-guard

no spanning-tree bpd-guard
```

**Mode:**

Port Configuration

**Usage Guide:**

This command per port configures the STP BPDU Guard status. The configuration could be shown by “show spanning-tree interface” command.

**Example:**

This example sets port gi1 STP BPDU Guard status to enable.

```
Switch# configure
Switch(config)# interface gi1
```

```
Switch(config-if)# spanning-tree bpduguard
```

## 4.26.16 spanning-tree link-type

### Command:

```
spanning-tree link-type (point-to-point | shared)
```

```
no spanning-tree link-type
```

### Parameter:

( **point-to-point** | **shared** ) Specify the STP port link-type to Point-to-Point or Shared medium.

### Mode:

Port Configuration

### Usage Guide:

This command per port configures the STP port link-type. The configuration could be shown by “show spanning-tree interface” command.

### Example:

This example sets port gi1 STP port link-type to be Shared.

```
Switch# configure
Switch(config)# interface gi1
Switch(config-if)# spanning-tree link-type shared
```

## 4.26.17 spanning-tree mst configuration

### Command:

```
spanning-tree mst configuration
```

```
name NAME
```



```

revision <0-65535>

instance <0-15> vlan [VLAN-LIST]

```

**Parameter:**

|                        |                                                                          |
|------------------------|--------------------------------------------------------------------------|
| <b>NAME</b>            | Specify the MSTP bridge name of MST Configuration ID.<br>(Max. 32 chars) |
| <b>&lt;0-65535&gt;</b> | Specify the MSTP revision number of MST Configuration ID.                |
| <b>&lt;0-15&gt;</b>    | Specify the MST instance ID.                                             |
| <b>VLAN-LIST</b>       | Specify the VLAN list to be mapped to this specified instance.           |

**Default:**

name (Switch's MAC address)  
 revision 0  
 instance 0 vlan all

**Mode:**

Global Configuration

**Usage Guide:**

This command configures the MSTP Configuration ID. The configuration could be shown by "show spanning-tree mst configuration" command.

**Example:**

This example sets MSTP Configuration ID, name to `Region1`, revision to `123` and VLAN 100 mapped to instance 1.

```

Switch# configure
Switch(config)# spanning-tree mst configuration
Switch(config-mst)# name Region1
Switch(config-mst)# revision 123
Switch(config-mst)# instance 1 vlan 100
Switch(config-mst)# exit
Switch(config)# exit
Switch# show spanning-tree mst configuration
Name [Region1]
Revision 123 Instances configured 2
Instance Vlans mapped

0 1-99,101-4094
1 100

```



## 4.26.18 spanning-tree mst priority

### Command:

```
spanning-tree mst <0-15> priority <0-61440>
```

### Parameter:

- <0-15>** Specify the MST instance ID to configure.
- <0-61440>** Specify the bridge priority, it must multiples of 4096.

### Default:

spanning-tree mst = 0 ; priority = 32768

### Mode:

Global Configuration

### Usage Guide:

This command configures the MST instance priority. The configuration could be shown by “show spanning-tree mst” command.

### Example:

This example sets the priority of MST instance 1 to 4096.

```
Switch# configure
Switch(config)# spanning-tree mode mstp
Switch(config)# spanning-tree mst 1 priority 4096
```

## 4.26.19 spanning-tree mst cost

### Command:

```
spanning-tree mst <0-15> cost <0-200000000>
```

### Parameter:

- <0-15>** Specify the MST instance ID to configure.

**<0-200000000>** Specify the STP port cost. In short pathcost method, the range is from 0 to 65535. ( 0 = Auto )

**Default:**

spanning-tree mst = 0 ; cost = 0

**Mode:**

Port Configuration

**Usage Guide:**

This command configures the MSTP port cost for this MST instance. The configuration could be shown by “show spanning-tree mst interface” command.

**Example:**

This example sets port gi1 STP pathcost of MST instance 1 to 100.

```
Switch# configure
Switch(config)# interface gi1
Switch(config-if)# spanning-tree mst 1 cost 100
```

## 4.26.20 spanning-tree mst port-priority

**Command:**

```
spanning-tree mst <0-15> priority <0-240>
```

**Parameter:**

**<0-15>** Specify the MST instance ID to configure.

**<0-240>** Specify the STP port priority. It must multiples of 16.

**Default:**

spanning-tree mst = 0; port-priority = 128

**Mode:**

Port Configuration

**Usage Guide:**

This command configures the MST port priority. The configuration could be shown by “show spanning-tree mst interface” command.

**Example:**

This example sets port gi1 MST port priority of MST instance 0 to 32.

```
Switch# configure
Switch(config)# interface gi1
Switch(config-if)# spanning-tree mst 1 cost 0
Switch(config-if)# exit
Switch(config)# interface gi1
Switch(config-if)# spanning-tree mst 1 port-priority 32
```

## 4.27 System File

### 4.27.1 boot system

**Command:**

```
boot system (image0 | image1)
```

**Parameter:**

|               |                                   |
|---------------|-----------------------------------|
| <b>image0</b> | Boot from flash image partition 0 |
| <b>image1</b> | Boot from flash image partition 1 |

**Default:**

Default boot image is image0.

**Mode:**

Global Configuration

**Usage Guide:**

Dual image allow user to have a backup image in the flash partition. Use "**boot system**" command to select the active firmware image. And another firmware image will become a backup one.

**Example:**

This example shows how to select image1 as active image.

```
Switch(config)# boot system image1
Select "image1" Success
This example shows how to show active image partition.
Switch# show flash
File Name File Size Modified

startup-config 1191 2000-01-01 00:00:23
rsa1 974 2000-01-01 00:00:18
rsa2 1675 2000-01-01 00:00:18
dsa2 668 2000-01-01 00:00:18
ssl_cert 993 2000-01-01 00:00:18
image0 (backup) 4372401 2012-09-24 01:57:29
image1 (active) 5555970 2012-06-12 12:17:46
```

## 4.27.2 save

### Command:

```
save
```

### Mode:

Privileged EXEC

### Usage Guide:

Use “**save**” command to save running configuration to startup configuration file. This command is equal to “**copy running-config startup-config**”.

### Example:

This example shows how to save running configuration to startup configuration.

```
Switch# save
Success
```

## 4.27.3 copy

### Command:

```
copy (flash:// | tftp://) (flash:// | tftp://)

copy tftp:// (backup-config | running-config | startup-config)

copy (backup-config | running-config | startup-config) tftp://

copy (backup-config | startup-config) running-config

copy (backup-config | running-config) startup-config

copy (running-config | startup-config) backup-config
```

### Parameter:

**flash://**

Specify the file stored in flash to operation. Available files are:

flash://startup-config

|                       |                                                                                                           |
|-----------------------|-----------------------------------------------------------------------------------------------------------|
|                       | flash://backup-config                                                                                     |
|                       | flash://image0                                                                                            |
|                       | flash://image1                                                                                            |
|                       | flash://ram.log                                                                                           |
|                       | flash://flash.log                                                                                         |
| <b>fttp://</b>        | Specify remote tftp server and remote file name. The format is<br>"tftp://192.168.1.111/remote_file_name" |
| <b>running-config</b> | Running configuration file                                                                                |
| <b>startup-config</b> | Startup configuration file                                                                                |
| <b>backup-config</b>  | Edit default authentication list                                                                          |

**Mode:**

Privileged EXEC

**Usage Guide:**

There are many types of files in system. These files are very important for administrator to manage the switch. The most common file operation is copy. By using these copy commands, we can upgrade, backup following type of files.

- Firmware Image
- Configuration Files
- Syslog Files

**Example:**

This example shows how to copy running configuration to startup configuration.

```
Switch# copy running-config startupst-config
```

This example shows how to backup running configuration to remote tftp server 192.168.111 with file name test1.cfg.

```
Switch# copy running-config tftp://192.168.1.111/test1.cfg
Uploading file...Please Wait...
Uploading Done
```

This example shows how to upgrade startup configuration from remote tftp server 192.168.1.111 with file name test2.cfg.

```
Switch# copy tftp://192.168.1.111/test2.cfg startup-config
Downloading file...Please Wait...
Downloading Done
Upgrade config success. Do you want to reboot now? (y/n)n
```

This example shows how to backup security file dsa2 to remote tftp server 192.168.1.111 with file name dsa2.

```
Switch# copy flash://dsa2 tftp://192.168.1.111/dsa2
Uploading file...Please Wait...
Uploading Done
```

## 4.27.4 delete

### Command:

```
delete (startup-config | backup-config | flash://)
delete system (image0 | image1)
```

### Parameter:

|                       |                                                                                                                                   |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| <b>flash://</b>       | Specify the configuration file stored in flash to delete. Available files are:<br>flash://startup-config<br>flash://backup-config |
| <b>startup-config</b> | Delete startup configuration file                                                                                                 |
| <b>backup-config</b>  | Delete backup configuration file                                                                                                  |
| <b>image0</b>         | Delete flash image0.                                                                                                              |
| <b>Image1</b>         | Delete flash image1.                                                                                                              |

### Mode:

Privileged EXEC

### Usage Guide:

Use “**delete**” command to delete configuration files or use “**delete system**” command to delete firmware image stored in flash.

The “**delete startup-config**” command is using to restore factory default and it is equal to command “**restore-defaults**”.

### Example:

This example shows how to delete backup configuration file.

```
Switch# delete backup-config
```



This example shows how to delete backup firmware image from flash.

```
Switch# delete system image1
```

## 4.27.5 restore-default

Command:

```
restore-default
```

Mode:

Privileged EXEC

Usage Guide:

Use “**restore-defaults**” command to restore factory default of all system. The command is equal to “**delete startup-config**”

Example:

This example shows how to restore factory defaults.

```
Switch# restore-defaults
Restore Default Success. Do you want to reboot now? (y/n)n
```

## 4.27.6 show config

Command:

```
show (running-config | startup-config | backup-config)
```

Parameter:

|                       |                                        |
|-----------------------|----------------------------------------|
| <b>running-config</b> | Show running configuration on terminal |
| <b>startup-config</b> | Show startup configuration on terminal |
| <b>backup-config</b>  | Show backup configuration on terminal  |

Mode:

Privileged EXEC

**Usage Guide:**

Our configuration file is text based. Therefore, we can show the configuration on terminal and read it by this command.

**Example:**

This example shows how to show running configuration

```
Switch# show running-config
! System Description: Switch
! System Version: v2.5.0-beta.32811
! System Name: SwitchEF0102
! System Up Time: 0 days, 5 hours, 23 mins, 42 secs
!
!
!
!
username "" privilege user secret "dnXencJRwfIV6"
username "admin" secret "FzjrGO6vfbERY"
voice-vlan vpt 0
voice-vlan dscp 0
.....
```

## 4.27.7 show flash

**Command:**

```
show flash
```

**Mode:**

Privileged EXEC

**Usage Guide:**

Use “**show flash**” command to show all files’ status which stored in flash.

**Example:**

This example shows how to show all files status stored in flash.

```
Switch# show flash
File Name File Size Modified
```

-----  
startup-config 1191 2000-01-01 00:00:23

image0 (active) 4372401 2012-09-24 01:57:29

image1 (backup) 0

## 4.28 Time

### 4.28.1 clock set

**Command:**

```
clock set HH:MM:SS (jan|feb|mar|apr|may|jun|jul|aug|sep|oct|nov|dec) <1-31>
<2000-2035>
```

**Parameter:**

**HH:MM:SS** Specify static time of year, month, day, hour, minute, second  
 (jan|feb|mar|apr|ma  
 y|jun|jul|aug|sep|oc  
 t|nov|dec) <1-31>  
 <2000-2035>

**Mode:**

Global Configuration

**Usage Guide:**

Use the **clock set** command to set static time. The static time won't save to configuration file.

**Example:**

The example shows how to set static time of switch. You can verify settings by the following show **show clock** command.

```
switch# clock set 11:03:00 sep 21 2012
11:03:00 DFL(UTC+8) Sep 21 2012
switch# show clock
11:03:21 DFL(UTC+8) Sep 21 2012
No time source
```

### 4.28.2 clock timezone

**Command:**

```
clock timezone ACRONYM HOUR-OFFSET [minutes <0-59>]
```

```
no clock timezone
```

**Parameter:**

**ACRONYM** Specify acronym name of time zone  
**HOUR-OFFSET** Specify hour offset of time zone  
**minutes <0-59>** Specify minute offset of time zone

**Default:**

Default time zone is UTC+8.

**Mode:**

Global Configuration

**Usage Guide:**

Use the **clock timezone** command to set timezone setting. Use the no form of this command to default setting.

**Example:**

The example shows how to set time zone of switch and then restore to default time zone. You can verify settings by the following show show clock command.

```
switch(config)# clock timezone test +5
switch(config)# show clock detail
10:13:27 test(UTC+5) Sep 21 2012
No time source
Time zone:
Acronym is test
Offset is UTC+5
switch(config)# no clock timezone
switch(config)# show clock detail
13:14:50 DFL(UTC+8) Sep 21 2012
No time source
Time zone:
Acronym is DFL
Offset is UTC+8
```

## 4.28.3 clock source

**Command:**

```
clock source (local|ntp)
```

**Parameter:**

|              |                            |
|--------------|----------------------------|
| <b>local</b> | Specify to use static time |
| <b>ntp</b>   | Specify to use sntp time   |

**Default:**

Default is using local time.

**Mode:**

Global Configuration

**Usage Guide:**

Use the **clock source** command to set the source of time. The “**local**” means that use static setting by user manual set. The “**sntp**” means that use remote SNTP server. Use the no form of this command to default setting.

**Example:**

The example shows how to set clock source of switch. You can verify settings by the following show show clock command.

```
switch(config)# clock source ntp
switch(config)# show clock detail
08:32:12 test(UTC+5) Sep 21 2012
No time source
Time zone:
Acronym is DFL
Offset is UTC+8
```

## 4.28.4 clock summer-time

**Command:**

```
clock summer-time ACRONYM date
(jan|feb|mar|apr|may|jun|jul|aug|sep|oct|nov|dec) <1-31> <2000-2037> HH:MM
(jan|feb|mar|apr|may|jun|jul|aug|sep|oct|nov|dec) <1-31> <2000-2037> HH:MM
[<1-1440>]

clock summer-time ACRONYM recurring (usa|eu) [<1-1440>]
```

```

clock summer-time ACRONYM recurring (<1-5>|first|last)
(sun|mon|tue|wed|thu|fri|sat) (jan|feb|mar|apr|may|jun|jul|aug|sep|oct|nov|dec)
HH:MM (<1-5>|first|last) (sun|mon|tue|wed|thu|fri|sat)
(jan|feb|mar|apr|may|jun|jul|aug|sep|oct|nov|dec) HH:MM [<1-1440>]

no clock summer-time

```

**Parameter:**

(jan|feb|mar|apr|may|jun|jul|aug|sep|oct|nov|dec) <1-31> <2000-2037> HH:MM [<1-1440>]

Specify acronym name of time zone

Specify adjust offset of daylight saving time

**usa** Using daylight saving time in the United States that starts on the second Sunday of March and ends on the first Sunday of November

**eu** Using daylight saving time in the Europe that starts on the last Sunday in March and ending on the last Sunday in October

(<1-5>|first|last) Specify ecurring daylight saving time duration.

(sun|mon|tue|wed|thu|fri|sat) (jan|feb|mar|apr|may|jun|jul|aug|sep|oct|nov|dec) HH:MM

**Mode:**

Global Configuration

**Usage Guide:**

Use the **clock summer-time** command to set daylight saving time for system time. The “**usa**” or “**eu**” means that use the global daylight saving policy which defined by international organization. In both the “**date**”and “**recurring**”, the first part of the command specifies when summer time begins, and the second part specifies when it ends. All times are relative to the local time zone. The “**recurring**” means that adjust time every year within the month . Use the no form of this command to default setting.

**Example:**

The example shows how to set clock source of switch. You can verify settings by the following show show clock command.

```
switch(config)# clock source sntp
switch(config)# show clock detail
08:32:12 test(UTC+5) Sep 21 2012
No time source
Time zone:
Acronym is DFL
Offset is UTC+8
```

## 4.28.5 show clock

**Command:**

```
show clock [detail]
```

**Parameter:**

**detail** Show more detail information of clock

**Mode:**

Global Configuration

**Usage Guide:**

Use the **show clock** command to show clock of switch. The “**detail**” means that show more information of clock such as time zone and daylight saving time.

**Example:**

The example shows how to show clock of switch and detail information.

```
Switch(config)# clock source sntp
Switch(config)# clock summer-time DLS recurring usa
Switch(config)# sntp host 192.168.1.100
Switch(config)# show clock
14:34:43 DLS(UTC+9) Sep 25 2012
Time source is sntp
Switch(config)# show clock detail
14:35:39 DLS(UTC+9) Sep 25 2012
Time source is sntp
Time zone:
```



```

Acronym is DFL
Offset is UTC+8
Summertime:
Acronym is DLS
Recurring every year.
Begins at 2 0 3 2:0
Ends at 1 0 11 2:0
Offset is 60 minutes.

```

## 4.28.6 sntp

**Command:**

```

sntp host HOSTNAME [port <1-65535>]

no sntp

```

**Parameter:**

|                             |                                               |
|-----------------------------|-----------------------------------------------|
| <b>HOSTNAME</b>             | Specify ip address or hostname of sntp server |
| <b>port &lt;1-65535&gt;</b> | Specify server port of sntp server            |

**Mode:**

Global Configuration

**Usage Guide:**

Use the sntp command to set remote SNTP server. Default server port is 123. Use the no form of this command to default setting.

**Example:**

The example shows how to set remote SNTP server of switch. You can verify settings by the following show show sntp command.

```

switch(config)# clock source sntp
switch(config)# sntp host 192.168.1.100
switch(config)# show sntp
SNTP is Enabled
SNTP Server address: 192.168.1.100
SNTP Server port: 123

```

## 4.28.7 show sntp

**Command:**

```
show sntp
```

**Mode:**

Global Configuration

**Usage Guide:**

Use the **show sntp** command to remote SNTP server information.

**Example:**

The example shows how to show remote SNTP server.

```
Switch(config)# show sntp
SNTP is Enabled
SNTP Server address: 192.168.1.100
SNTP Server port: 123
```

## 4.29 VLAN

### 4.29.1 vlan

**Command:**

```
vlan

no vlan
```

**Mode:**

Global Configuration

**Usage Guide:**

Create or remove a VLAN entry. Using `vlan` command to enter the VLAN configuration mode.

**Example:**

The following example creates and removes a VLAN entry (100).

```
Switch# configure
Switch (config)# vlan 100
Switch (config-vlan)# exit
Switch (config)# no vlan 100
Switch (config)# exit
Switch#
```

### 4.29.2 vlan name

**Command:**

```
vlan name NAME
```

**Parameter:**

**NAME** Specify the name of the VLAN (Max. 32 chars).

**Mode:**

VLAN Configuration

**Usage Guide:**

Configure the name of a VLAN entry.

**Example:**

This example sets the VLAN name of VLAN 100 to be `VLAN-one-hundred`.

```
Switch# configure
Switch(config)# vlan 100
Switch(config-vlan)# name VLAN-one-hundred
Switch(config-vlan)# exit
Switch(config)#
```

## 4.29.3 switchport mode

**Command:**

```
switchport mode (access | hybrid | trunk [uplink] | tunnel)
```

**Parameter:**

- access**                      Specify the VLAN mode to Access port.
- hybrid**                      Specify the VLAN mode to Hybrid port.
- trunk**                        Specify the VLAN mode to Trunk port.
- uplink**                       Specify the Uplink property on this Trunk port.
- tunnel**                       Specify the VLAN mode to Dot1Q Tunnel port.

**Default:**

Switchport mode trunk

**Mode:**

Port Configuration

**Usage Guide:**

The VLAN mode is used to configure the port for different port role.

**Access port:** Accepts only untagged frames and join an untagged VLAN.

**Hybrid port:** Support all functions as defined in IEEE 802.1Q specification.

**Trunk port:** An untagged member of one VLAN at most, and is a tagged member of zero or more VLANs. If it is an uplink port, it can recognize double tagging on this port.

**Tunnel port:** Port-based Q-in-Q mode.

The configuration could be shown by “show interface switchport” command.

**Example:**

This example sets VLAN mode to Access port.

```
Switch(config)# interface gi12
Switch(config-if)# switchport mode access
```

## 4.29.4 switchport hybrid pvid

### Command:

```
switchport hybrid pvid <1-4094>
```

### Parameter:

**<1-4094>** Specify the port-based VLAN ID on the Hybrid port.

### Default:

switchport hybrid pvid = 1

### Mode:

Port Configuration

### Usage Guide:

This command configures the hybrid port's PVID. The configuration could be shown by "show interface switchport" command.

### Example:

This example sets PVID to 100.

```
Switch# configure
Switch(config)# interface gi10
Switch(config-if)# switchport mode hybrid
Switch(config-if)# switchport hybrid pvid 100
```

## 4.29.5 switchport hybrid ingress-filtering

### Command:

```
switchport hybrid ingress-filtering
```

```
no switchport hybrid ingress-filtering
```

**Mode:**

Port Configuration

**Usage Guide:**

This command per port configures the ingress-filtering status. This filtering is used to filter the frames come from the non-member ingress port. The configuration could be shown by “show interface switchport” command.

**Example:**

This example sets ingress-filtering to disable.

```
Switch# configure
Switch(config)# interface gi10
Switch(config-if)# switchport mode hybrid
Switch(config-if)# switchport hybrid ingress-filtering
```

## 4.29.6 switchport hybrid acceptable-frame-type

**Command:**

```
switchport hybrid acceptable-frame-type (all | tagged-only | untagged-only)
```

**Parameter:**

|                      |                                        |
|----------------------|----------------------------------------|
| <b>all</b>           | Specify to accept all frames           |
| <b>tagged-only</b>   | Specify to only accept tagged frames   |
| <b>untagged-only</b> | Specify to only accept untagged frames |

**Default:**

switchport hybrid acceptable-frame-type = all

**Mode:**

Port Configuration

**Usage Guide:**

This command per port configures the acceptable-frame-type. The configuration could be shown by “show interface switchport” command.

**Example:**

This example sets acceptable-frame-type to tagged-only.

```
Switch# configure
Switch(config)# interface gi10
Switch(config-if)# switchport mode hybrid
Switch(config-if)# switchport hybrid acceptable-frame-type tagged-only
```

## 4.29.7 switchport hybrid allowed vlan add

**Command:**

```
switchport hybrid allowed vlan add VLAN-LIST [(tagged | untagged)]
```

**Parameter:**

|                              |                                                  |
|------------------------------|--------------------------------------------------|
| <b>VLAN-LIST</b>             | Specifies the VLAN list to be added              |
| <b>( tagged   untagged )</b> | Specifies the member type to tagged or untagged. |

**Mode:**

Port Configuration

**Usage Guide:**

This command per hybrid port configures to add the allowed VLAN list. The configuration could be shown by “show interface switchport” command.

**Example:**

This example sets port fa10 VLAN to join the VLAN 100 as tagged member.

```
Switch# configure
Switch(config)# interface gi10
Switch(config-if)# switchport hybrid allowed vlan add 100
```

## 4.29.8 switchport hybrid allowed vlan remove

**Command:**

```
switchport hybrid allowed vlan remove VLAN-LIST
```

**Parameter:**

**VLAN-LIST** Specifies the VLAN list to be removed.

**Mode:**

Port Configuration

**Usage Guide:**

This command per hybrid port configures to remove the allowed VLAN list. The configuration could be shown by “show interface switchport” command.

**Example:**

This example sets port fa10 VLAN to leave the VLAN 100.

```
Switch# configure
Switch(config)# interface gi10
Switch(config-if)# switchport hybrid allowed vlan remove 100
```

## 4.29.9 switchport access vlan

**Command:**

```
switchport access vlan <1-4094>
```

**Parameter:**

**<1-4094>** Specifies the access VLAN ID.

**Mode:**

Port Configuration

**Usage Guide:**

This command per Access port configures the native VLAN ID. The configuration could be shown by “show interface switchport” command

**Example:**

This example sets Access port fa10 native VLAN ID to 100.

```
Switch# configure
Switch(config)# interface gi10
```



```
Switch(config-if)# switchport mode access
Switch(config-if)# switchport access vlan 100
```

## 4.29.10 switchport tunnel vlan

### Command:

```
switchport tunnel vlan <1-4094>
```

### Mode:

Port Configuration

### Usage Guide:

The command per Tunnel port configures the native VLAN. The configuration could be shown by “show interface switchport” command

### Example:

This example sets Tunnel port gi10 native VLAN to 100

```
Switch# configure
Switch(config)# interface gi10
Switch(config-if)# switchport mode tunnel
Switch(config-if)# switchport tunnel vlan 100
```

## 4.29.11 switchport trunk native vlan

### Command:

```
switchport trunk native vlan <1-4094>
```

### Mode:

Port Configuration

### Usage Guide:

The command per Trunk port configures the native VLAN. The configuration could be shown by “show interface switchport” command.

**Example:**

This example sets Trunk port gi10 native VLAN to 100.

```
Switch# configure
Switch(config)# interface gi10
Switch(config-if)# switchport mode trunk
Switch(config-if)# switchport trunk native vlan 100
```

## 4.29.12 switchport trunk allowed vlan

**Command:**

```
switchport trunk allowed vlan (add | remove) (VLAN-LIST | all)
```

**Parameter:**

- ( **add | remove** ) Specify the action to add or remove the allowed VLAN list.
- ( **VLAN-LIST | all** ) Specify the VLAN list or all VLANs to be added or removed.

**Mode:**

Port Configuration

**Usage Guide:**

The command per Trunk port configures the allowed VLAN list. The configuration could be shown by “show interface switchport” command.

**Example:**

This example sets Trunk port gi10 to add the allowed VLAN 100.

```
Switch# configure
Switch(config)# interface gi10
Switch(config-if)# switchport trunk allowed vlan add 100
```

## 4.29.13 switchport default-vlan tagged

**Command:**

```
switchport default-vlan tagged

no switchport default-vlan tagged
```

**Mode:**

Port Configuration

**Usage Guide:**

The command per port configures the membership of the default VLAN to tagged. The configuration could be shown by “show interface switchport” command.

**Example:**

This example sets Trunk port gi10 membership with the default VLAN to tagged.

```
Switch# configure
Switch(config)# interface gi10
Switch(config-if)# switchport default-vlan tagged
```

## 4.29.14 switchport forbidden default-vlan

**Command:**

```
switchport forbidden default-vlan

no switchport forbidden default-vlan
```

**Mode:**

Port Configuration

**Usage Guide:**

The command per port configures the membership of the default VLAN to forbidden. The configuration could be shown by “show interface switchport” command.

**Example:**

This example sets the membership of the default VLAN with port gi10 to forbidden.

```
Switch# configure
Switch(config)# interface gi10
Switch(config-if)# switchport forbidden default-vlan
```

## 4.29.15 switchport forbidden vlan

### Command:

```
switchport forbidden vlan (add | remove) VLAN-LIST
```

### Parameter:

( add | remove )      Add or remove forbidden membership.  
 VLAN-LIST            Specify the VLAN list.

### Mode:

Port Configuration

### Usage Guide:

The command per port configures the membership of the specified VLANs to forbidden. The configuration could be shown by "show interface switchport" command.

### Example:

This example sets the membership of the VLAN 100 with port fa10 to forbidden

```
Switch# configure
Switch(config)# interface gi10
Switch(config-if)# switchport forbidden vlan add 100
```

## 4.29.16 management-vlan

### Command:

```
management-vlan vlan <1-4094>
```

```
no management-vlan
```

### Parameter:

<1-4094>            Specify the VLAN ID of management-vlan.

### Default:

management VLAN = VLAN 1

**Mode:**

Global Configuration

**Usage Guide:**

- (1) Set <1-4094> as management VLAN id; suggest to create the VLAN and make the port to be member of it firstly.
- (2) When use no command, restore management vlan to be default VLAN.
- (3) If want to see management vlan created ,use “show management-vlan”

**Example:**

The following example specifies that management vlan 2 is created

```
Switch(config)# management-vlan vlan 2
```

## 4.29.17 show management-vlan

**Command:**

```
show management-vlan
```

**Parameter:**

|                |                                     |
|----------------|-------------------------------------|
| <b>login</b>   | Add/Edit login authentication list  |
| <b>enable</b>  | Add/Edit enable authentication list |
| <b>default</b> | Edit default authentication list    |

**Mode:**

Global Configuration

**Usage Guide:**

Display information about management vlan

**Example:**

The following example specifies that show management vlan

```
Switch(config)# show management-vlan
```

## 4.29.18 protocol-vlan group

**Command:**

```
vlan protocol-vlan group <1-8> frame-type (ethernet_ii|llc_other|snap_1042)
protocol-value VALUE
no vlan protocol-vlan group <1-8>
```

**Parameter:**

- <1-8>** Specify protocol vlan group to configure
- (ethernet\_ii|llc\_oth** Specify protocol based frame type
- er|snap\_1042)**
- VALUE** Specify protocol value to configure

**Mode:**

Global Configuration

**Usage Guide:**

Use the **vlan protocol-vlan group** Global Configuration mode command to add protocol vlan group with speified proto type and value.

Use the no form of this command to remove protocol vlan group setting.

You can verify your setting by entering the **show vlan proto-vlan Privileged EXEC** command

**Example:**

The following example show how to configure protocol vlan group:

```
Switch(config)# vlan protocol-vlan group 1 frame-type ethernet_ii protocol-value
0x806
Switch(config)# vlan protocol-vlan group 2 frame-type llc_other protocol-value 0x800
Switch# show vlan protocol-vlan
Group ID | Status | Type | value
-----+-----+-----+-----
 1 | Enabled | Ethernet | 0x0806
 2 | Enabled | LLC other | 0x0800
 3 | Disabled | -- | --
 4 | Disabled | -- | --
 5 | Disabled | -- | --
 6 | Disabled | -- | --
 7 | Disabled | -- | --
 8 | Disabled | -- | --
```

## 4.29.19 protocol vlan binding

### Command:

```
vlan protocol-vlan group <1-8> vlan <1-4094>

no vlan protocol-vlan group <1-8>
```

### Parameter:

<1-8> Specify protocol vlan group to binding

<1-4094> Specifies the Proto VLAN ID to configure.

### Mode:

Interface Configuration

### Usage Guide:

Use the **vlan protocol-vlan binding** Interface Configuration mode command to binding protocol VLAN Group on specified interfaces,

Use the no form of this command to cancel protocol VLAN Group Binding.

You can verify your setting by entering the **show vlan protocol-vlan interfaces IF\_PORTS Privileged EXEC** command

### Example:

The following example how to configure Protocol VLAN function on specified interfaces.

```
Switch(config)# interface gi1
Switch(config-if)# vlan protocol-vlan group 1 vlan 2
Switch(config-if)# vlan protocol-vlan group 2 vlan 3
```

## 4.29.20 show protocol vlan group

### Command:

```
show vlan protocol-vlan [group <1-8>]
```

### Parameter:

<1-8> Specify protocol vlan group to display

**Mode:**

Privileged EXEC

**Usage Guide:**

Use the **show vlan proto-vlan** command in EXEC mode to display Proto VLAN group configuration

**Example:**

The following example how to display Proto VLAN group configuration

```
Switch# show vlan protocol-vlan
Group ID | Status | Type | value
-----+-----+-----+-----
 1 | Enabled | Ethernet | 0x0806
 2 | Enabled | LLC other | 0x0800
 3 | Disabled | -- | --
 4 | Disabled | -- | --
 5 | Disabled | -- | --
 6 | Disabled | -- | --
 7 | Disabled | -- | --
 8 | Disabled | -- | --
```

## 4.29.21 show protocol vlan interfaces

**Command:**

```
show vlan protocol-vlan interfaces IF_PORTS
```

**Parameter:**

**IF\_PORTS** Specify interfaces protocol vlan to display

**Mode:**

Privileged EXEC

**Usage Guide:**

Use the **show vlan mac-vlan interface** command in EXEC mode to display the Protocol VLAN interfaces setting

**Example:**

The following example shows how to display the Protocol VLAN interfaces setting



```
Switch# show vlan protocol-vlan interfaces gi1
```

```
Port gi1 :
```

```
Group 1
```

```
Status : Enabled
```

```
VLAN ID : 2
```

```
Group 2
```

```
Status : Enabled
```

```
VLAN ID : 3
```

```
Group 3
```

```
Status : Disabled
```

```
Group 4
```

```
Status : Disabled
```

```
Group 5
```

```
Status : Disabled
```

```
Group 6
```

```
Status : Disabled
```

```
Group 7
```

```
Status : Disabled
```

```
Group 8
```

```
Status : Disabled
```

## 4.30 Voice VLAN

### 4.30.1 voice vlan

**Command:**

```
voice-vlan

no voice-vlan
```

**Mode:**

Global Configuration

**Usage Guide:**

Use the **voice vlan** global configuration command to enable the functional Voice VLAN on the device.

Use the no form of this command to disable voice vlan function.

You can verify your setting by entering the **show voice vlan Privileged EXEC** command.

**Example:**

The following example shows how to change voice vlan state from auto to oui mode.

```
Switch(config)# no voice-vlan
Switch(config)# voice-vlan cos 6
```

### 4.30.2 voice vlan id

**Command:**

```
voice-vlan vlan <1-4094>
```

**Parameter:**

<1-4094> Specify the voice VLAN ID

**Mode:**

Global Configuration

**Usage Guide:**

Use the **voice vlan id** global configuration command to configure the VLAN identifier of the voice VLAN statically

You can verify your setting by entering the **show voice vlan Privileged EXEC** command

**Example:**

The following example shows how to set Voice VLAN ID, before make sure the VLAN EXIST.

```
Switch(config)# voice-vlan vlan 128
```

### 4.30.3 voice vlan oui-table

**Command:**

```
voice-vlan oui-table A:B:C DESCRIPTION
no voice-vlan oui-table A:B:C
```

**Parameter:**

|                    |                                                                              |
|--------------------|------------------------------------------------------------------------------|
| <b>A:B:C</b>       | Specify OUI Mac address to add or remove                                     |
| <b>DESCRIPTION</b> | Specify description of the specified MAC address to the voice VLAN OUI table |

**Mode:**

Global Configuration

**Usage Guide:**

Use the **voice vlan oui-table** global configuration command to add oui mac address to OUI Table

Use the **no** form of this command to remove all or specified oui mac address..

You can verify your setting by entering the **show voice vlan Privileged EXEC** command

**Example:**

This following example shows how to add OUI Mac.

```
Switch(config)#voice-vlan oui-table 00:01:02"Test"
```

### 4.30.4 voice vlan cos

**Command:**

```
voice-vlan cos <0-7> [remark]
```

```
no voice-vlan
```

**Parameter:**

**<0-7>** Specify the voice VLAN Class of Service value in telephone oui mode  
**remark** Specify that the L2 user priority is remarked with the CoS value

**Default:**

The default cos value is 6, remark is disabled.

**Mode:**

Global Configuration

**Usage Guide:**

Use the **voice vlan cos** global configuration command to configure the voice VLAN cos value and 1p remark function  
 You can verify your setting by entering the **show voice vlan Privileged EXEC** command

**Example:**

The following example show how to set cos value and enable 1p remark function

```
Switch(config)# voice-vlan cos 7 remark
```

## 4.30.5 voice vlan aging-time

**Command:**

```
voice-vlan aing-time <30-65536>
```

**Parameter:**

**<30-65536>** Specify the voice VLAN aging timeout interval in minutes

**Default:**

The default aging-timeout value is 1440 minutes

**Mode:**

Global Configuration

**Usage Guide:**

Use the **voice vlan aging-time** global configuration command to configure the voice VLAN aging timeout  
 You can verify your setting by entering the **show voice vlan Privileged EXEC** command

**Example:**

The following example show how to set aging time.

```
Switch(config)# voice-vlan aging-time 720
```

## 4.30.6 voice vlan cos mode

### Command:

```
voice-vlan cos (src | all)

no voice-vlan
```

### Parameter:

- src** Specify QoS attributes are applied to packets with OUIs in the source MAC address.
- all** Specify QoS attributes are applied to packets that are classified to the Voice VLAN.

### Default:

The defaultall port in Src mode.

### Mode:

Interface Configuration

### Usage Guide:

Use the **voice vlan cos mode** Interface configuration command to configure OUI voice VLAN cos mode configuration on an interface

You can verify your setting by entering the **show voice vlan interfaces Privileged EXEC** command

### Example:

The following example how to configure voice packet QoS attributes on an interface

```
Switch(config)#interface range gi1-3
Switch(config-if)#voice-vlan cos all
```

## 4.30.7 voice vlan enable

### Command:

```
voice-vlan
```

```
no voice-vlan
```

**Mode:**

Interface Configuration

**Usage Guide:**

Use the **voice vlan** Interface configuration command to enable OUI voice VLAN configuration on an interface

Use the **no** form of this command to disable voice vlan on an interfaces

You can verify your setting by entering the **show voice vlan Privileged EXEC** command

**Example:**

The following example how to enable voice VLAN function in oui mode on an interface

```
Switch(config)#interface range gi1-3
Switch(config-if)#voice-vlan
```

## 4.30.8 show voice vlan

**Command:**

```
show voice-vlan

show voice-vlan interfaces IF_PORTS
```

**Parameter:**

**IF\_PORTS** Specifies interfaces to display voice VLAN settings in oui mode

**Mode:**

Privileged EXEC

**Usage Guide:**

Use the **show voice vlan** command in EXEC mode to display the voice VLAN status for all interfaces or for a specific interface if the voice VLAN type is OUI

**Example:**

The following example show how to display voice vlan auto mode and oui mode settings

```
Switch# show voice-vlan
```

Administrate Voice VLAN state : disabled

Voice VLAN ID : 1

Voice VLAN Aging : 720 minutes

Voice VLAN CoS : 5

Voice VLAN 1p Remark: enabled

Switch# **show voice-vlan interfaces gi1**

Voice VLAN Aging : 720 minutes

Voice VLAN CoS : 5

Voice VLAN 1p Remark: enabled

OUI table

OUI MAC | Description

-----+-----

00:E0:BB | 3COM

00:03:6B | Cisco

00:E0:75 | Veritel

00:D0:1E | Pingtel

00:01:E3 | Siemens

00:60:B9 | NEC/Philips

00:0F:E2 | H3C

00:09:6E | Avaya

Port | State | Cos Mode

-----+-----+-----

gi1 | Disabled | Src