

## Product Specifications

L3 16-Port 10/100/1000T Ultra PoE + 2-Port 10G SFP+ Managed Switch  
with LCD Touch Screen (400W)

**GS-5220-16UP2XV**

**GS-5220-16UP2XVR**

Version 2.0

This document contains confidential proprietary information and is property of PLANET. The contents of this document should not be disclosed to unauthorized persons without the written consent of PLANET.

### Change History:

Revision:	Date:	Author:	Change List
Version 2.0	2018/8/2	Bryant Wu	Firmware Update to Linux 4.4
Version 1.0	Sep. 11, 2017	Neo Tsai	Initial Release

Author:	Bryant Wu	Editor:	Bryant Wu
Reviewed by:		Approved by:	Kent Kang

## 1. PRODUCT DESCRIPTION



### Amazing Ultra PoE Managed Switches with Layer3 Switching and Security

PLANET GS-5220-16UP2XV(R) PoE Series of cost-optimized, **1.25U**, Gigabit PoE Managed Switches with LCD Touch Screen features PLANET **intelligent PoE** functions to improve the availability of critical business applications. They provide IPv6/IPv4 dual stack management and built-in **Layer 3 OSPF/static routing** Gigabit switching along with **16 10/100/1000BASE-T** ports featuring **75-watt Ultra PoE** and **2 additional 10Gigabit SFP+ ports**. With a total power budget of up to 400 watts for different kinds of PoE applications, the GS-5220-16UP2XV(R) PoE Series with LCD Touch Screen provides a quick, safe and cost-effective PoE network solution for small businesses and enterprises.

### Smart and Intuitive LCD Control

PLANET unique **Smart LCD PoE Switches** provide intuitive touch panel on its front panel that facilitates the Ethernet management and PoE PD management. They greatly promote management efficiency in large-scale network, such as enterprises, hotels, shopping malls, government buildings and other public areas, and feature the following special management and status functions:

- IP address, VLAN and QoS configuration
- PoE management and status
- Port management and status/SFP information
- Troubleshooting: cable diagnostic and remote IP ping
- Maintenance: reboot, factory default and save configuration

### Convenient and Smart ONVIF Devices with Detection Feature

PLANET has newly developed an awesome feature -- ONVIF Support -- which is specifically designed for co-operating with Video IP Surveillances. From the GS-5220-16UP2XV(R) **PoE** Series with the LCD Touch Screen GUI, clients just need one click to search and show all of the ONVIF devices via network application. In addition, clients can upload floor images to the switch series, making the deployments of surveillance and other devices easy for planning and inspection purposes. Moreover, clients can get real-time surveillance's information and online/offline status. They allow PoE reboot control from the GUI.

### 75 Watts of Power over 4-pair UTP

The GS-5220-16UP2XV(R) **PoE** Series with LCD Touch Screen that features **Ultra PoE** adopts the IEEE 802.3at/af standard. Instead of delivering power over 2-pair twisted UTP – be it end-span (Pins 1,2,3 and 6) or mid-span (Pins 4,5,7 and 8), they provide the capability to source up to 75 watts of power by using all the four pairs of standard Cat.5e/6 Ethernet cabling. In the new 4-pair system, two PSE controllers will be used to power both the data pairs and the spare pairs. They can offer more PoE applications, such as:

- PoE PTZ speed dome
- Any network device that needs higher PoE power to work normally
- Thin-client
- AIO (All-in-One) touch PC
- Remote digital signage display

### Built-in Unique PoE Functions for Powered Devices Management

Being the managed PoE switches for surveillance, wireless and VoIP networks, the GS-5220-16UP2XV(R) **PoE** Series with LCD Touch Screen feature the following special PoE management functions:

- PD alive check
- Scheduled power recycling
- PoE schedule
- PoE usage monitoring

### Intelligent Powered Device Alive Check

The GS-5220-16UP2XV(R) **PoE** Series with LCD Touch Screen can be configured to monitor connected PD (powered device) status in real time via ping action. Once the PD stops working and responding, the GS-5220-16UP2XV(R) **PoE** Series with LCD Touch Screen will resume the PoE port power and bring the PD back to work. They will greatly enhance the network reliability through the PoE port resetting the PD's power source and reducing administrator management burden.

### Scheduled Power Recycling

The GS-5220-16UP2XV(R) **PoE** Series with LCD Touch Screen allows each of the connected PoE IP cameras or PoE wireless access points to reboot at a specified time each week. Therefore, they will reduce the chance of IP camera or AP crash resulting from buffer overflow.

### PoE Schedule for Energy Saving

Under the trend of energy saving worldwide and contributing to environmental protection, the GS-5220-16UP2XV(R) **PoE** Series with LCD Touch Screen can effectively control the power supply besides their capability of giving high watts power. The “**PoE schedule**” function helps you to enable or disable PoE power feeding for each PoE port during specified time intervals and it is a powerful function to help SMBs or enterprises save power and money. It also increases security by powering off PDs that should not be in use during non-business hours.

### PoE Usage Monitoring

Via the power usage chart in the web management interface, the GS-5220-16UP2XV(R) PoE Series with LCD Touch Screen enables the administrator to monitor the status of the power usage of the connected PDs in real time. Thus, they greatly enhance the management efficiency of the facilities.

### Layer 3 Routing Support

The GS-5220-16UP2XV(R) PoE Series with LCD Touch Screen enables the administrator to conveniently boost network efficiency by configuring Layer 3 IPv4/IPv6 VLAN static routing manually, and the **OSPFv2** (Open Shortest Path First) settings automatically. The OSPF is an interior dynamic routing protocol for autonomous system based on link state. The protocol creates a database for link state by exchanging link states among Layer 3 switches, and then uses the Shortest Path First algorithm to generate a route table based on that database.

### Cost-effective 10Gbps Uplink Capacity

10G Ethernet is a big leap in the evolution of Ethernet. The two 10G SFP+ slots of the GS-5220-16UP2XV(R) PoE Series with LCD Touch Screen support **dual-speed 10GBASE-SR/LR** or **1000BASE-SX/LX**, meaning the administrator now can flexibly choose the suitable SFP/SFP+ transceiver according to the transmission distance or the transmission speed required to extend the network efficiently. They greatly support SMB network to achieve the maximum performance of 10Gbps in a cost-effective way.

### Redundant AC/DC Power Supply to Ensure Continuous Operation

The GS-5220-16UP2XVR is particularly equipped with one 100~240V AC power supply unit and one 36~60V DC power supply unit to provide an enhanced reliable and scalable redundant power supply. The continuous power system is specifically designed to fulfill the demands of high-tech facilities requiring the highest power integrity. With the 36~60V DC power supply, the GS-5220-16UP2XVR are able to act as a telecom-level device that can be located in the electronic room.

### Environment-friendly, Smart Fan Design for Silent Operation

The GS-5220-16UP2XV(R) PoE Series with LCD Touch Screen features a 19-inch metal housing, a low noise design and an effective ventilation system. They support the smart fan technology that automatically controls the speed of the built-in fan to reduce noise and maintain the temperature of the PoE switch for optimal power output capability. The GS-5220-16UP2XV(R) PoE Series with LCD Touch Screen is able to operate reliably, stably and quietly in any environment without affecting its performance.

### Solution for IPv6 Networking

By supporting IPv6/IPv4 dual stack and plenty of management functions with easy and friendly user interfaces, the GS-5220-16UP2XV(R) PoE Series with LCD Touch Screen is the best choice for IP surveillance, VoIP and wireless service providers to deploy the IPv6 network. They also help the SMBs to step in the IPv6 era with the lowest investment and without having to replace the network facilities while the ISPs construct the IPv6 FTTx edge network.

### Robust Layer 2 Features

The GS-5220-16UP2XV(R) PoE Series with LCD Touch Screen can be programmed for advanced switch management functions, such as dynamic port link aggregation, **Q-in-Q VLAN**, **Multiple Spanning Tree Protocol (MSTP)**, Layer 2/4 QoS, bandwidth control and **IGMP/MLD snooping**. The GS-5220-16UP2XV(R) PoE Series with LCD Touch Screen allows the operation of a high-speed trunk combining with multiple ports.

### **Powerful Security**

The GS-5220-16UP2XV(R) PoE Series with LCD Touch Screen offers a comprehensive **Layer 2 to Layer 4 access control list (ACL)** for enforcing security to the edge. It can be used to restrict to network access by denying packets based on source and destination IP address, TCP/UDP port number or defined typical network applications. Its protection mechanism also comprises **802.1x Port-based** and **MAC-based** user and device authentication. With the **private VLAN** function, communication between edge ports can be prevented to ensure user privacy.

### **Enhanced Security and Traffic Control**

The GS-5220-16UP2XV(R) PoE Series with LCD Touch Screen also provides **DHCP Snooping**, **IP Source Guard** and **Dynamic ARP Inspection** functions to prevent IP snooping from attack and discard ARP packets with invalid MAC address. The network administrator can now construct highly-secure corporate networks with considerably less time and effort than before.

### **User-friendly Secure Management**

For efficient management, the GS-5220-16UP2XV(R) PoE Series with LCD Touch Screen is equipped with console, web and SNMP management interfaces. With the built-in web-based management interface, it offers an easy-to-use, platform independent management and configuration facility. The GS-5220-16UP2XV(R) PoE Series with LCD Touch Screen supports SNMP and it can be managed via any management software based on the standard SNMP v1 or v2 Protocol. For reducing product learning time, the GS-5220-16UP2XV(R) PoE Series with LCD Touch Screen offers **Cisco-like command** via Telnet or console port and customer doesn't need to learn new command from these switches. Moreover, the GS-5220-16UP2XV(R) PoE Series with LCD Touch Screen offers the remotely secure management by supporting **SSH**, **SSL** and **SNMP v3** connection where the packet content can be encrypted at each session.

### **Intelligent SFP/SFP+ Diagnosis Mechanism**

The GS-5220-16UP2XV(R) PoE Series with LCD Touch Screen supports **SFP-DDM (Digital Diagnostic Monitor)** function that greatly helps network administrator to easily monitor real-time parameters of the SFP and SFP+ transceivers, such as optical output power, optical input power, temperature, laser bias current, and transceiver supply voltage.

## 2. PRODUCT FEATURES

### ➤ **Physical Port**

- **16 10/100/1000BASE-T** Gigabit RJ45 copper ports with 16-port **IEEE 802.3af/at/bt Ultra PoE** injector
- **2 10GBASE-SR/LR SFP+ slots**, compatible with 1000BASE-SX/LX/BX SFP
- RJ45 console interface for switch basic management and setup

### ➤ **802.3bt Ultra Power over Ethernet**

- Complies with IEEE 802.3at Power over Ethernet Plus, end-span/mid-span PSE
- Backward compatible with IEEE 802.3af Power over Ethernet
- Up to 16 ports of IEEE 802.3af/IEEE 802.3at/IEEE 802.3bt ultra PoE devices powered
- Supports PoE power up to 75 watts for each ultra PoE port
- Auto detects powered device (PD)
- Circuit protection prevents power interference between ports
- Remote power feeding up to 100 meters
- PoE management
  - Total PoE power budget control
  - Per port PoE function enable/disable
  - PoE admin-mode control
  - PoE port power feeding priority
  - Per PoE port power limitation
  - PD classification detection
  - Temperature threshold control
  - PD alive check
  - PoE schedule

### ➤ **Layer 2 Features**

- Prevents packet loss with back pressure (half-duplex) and IEEE 802.3x pause frame flow control (full-duplex)
- High performance of Store-and-Forward architecture and runt/CRC filtering eliminates erroneous packets to optimize the network bandwidth
- Storm Control support
  - Broadcast/Multicast/Unknown unicast
- Supports **VLAN**
  - IEEE 802.1Q tagged VLAN
  - Up to 255 VLANs groups, out of 4094 VLAN IDs
  - Supports provider bridging (VLAN Q-in-Q, IEEE 802.1ad)
  - Private VLAN Edge (PVE)
  - Protocol-based VLAN
  - MAC-based VLAN
  - Voice VLAN
- Supports Spanning Tree Protocol
  - IEEE 802.1D Spanning Tree Protocol
  - IEEE 802.1w Rapid Spanning Tree Protocol
  - IEEE 802.1s Multiple Spanning Tree Protocol, spanning tree by VLAN
  - BPDU Guard
- Supports **Link Aggregation**
  - 802.3ad Link Aggregation Control Protocol (LACP)
  - Cisco ether-channel (static trunk)

–Maximum 9 trunk groups, up to 2 ports per trunk group

- Provides port mirror (many-to-1)
- Port mirroring to monitor the incoming or outgoing traffic on a particular port
- Loop protection to avoid broadcast loops
- Supports E.R.P.S. (Ethernet Ring Protection Switching)

➤ **Layer 3 Features**

- Supports maximum 128 static routes and route summarization
- IP dynamic routing protocol supports OSPFv2
- Routing interface provides per VLAN routing mode

➤ **Quality of Service**

- Ingress Shaper and Egress Rate Limit per port bandwidth control
- 8 priority queues on all switch ports
- Traffic classification
  - IEEE 802.1p CoS
  - TOS/DSCP/IP precedence of IPv4/IPv6 packets
  - IP TCP/UDP port number
  - Typical network application
- Strict priority and Weighted Round Robin (WRR) CoS policies
- Supports QoS and In/Out bandwidth control on each port
- Traffic-policing on the switch port
- DSCP remarking

➤ **Multicast**

- Supports IGMP snooping v1, v2 and v3
- Supports MLD snooping v1 and v2
- Querier mode support
- IGMP snooping port filtering
- MLD snooping port filtering
- Multicast VLAN Registration (MVR) support

➤ **Security**

- Authentication
  - IEEE 802.1x port-based/MAC-based network access authentication
  - Built-in RADIUS client to cooperate with the RADIUS servers
  - TACACS+ login users access authentication
  - RADIUS/TACACS+ users access authentication
- Access Control List
  - IP-based Access Control List (ACL)
  - MAC-based Access Control List
- Source MAC/IP address binding
- DHCP Snooping to filter untrusted DHCP messages
- Dynamic ARP Inspection discards ARP packets with invalid MAC address to IP address binding
- IP Source Guard prevents IP spoofing attacks
- IP address access management to prevent unauthorized intruder

➤ **Management**

- IPv4 and IPv6 dual stack management
- Switch Management Interfaces

- Console/Telnet Command Line Interface
- Web switch management
- SNMP v1, v2c, and v3 switch management
- SSH/SSL secure access
- 2.4-inch color LCD touch screen

■ IPv6 IP address/NTP/DNS management

■ Built-in Trivial File Transfer Protocol (TFTP) client

■ BOOTP and DHCP for IP address assignment

■ System Maintenance

- Firmware upload/download via HTTP/TFTP
- Reset button for system reboot or reset to factory default
- Dual images

■ DHCP Relay

■ DHCP Option 82

■ User Privilege levels control

■ NTP (Network Time Protocol)

■ Link Layer Discovery Protocol (LLDP) and LLDP-MED

■ Network Diagnostic

- ICMPv6/ICMPv4 remote ping
- Cable diagnostic technology provides the mechanism to detect and report potential cabling issues

■ SMTP/Syslog remote alarm

■ Four RMON groups (history, statistics, alarms and events)

■ SNMP trap for interface Link Up and Link Down notification

■ System Log

■ PLANET Smart Discovery Utility for deployment management

■ Smart fan with speed control

➤ **Redundant Power System (GS-5220-16UP2XVR)**

■ Redundant 100~240V AC/36-60V DC dual power

■ Active-active redundant power failure protection

■ Backup of catastrophic power failure on one supply

■ Fault tolerance and resilience





### 3. PRODUCT SPECIFICATIONS

#### 3.1 MAIN COMPONENTS

<b>Switch ASIC:</b>	Microsemi VSC7444	x 1
<b>CPU:</b>	MIPS 500MHz (integrated with VSC7444)	x 1
<b>Gigabit PHY</b>	Microsemi VSC8512	x 2
<b>Flash Size</b>	32M bytes	x 1
<b>DRAM Size</b>	256M bytes	x 1
<b>PoE Controller</b>	Microsemi PD69200C	x 1
<b>PSE PoE Manager</b>	Microsemi PD69208M	x 4

#### 3.2 FUNCTION SPECIFICATIONS

Product	GS-5220-16UP2XV	GS-5220-16UP2XVR
<b>Hardware Specifications</b>		
<b>Hardware Version</b>	2	
<b>Copper Ports</b>	16 10/100/1000BASE-T RJ45 auto-MDI/MDI-X ports	
<b>SFP+ Slots</b>	2 10GBASE-SR/LR SFP+ interfaces (Port-17 to Port-18) Compatible with 1000BASE-SX/LX/BX SFP transceiver	
<b>Console</b>	1 x RS232-to-RJ45 serial port (115200, 8, N, 1)	
<b>Switch Architecture</b>	Store-and-Forward	
<b>Switch Fabric</b>	72Gbps/non-blocking	
<b>Throughput</b>	53.57Mpps@64Bytes	
<b>Address Table</b>	16K entries, automatic source address learning and aging	
<b>Shared Data Buffer</b>	32M bits	
<b>Flow Control</b>	IEEE 802.3x pause frame for full-duplex Back pressure for half-duplex	
<b>Jumbo Frame</b>	10K bytes	
<b>Reset Button</b>	< 5 sec: System reboot > 5 sec: Factory default	
<b>Dimensions (W x D x H)</b>	440 x 300 x 56 mm, 1.25U height	
<b>Weight</b>	4558g	4658g
<b>LED</b>	<p><b>System:</b>            SYS (Green)            AC/PWR (Green)            DC (Green) (GS-5220-16UP2XVR Only)            Ring (Green)            Fan1/2/3 Alert (Red)            PoE PWR Alert (Red)</p> <p><b>PoE Ethernet Interfaces (Port-1 to Port-16):</b>            bt PoE (Green) , af/at PoE (Orange)</p> <p><b>Ethernet Interfaces (Port-1 to Port-16):</b>            1000 LNK/ACT (Green), 10/100 LNK/ACT (Orange)</p> <p><b>1/10G SFP+ Interfaces (Port-17 to Port-18):</b></p>	

	1G (Green), 10G (Orange)	
<b>Power Consumption</b>	Max. 468 watts/1569.88 BTU	AC: Max. 468 watts/1569.88 BTU DC: Max. 36.6 watts/124.88 BTU
<b>Power Requirements – AC</b>	AC 100~240V, 50/60Hz, 4.3A	
<b>Power Requirements – DC</b>	--	DC 36~60V, 2A
<b>ESD Protection</b>	6KV DC	
<b>Fan</b>	3 smart fans	
<b>Power over Ethernet</b>		
<b>PoE Standard</b>	IEEE 802.3af/802.3at/802.3bt Ultra PoE PSE	
<b>PoE Power Supply Type</b>	End-span/Mid-span/UPoE	
<b>PoE Power Output</b>	Per port 53V DC, 75 watts (max.)	
<b>Power Pin Assignment</b>	End-span: 1/2(-), 3/6(+) Mid-span: 4/5(+), 7/8(-) UPoE: 1/2(-), 3/6(+), 4/5(+), 7/8(-)	
<b>PoE Power Budget</b>	400 watts (max.)	
<b>PoE Ability PD @ 15 watts</b>	16 units	
<b>PoE Ability PD @ 30 watts</b>	13 units	
<b>PoE Ability PD @ 60 watts</b>	6 units	
<b>Layer 2 Management Functions</b>		
<b>Port Configuration</b>	Port disable/enable Auto-negotiation 10/100/1000Mbps full and half duplex mode selection Flow control disable/enable	
<b>Port Status</b>	Display each port's speed duplex mode, link status, flow control status, auto-negotiation status, trunk status	
<b>Port Mirroring</b>	TX/RX/Both Many-to-1 monitor	
<b>VLAN</b>	802.1Q tagged based VLAN Q-in-Q tunneling Private VLAN Edge (PVE) MAC-based VLAN Protocol-based VLAN Voice VLAN MVR (Multicast VLAN registration) Up to 255 VLAN groups, out of 4095 VLAN IDs	
<b>Link Aggregation</b>	IEEE 802.3ad LACP/static trunk 9 groups with 2 port per trunk	
<b>Spanning Tree Protocol</b>	IEEE 802.1D Spanning Tree Protocol (STP) IEEE 802.1w Rapid Spanning Tree Protocol (RSTP) IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)	
<b>QoS</b>	Traffic classification based, strict priority and WRR 8-level priority for switching: <ul style="list-style-type: none"> <li>- Port number</li> <li>- 802.1p priority</li> <li>- 802.1Q VLAN tagging</li> <li>- DSCP/ToS field in IP packet</li> </ul>	
<b>IGMP Snooping</b>	IGMP (v1/v2/v3) snooping, up to 255 multicast groups	

	IGMP querier mode support	
<b>MLD Snooping</b>	MLD (v1/v2) snooping, up to 255 multicast groups MLD querier mode support	
<b>Access Control List</b>	IP-based ACL/MAC-based ACL Up to 256 entries	
<b>Bandwidth Control</b>	Per port bandwidth control Ingress: 100Kbps~1000Mbps Egress: 100Kbps~1000Mbps	
<b>Layer 3 Functions</b>		
<b>IP Interfaces</b>	Max. 128 VLAN interfaces	
<b>Routing Table</b>	Max. 128 routing entries	
<b>Routing Protocols</b>	IPv4 OSPFv2 IPv4 hardware static routing IPv6 hardware static routing	
<b>Management</b>		
<b>Basic Management Interfaces</b>	Console; Telnet; Web browser; SNMP v1, v2c; 2.4-inch color LCD touch screen	
<b>Secure Management Interfaces</b>	SSH, SSL, SNMP v3	
<b>SNMP MIBs</b>	RFC 1213 MIB-II RFC 1493 Bridge MIB RFC 1643 Ethernet MIB RFC 2863 Interface MIB RFC 2665 Ether-Like MIB RFC 2819 RMON MIB (Groups 1, 2, 3 and 9) RFC 2737 Entity MIB	RFC 2618 RADIUS Client MIB RFC 2863 IF-MIB RFC 2933 IGMP-STD-MIB RFC 3411 SNMP-Frameworks-MIB RFC 4292 IP Forward MIB RFC 4293 IP MIB RFC 4836 MAU-MIB IEEE 802.1X PAE LLDP
<b>Standards Conformance</b>		
<b>Regulatory Compliance</b>	FCC Part 15 Class A, CE	
<b>Standards Compliance</b>	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX/100BASE-FX IEEE 802.3z Gigabit SX/LX IEEE 802.3ab Gigabit 1000T IEEE 802.3ae 10Gb/s Ethernet IEEE 802.3x flow control and back pressure IEEE 802.3ad port trunk with LACP IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.1s Multiple Spanning Tree Protocol IEEE 802.1p Class of Service	IEEE 802.1Q VLAN tagging IEEE 802.1x Port Authentication Network Control IEEE 802.1ab LLDP IEEE 802.3af Power over Ethernet IEEE 802.3at Power over Ethernet Plus IEEE 802.3bt 4-pair Power over Ethernet RFC 768 UDP RFC 793 TFTP RFC 791 IP RFC 792 ICMP RFC 2068 HTTP RFC 1112 IGMP v1 RFC 2236 IGMP v2 RFC 3376 IGMP v3 RFC 2710 MLD v1 RFC 3810 MLD v2

Environment	
Operating	Temperature: 0 ~ 50 degrees C Relative Humidity: 5 ~ 95% (non-condensing)
Storage	Temperature: -10 ~ 70 degrees C Relative Humidity: 5 ~ 95% (non-condensing)




### 3.3 PHYSICAL SPECIFICATIONS:

**Dimensions:**

440 x 300 x 56 mm (W x D x H), 1.25U height

**Weight:**

**GS-5220-16UP2XV:** 4558g

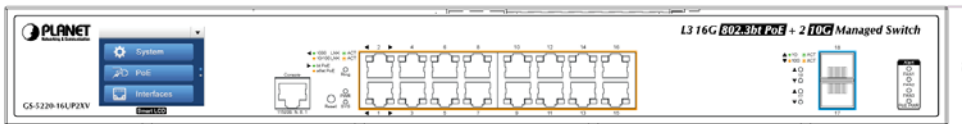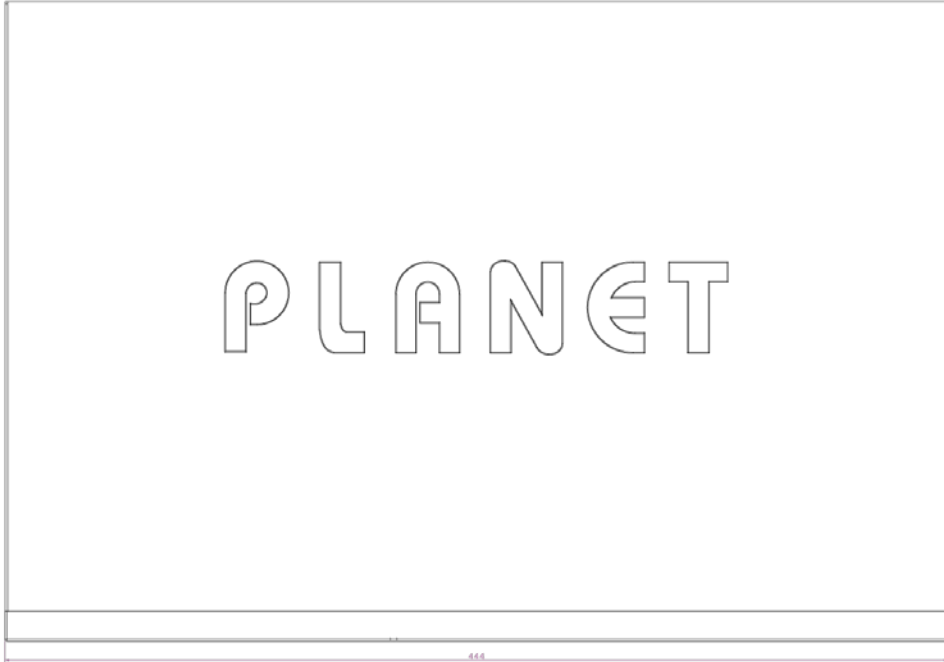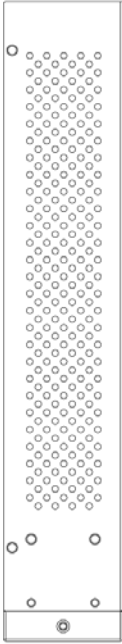

*Dimensions (unit = mm)*



■ LED Definition

■ System/Alert (GS-5220-16UP2XV)

LED	Color	Function
PWR	Green	Lights to indicate that the Switch has power.
SYS	Green	Lights to indicate the system is working. Off to indicate the system is booting.
Ring	Green	Lights to indicate that the ERPS Ring has been created successfully.
FAN 1	Red	Lights to indicate that FAN1 is down.
FAN 2	Red	Lights to indicate that FAN2 is down.
FAN 3	Red	Lights to indicate that FAN3 is down.
PoE PWR	Red	Lights to indicate that the PoE power is down.

■ System/Alert (GS-5220-16UP2XVR)

LED	Color	Function
AC	Green	Lights to indicate that the Switch has power from AC
DC	Green	Lights to indicate that the Switch has power from DC
SYS	Green	Lights to indicate the system is working. Off to indicate the system is booting.
Ring	Green	Lights to indicate that the ERPS Ring has been created successfully.
FAN 1	Red	Lights to indicate that FAN1 is down.
FAN 2	Red	Lights to indicate that FAN2 is down.
FAN 3	Red	Lights to indicate that FAN3 is down.
PoE PWR	Red	Lights to indicate that the PoE power is down.

■ 10/100/1000BASE-T Interfaces (Port-1 to Port-16)


LED	Color	Function
Ethernet	Green	Lights: To indicate that the port is operating at 1000Mbps. Blinks: To indicate that the switch is actively sending or receiving data over that port.
	Orange	Lights: To indicate that the port is operating at 10/100Mbps. Blinks: To indicate that the switch is actively sending or receiving data over that port.
PoE	Green	Lights: To indicate the port is providing DC in-line power with Ultra PoE mode. Off: To indicate the connected device is not a PoE Powered Device (PD)
	Orange	Lights: To indicate the port is providing DC in-line power with End-span/Mid-span mode.. Off: To indicate the connected device is not a PoE Powered Device (PD)

■ 1/10GBASE-SR/LR SFP+ Interfaces (Port-17 to Port-18)


LED	Color	Function
10G	Orange	Lights: To indicate that the port is operating at 10Gbps. Blinks: To indicate that the switch is actively sending or receiving data over that port.
1000	Green	Lights: To indicate that the port is operating at 1000Mbps. Blinks: To indicate that the switch is actively sending or receiving data over that port.

■ Rear Panel:

■ GS-5220-16UP2XV

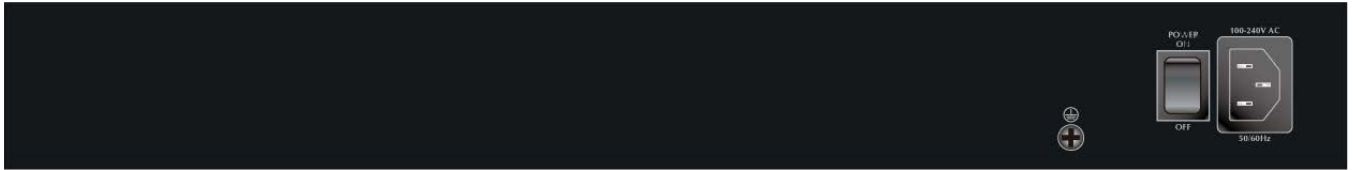

■ GS-5220-16UP2XVR

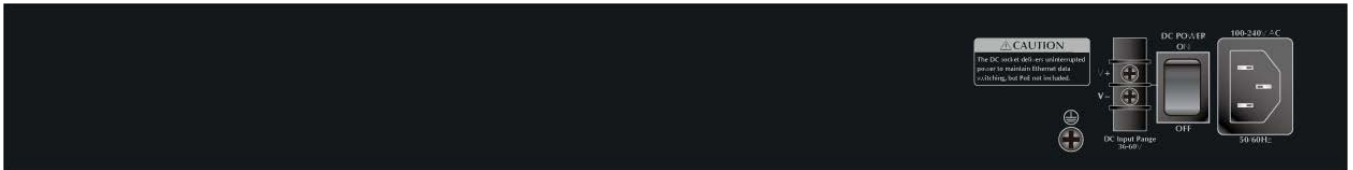

**3.4 ENVIRONMENTAL SPECIFICATIONS**

**Operating:**

Temperature: 0°C ~ 50°C

Relative Humidity: 5% ~ 95% (non-condensing)

**Storage:**

Temperature: -10°C ~ 70°C

Relative Humidity: 5% ~ 95% (non-condensing)

**3.5 ELECTRICAL SPECIFICATIONS**

Model		GS-5220-16UP2XV	GS-5220-16UP2XVR
36~60V DC Power Input		--	36.6 watts/124.88 BTU
100~240V AC Power Input	System on	32 watts/109.189 BTU	32 watts/109.189 BTU
	PoE Full Loading	468 watts/ 1569.88 BTU	468 watts/ 1569.88 BTU

**3.6 REGULATORY COMPLIANCE**

FCC Class A, CE.

**3.7 RELIABILITY**

MTBF > 50,000 hrs @ 25 degrees C



### 3.8 BASIC PACKAGING

- The Managed Switch x 1
- Quick Installation Guide x 1
- RJ45-to-DB9 RS232 cable x 1
- Two Rack-mounting Brackets with Attachment Screws x 1
- Power Cord x 1
- SFP Dust Cap x 2

### 3.9 PACKING DIMENSIONS

<b>Box Dimensions (W x D x H):</b>	567 x 392 x 93mm
<b>Gross Weight:</b>	5.5kg
<b>Carton Dimensions (W x D x H):</b>	600 x 221 x 432mm
<b>Total Weight:</b>	11.0kg
<b>Quantity:</b>	2pcs per carton